

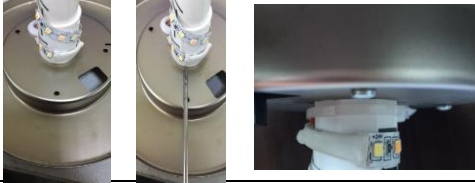








1	General information	Supplier's name or trade mark	INSPIRE		
2		Supplier's address	ADEO Services, 135 rue Sadi Carnot - CS0001, 59790 RONCHIN		
3		Model Identifier - Luminaire Supplier reference	FLD02IR		
4		Light sources maker model	LED Module		
5	Type of light source:	Lighting technology used:	LED		
6		Light source cap type (or other electric interface)	Direct Wired		
7		Non-directional (NDLS) or directional (DLS):	NDLS		
8		Mains (MLS) or non-mains (NMLS):	NMLS		
9		Connected light source (CLS):	no		
10		Colour-tuneable light source:	no		
11		Envelope:	no		
12		High luminance light source:	no		
13		Anti-glare shield:	no		
14		Dimmable:	yes		
15	General product parameters:	Energy consumption in on-mode (kWh/1000 h)	14	kWh/1000h	
16		Energy efficiency class	E		
17		Useful luminous flux ( $\Phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°), expressed in Lm	1800 in a sphere (360°)	Lm	
18		Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3000/4000/6500	K	
19		On-mode power ( $P_{on}$ ), expressed in W	14.0	W	
20		Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0.35	W	
21		Networked standby power (Pnet) for CLS, expressed in W and rounded to the second decimal		W	
22		Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82		
23		Outer dimensions without separate control gear, lighting control parts and nonlighting control parts, if any (millimetre)			
			Height (mm)		mm
			Width (mm)		mm
			Depth (mm)		mm
24		Spectral power distribution in the range 250 nm to 800 nm, at full-load (insert picture of the spectral power distribution)			
25		Claim of equivalent power	yes		
26	If yes, equivalent power (W)	115	W		
27	Chromaticity coordinates (x and y)	x: 0.308 y: 0.331			
28	Parameters for directional light sources:	Peak luminous intensity (cd)		cd	
29		Beam angle in degrees, or the range of beam angles that can be set		Degrees	
30	Parameter for LED and OLED light sources:	R9 colour rendering index value	1		
31		Survival factor (>xx %)	90.00	%	
32		Lumen maintenance factor (>xx %)	89.85	%	
33	Parameters for LED and OLED mains lights sources:	displacement factor (cos $\phi$ 1)	0.80		
34		Colour consistency in McAdam ellipses	4		
35		Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.			
36		If yes then replacement claim (W)		W	
37		Flicker metric (Pst LM)	0.1		
38	Stroboscopic effect metric (SVM)	0.1			

1	General information	Supplier's name or trade mark	INSPIRE
2		Supplier's address	ADEO Services, 135 rue Sadi Carnot - CS0001, 59790 RONCHIN
3		Model Identifier - Luminaire Supplier reference	FLL002IR
4		Light sources maker model	LED Module

Instructions on how to remove lighting control parts and/or non-lighting parts, if any, or how to switch them off or minimise their power consumption during light source testing

	Explanation of the step	Pictures	Tools
<b>Step 1</b>	Loosen the screw		
<b>Step 2</b>	Open the bottom cover		
<b>Step 3</b>	loosen the wire		
<b>Step 4</b>	Remove the lamp shade		
<b>Step 5</b>	Loosen the screw and open the button cover		
<b>Step 6</b>	Release the terminal		
<b>Step 7</b>	Loose the top cover		

<p><b>Step 8</b></p>	<p>Replace with the new LED module</p>		
<p><b>Step 9</b></p>	<p>Before installing the top cover, the screw position here shall be aligned with the root of the heat shrinkable tube (to avoid shading).</p>		
<p><b>Step 10</b></p>	<p>Install the top cover and tighten the outer hexagon screw</p>		
<p><b>Step 11</b></p>	<p>Put in 2P lines</p>		
<p><b>Step 12</b></p>	<p>Connect the terminal</p>		
<p><b>Step 13</b></p>	<p>Close the key cover and tighten the screws</p>		
<p><b>Step 14</b></p>	<p>Install the lampshade</p>		
<p><b>Step 15</b></p>	<p>Connect the wire</p>		
<p><b>Step 16</b></p>	<p>Cover the bottom cover, tighten the screws, and replace the light source module</p>	