

EMC Test Report

Applicant: SUMEC Hardware & Tools Co., Ltd.

Product: Robotic lawnmower, powered by battery

Model: LLS BL300i/YG (Details refer to page 3)

In accordance with EN 301 489-1, Draft EN 301 489-3,

EN 3014 89-17, EN 61000-3-2, EN 61000-3-3,

EN 55014-1 and EN 55014-2



China



Add value.
Inspire trust.

Prepared for: SUMEC Hardware & Tools Co., Ltd.

No.1 Xinghuo Road Jiangbei New Area 210061 Nanjing, Jiangsu PEOPLE'S
REPUBLIC OF CHINA

COMMERCIAL-IN-CONFIDENCE

Report Number: 4840320329801A

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Approved By	Jun Bao		
Prepared By	Zhilan Xue		

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service control rules.

EXECUTIVE SUMMARY

Two samples of this product were tested and found to be in compliance with EN 301 489-1 V2.2.3:2019, Draft EN 301 489-3 V2.1.2:2021, EN 301 489-17 V3.2.4:2020, EN 55014-1:2017, EN 55014-2:2015, EN IEC 61000-3-2:2019, EN 61000-3-3:2013/A1:2019.

DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD Product Service with all reasonable skill and care. The reports apply only to the specific samples tested under stated test conditions. The document is confidential to the potential Client and TÜV SÜD Product Service. No part of this document may be reproduced without the prior written approval of TÜV SÜD Product Service.

TÜV SÜD Certification and Testing
(China) Co., Ltd.

No.10 Huaxia Road (M), Dongting,
Wuxi, 214100
P.R.China

Phone: +86 510 8820 3737
Fax: +86 510 8820 3636
www.tuv-sud.cn

ID Number: EMC_WUX_F_25.43E
Revision:01
Effective:2019-06-25





Contents

1	Report Summary	3
1.1	Report Modification Record.....	3
1.2	Introduction.....	3
1.3	Brief Summary of Results	4
1.4	Product Information	5
1.5	Deviations from the Standard.....	7
1.6	Test Location.....	8
2	Test Details	9
2.1	Radiated Emissions (Enclosure Port)	9
2.2	Conducted Emissions.....	101
2.3	Harmonic current emissions (AC Power Port)	244
2.4	Voltage fluctuations & flicker (AC Power Port).....	271
2.5	Immunity to Electrostatic Discharge (Enclosure Port).....	286
2.6	Immunity to Radio Frequency Electromagnetic Field (Enclosure Port)	289
2.7	Immunity to Fast Transients	292
2.8	Immunity to Surges (AC Power Port)	295
2.9	Immunity to Radio Frequency	298
2.10	Immunity to Voltage dips and interruptions (AC Power Port)	301
3	Test Equipment Information	304
3.1	General Test Equipment Used.....	304
4	Measurement Uncertainty	306
5	Photographs	307

1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	17/02/2022

1.2 Introduction

The information contained in this report is intended to show verification of the EMC Qualification Approval Testing of the requirements of the standards for the tests listed in Section 1.3.

Applicant	SUMEC Hardware & Tools Co., Ltd.
address	No.1 Xinghuo Road Jiangbei New Area 210061 Nanjing, Jiangsu PEOPLE'S REPUBLIC OF CHINA
Manufacturer	SUMEC Hardware & Tools Co., Ltd.
address	No.1 Xinghuo Road Jiangbei New Area 210061 Nanjing, Jiangsu PEOPLE'S REPUBLIC OF CHINA
Factory	SUMEC Manufacturing Venture Co., Ltd.
Model Number(s)	LLS Bxy/zG, LLS BLxy/zG, LLS Bxy/zC, LLS BLxy/zC, (x=250-600,An integer multiple of 10; y=NULL,i,B;z=Y,B,G)
Rated input voltage/frequency	DC 20V (Built-in Rechargeable Li-ion Battery); 100-240V, 50/60Hz (with FY2401500S1 charger, FY2401500S2 charger, FY2401500S3 charger)
Serial Number(s)	Null
Number of Samples Tested	2 (LLS BL300i/YG, LLS BL300B/YG)
Test Specification	EN 301 489-1 V2.2.3:2019, Draft EN 301 489-3 V2.1.2:2021, EN 301 489-17 V3.2.4:2020 EN 55014-1:2017, EN 55014-2:2015, EN IEC 61000-3-2:2019, EN 61000-3-3:2013/A1:2019
Date of Receipt of EUT	28/09/2021
Start of Test	28/09/2021
Finish of Test	17/12/2021
Name of Engineer(s)	Zhilan Xue

NOTICE: This report is a SUPPLEMENT OF PROJECT 4840320329800A. So the report is not valid without the report of 4840320329800A.

This report is issued due to add BLE and Wi-Fi modules for the models: LLS Bxy/zG, LLS BLxy/zG, LLS Bxy/zC, LLS BLxy/zC, (x=250-600,An integer multiple of 10; y=NULL,i,B;z=Y,B,G). (Details see Clause 1.4.1)

1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with EN 301 489-1, EN 61000-3-2, EN 61000-3-3, EN 55014-1 and EN 55014-2 is shown below.

Section	Specification	Clause	Test Description	Result	Comments/Base Standard
2.1	ETSI EN 301 489-1:V2.2.3 (2019-11)	8.2	Radiated Emissions	Pass	EN 55032:2015 Class B
2.1	EN 55014-1:2017	4.3.4.5	Radiated Emissions	Pass	The limit is same with EN 55032:2015 Class B
2.2	ETSI EN 301 489-1:V2.2.3 (2019-11)	8.4	Conducted Emissions	Pass	EN 55032:2015
2.2	EN 55014-1:2017	4.3.3.6	Conducted Emissions	Pass	The limit is a little higher than EN 55032:2015 Class B
2.3	ETSI EN 301 489-1:V2.2.3 (2019-11)	8.5	Harmonics Currents Emissions	Pass	EN 61000-3-2:2014
2.4	ETSI EN 301 489-1:V2.2.3 (2019-11)	8.6	Voltage Fluctuations & Flicker	Pass	EN 61000-3-3:2013
2.5	ETSI EN 301 489-1:V2.2.3 (2019-11)	9.3	Immunity to Electrostatic Discharge	Pass	EN 61000-4-2
2.5	EN 55014-2	5.1	Immunity to Electrostatic Discharge	Pass	IEC 61000-4-2
2.6	ETSI EN 301 489-1:V2.2.3 (2019-11)	9.2	Immunity to Radio Frequency Electromagnetic Field	Pass	EN 61000-4-3
2.6	EN 55014-2	5.5	Immunity to Radio Frequency Electromagnetic Field	Pass	IEC 61000-4-3
2.7	ETSI EN 301 489-1:V2.2.3 (2019-11)	9.4	Immunity to Fast Transients, Common Mode	Pass	EN 61000-4-4
2.7	EN 55014-2	5.2	Immunity to Fast Transients, Common Mode	Pass	IEC 61000-4-4
2.8	ETSI EN 301 489-1:V2.2.3 (2019-11)	9.8	Immunity to Surges	Pass	EN 61000-4-5
2.8	EN 55014-2	5.6	Immunity to Surges	Pass	IEC 61000-4-5
2.9	ETSI EN 301 489-1:V2.2.3 (2019-11)	9.5	Immunity to Radio Frequency, Common Mode	Pass	EN 61000-4-6
2.9	EN 55014-2	5.3	Immunity to Radio Frequency, Common Mode	Pass	IEC 61000-4-6
2.10	ETSI EN 301 489-1:V2.2.3 (2019-11)	9.7	Immunity to Voltage dips and interruptions	Pass	EN 61000-4-11
2.10	EN 55014-2	5.7	Immunity to Voltage dips and interruptions	Pass	IEC 61000-4-11



1.4 Product Information

1.4.1 Technical Description

The Equipment Under Test (EUT) was a Robotic lawnmower, powered by battery. The primary function of the EUT is to mow grass.

LLS Bxy/zC, LLS BLxy/zC, LLS Bxy/zG, LLS BLxy/zG (x=250-600, An integer multiple of 10; y=Null,i,B;z=Y,B,G)

x means: cutting area. 250 stand for 250m²

y means: communication function, i stands for with wifi, B stands for with Bluetooth. Null stands for without communication function.

z means: colour of enclosure, Y: Yardforce, B: Black, G: Green

All models have the same electric construction except for external appearance, only LLS BL300i/YG (with Wi-Fi) , LLS BL300B/YG (with BLE) were performed for all tests. All models are configured with three types of adapters (details in the following table), so two models were tested with three types of adapters.

Adapter 1		Adapter 2		Adapter 3	
Manufacturer	model	Manufacturer	model	Manufacturer	model
SUMEC Hardware&Tools Co.,Ltd.	FY2401500S1	SUMEC Hardware&Tools Co.,Ltd.	FY2401500S2	SUMEC Hardware&Tools Co.,Ltd.	FY2401500S3

1.4.2 EUT Port/Cable Identification

Port	Max Cable Length specified	Usage	Type	Screened
AC Powered Power on				
Line L	--	--	1 core	No
Line N	--	--	1 core	No
Power Line	--	--	2 core	No
DC port Power on				
Negative	9m	--	1 core	No
Positive	9m	--	1 core	No
Power Line	9m	--	2core	No



1.4.3 Test Configuration

Configuration	Description
AC Powered	110V/60Hz, 230V AC 50Hz

1.4.4 Modes of Operation

Mode	Description
Power on(charging mode)	The EUT was charging.
Power on(running mode)	The EUT was running
Switch on/off	The EUT was switch on/off

1.4.5 Monitoring of Performance

The EUT works normally.

1.4.6 performance Criteria:

Performance Criteria from EN 301 489-1: V2.2.3 (2019-11)

The Requirement of Performance Criteria		
1	Performance criteria for continuous phenomena applied to transmitters(CT)	Criteria A of the applicable class shall apply
2	Performance criteria for transient phenomena applied to transmitters(TT)	Criteria B of the applicable class shall apply
3	Performance criteria for continuous phenomena applied to receivers(CR)	Criteria A of the applicable class shall apply
4	Performance criteria for transient phenomena applied to receivers(TR)	Criteria B of the applicable class shall apply

Functional tests before, during and after the immunity tests were performed in order to verify compliance with the Performance criterion in section 6 of ETSI EN 301 489-3.

Performance criteria A

During immunity tests, the test object shall operate as intended with no loss of function, and no unintentional transmissions.

After each test case the test object shall operate as intended, with no loss of function, no degradation of performance, no loss of stored data or user programmable functions.

Performance criteria B

During immunity tests, the test object may be loss of function (one or more) and degradation of performance, with no unintentional transmissions.

After each test case the test object shall operate as intended, lost function(s) shall be self-recoverable, with no degradation of performance, no loss of stored data or user programmable functions.

Performance Criteria from EN 55014-2: 2015

Performance criterion A: The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonable expect from the apparatus if used as intended.

Performance criterion B: The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however no change of actual operating state or stored data is allowed to persist after test. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonable expect from the apparatus if used as intended.

Performance criterion C: Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instruction for use.

1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.



1.6 Test Location

TÜV SÜD Product Service conducted the following tests at TÜV SÜD Certification and Testing (China) Co., Ltd.

Address:

No. 10 Huaxia Road (M)
 Dongting
 Wuxi
 Jiangsu Province
 214100
 China

Test Name	Name of Engineer(s)
AC Powered Power on(charging mode/running mode)	
Conducted Disturbance at Mains Terminals	Shuaiqi Zhou
Radiated Emissions	Jie Wu, Xiaoyang Chen
Harmonics Currents Emissions	Jiaying Wu
Voltage fluctuations & flicker	Jiaying Wu
Electrostatic discharge immunity test	Jie Wu
Electrical fast transient /burst immunity test	Kai Shang
Immunity to conducted disturbances, induced by radio-frequency fields	Kai Shang
Radiated, radio-frequency, electromagnetic field immunity test	Jie Wu
Surge immunity test	Kai Shang
Voltage dips, short interruptions and voltage variations immunity tests	Kai Shang

2 Test Details

2.1 Radiated Emissions (Enclosure Port)

2.1.1 Specification Reference

ETSI EN 301 489-1: V2.2.3 (2019-11), Clause 8.
EN 55014-1:2017 Clause 4.3, 4.5

2.1.2 Equipment Under Test

LLS BL300i/YG (Remark: EUT with Wi-Fi) , LLS BL300B/YG (Remark: EUT with BLE)


2.1.3 Date of Test


22/10/2021-14/11/2021

2.1.4 Test Method

The EUT was set up in a semi-anechoic chamber on a remotely controlled turntable and placed on a non-conductive table 0.8m above a reference ground plane

A prescan of the EUT emissions profile was made while varying the antenna-to-EUT azimuth and antenna-to-EUT polarization using a peak (average) detector; measurements were taken at a 10m (3m) distance. Using the prescan list of the highest emissions detected, their bearing and associated antenna polarization, the EUT was then formally measured using a Quasi-Peak detector. The readings were maximized by adjusting the antenna height, polarization and turntable azimuth, in accordance with the specification.

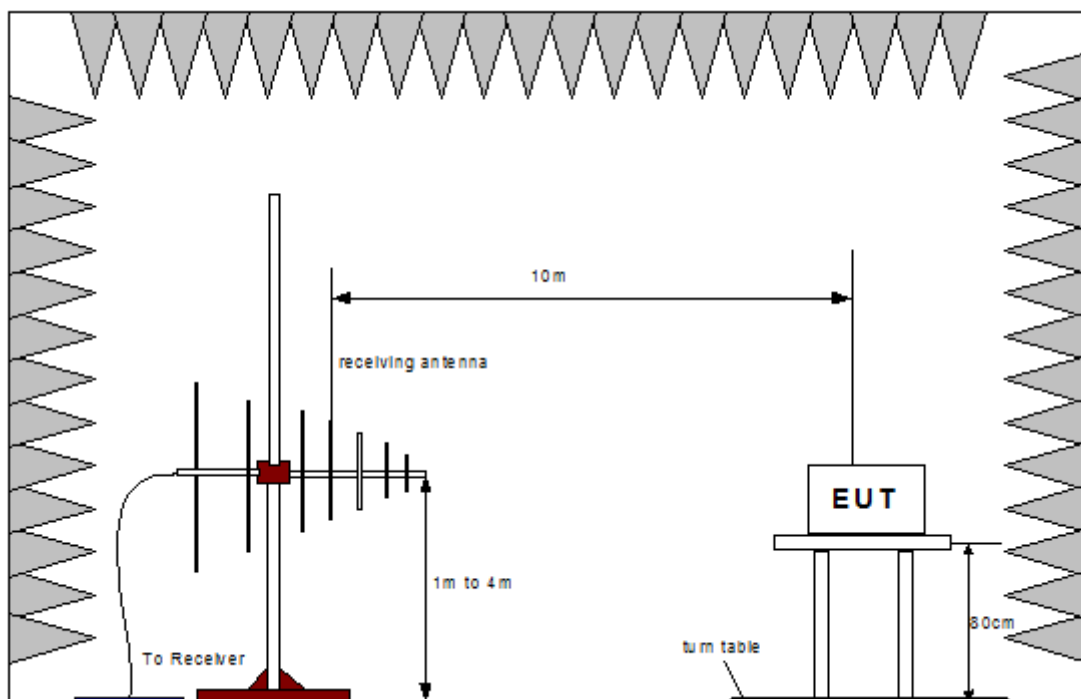

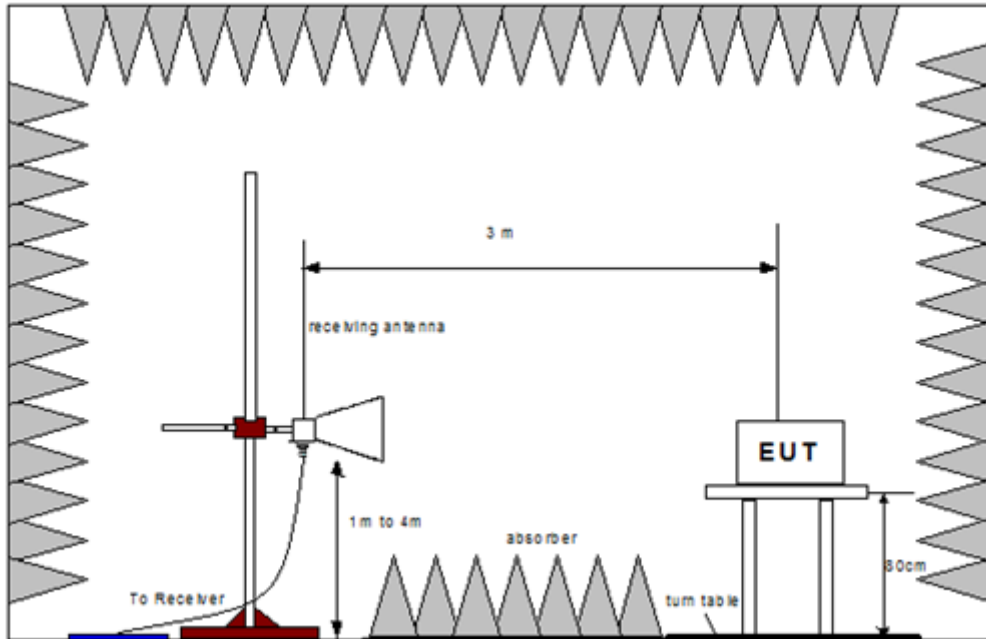

2.1.5 Environmental Conditions

Ambient Temperature 20.0 °C
 Relative Humidity 42.0 %
 Atmospheric Pressure 1021.0 mbar

2.1.6 Specification Limits

Radiated disturbance limits in the frequency range 30MHz to 1000MHz at a measuring distance of 10 m	
Frequency range MHz	Quasi-peak limits dB(µV/m)
30 to 230	30
230 to 1000	37

Required Specification Limits (Class B @ 3m)		
Frequency Range (MHz)	Average (dBµV/m)	Peak (dBµV/m)
1000 to 3000	50	70
3000 to 6000	54	74




2.1.7 Test Results

Results for Configuration and Mode: Powered/ Power on (charging mode & running mode).

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

For adaptor: adapter 1_FY2401500S1, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,230V~/50Hz)

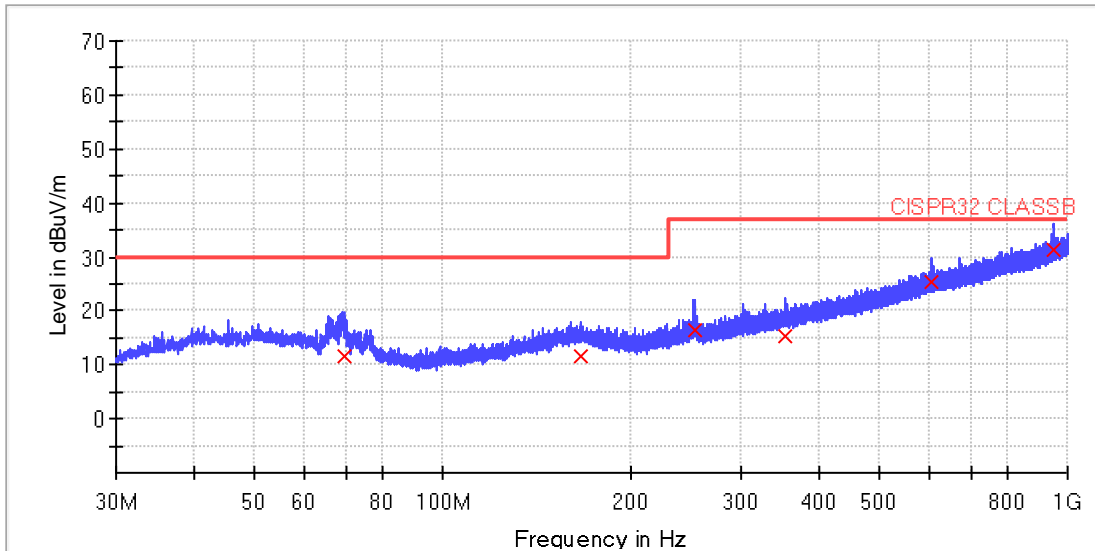


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - QPK (dB)	Limit - QPK (dBuV/)
69.360000	11.4	1000.0	120.000	365.0	H	18.6	30.0
165.840000	11.6	1000.0	120.000	365.0	H	18.4	30.0
253.080000	16.3	1000.0	120.000	365.0	H	20.7	37.0
354.320000	15.5	1000.0	120.000	365.0	H	21.6	37.0
607.400000	25.4	1000.0	120.000	365.0	H	11.6	37.0
948.680000	31.2	1000.0	120.000	365.0	H	5.8	37.0

For adaptor: adapter 1_FY2401500S1, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,230V~/50Hz)

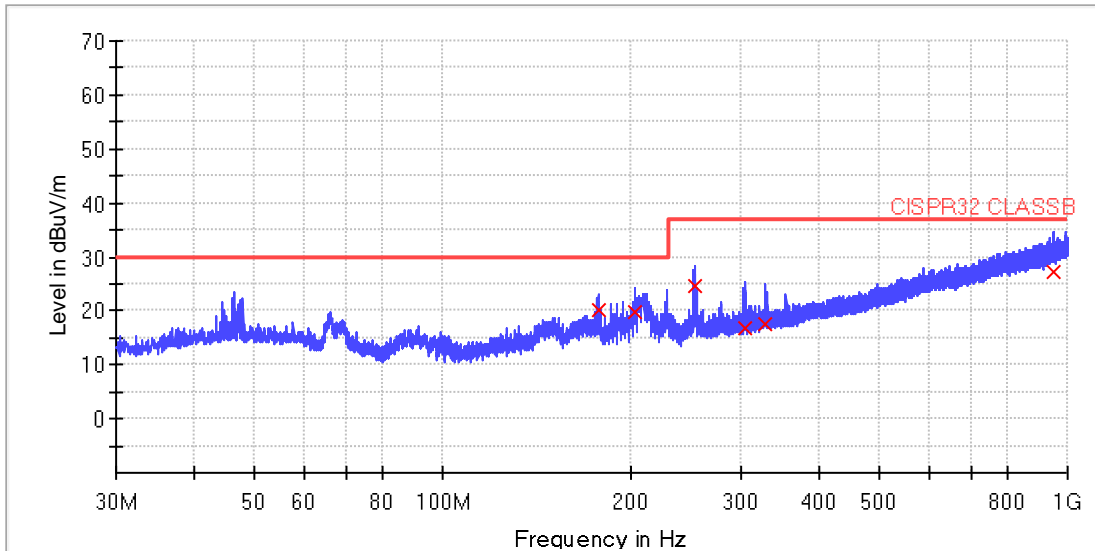


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - QPK (dB)	Limit - QPK (dBuV/)
177.200000	20.1	1000.0	120.000	155.0	V	9.9	30.0
203.280000	19.8	1000.0	120.000	155.0	V	10.3	30.0
253.120000	24.4	1000.0	120.000	155.0	V	12.6	37.0
303.800000	16.8	1000.0	120.000	155.0	V	20.2	37.0
329.040000	17.5	1000.0	120.000	155.0	V	19.5	37.0
951.240000	27.3	1000.0	120.000	155.0	V	9.7	37.0

For adaptor: adapter 1_FY2401500S1, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,110V~/60Hz)

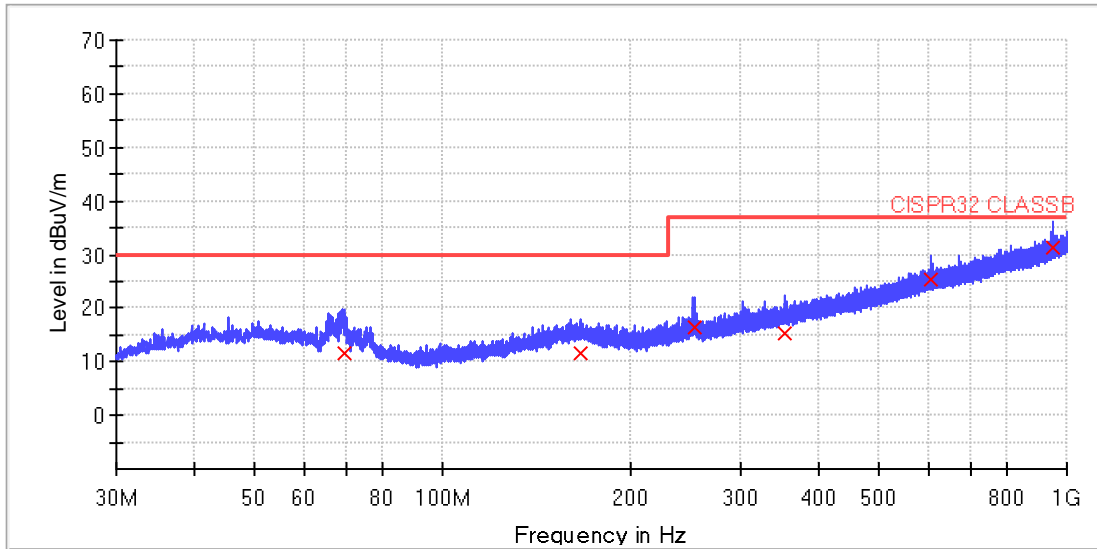


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	PoI	Margin - QPK (dB)	Limit - QPK (dBuV/)
69.360000	11.4	1000.0	120.000	365.0	H	18.6	30.0
165.840000	11.6	1000.0	120.000	365.0	H	18.4	30.0
253.080000	16.3	1000.0	120.000	365.0	H	20.7	37.0
354.320000	15.5	1000.0	120.000	365.0	H	21.6	37.0
607.400000	25.4	1000.0	120.000	365.0	H	11.6	37.0
948.680000	31.2	1000.0	120.000	365.0	H	5.8	37.0

For adaptor: adapter 1_FY2401500S1, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,110V~/60Hz)

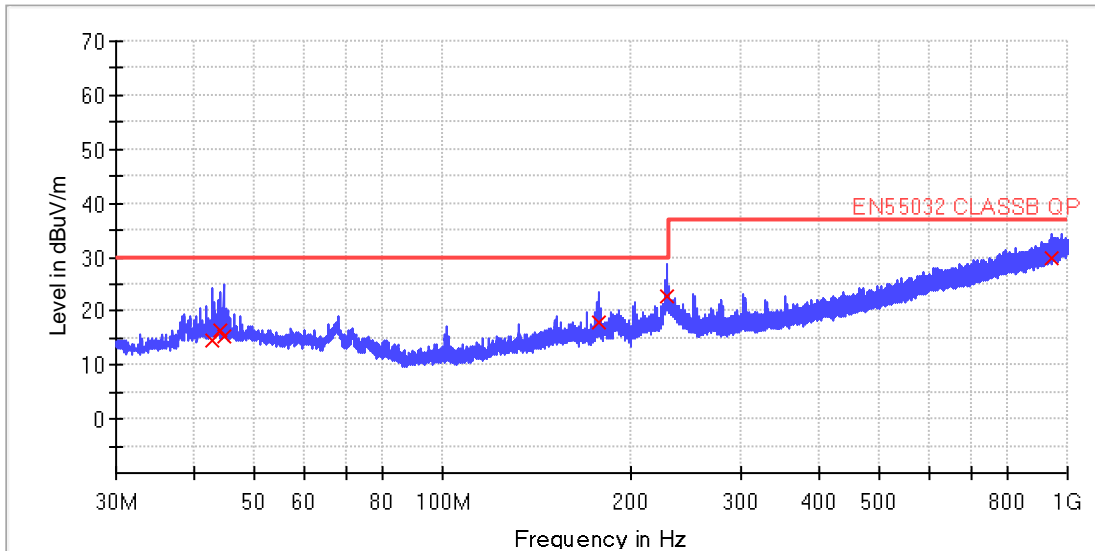


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - QPK (dB)	Limit - QPK (dBuV/m)
42.760000	14.6	1000.0	120.000	155.0	V	15.4	30.0
44.000000	16.3	1000.0	120.000	155.0	V	13.7	30.0
44.560000	15.2	1000.0	120.000	155.0	V	14.8	30.0
177.160000	18.1	1000.0	120.000	155.0	V	11.9	30.0
227.760000	22.7	1000.0	120.000	155.0	V	7.3	30.0
944.800000	29.7	1000.0	120.000	155.0	V	7.4	37.0

For adaptor: adapter 1_FY2401500S1, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,230V~/50Hz)

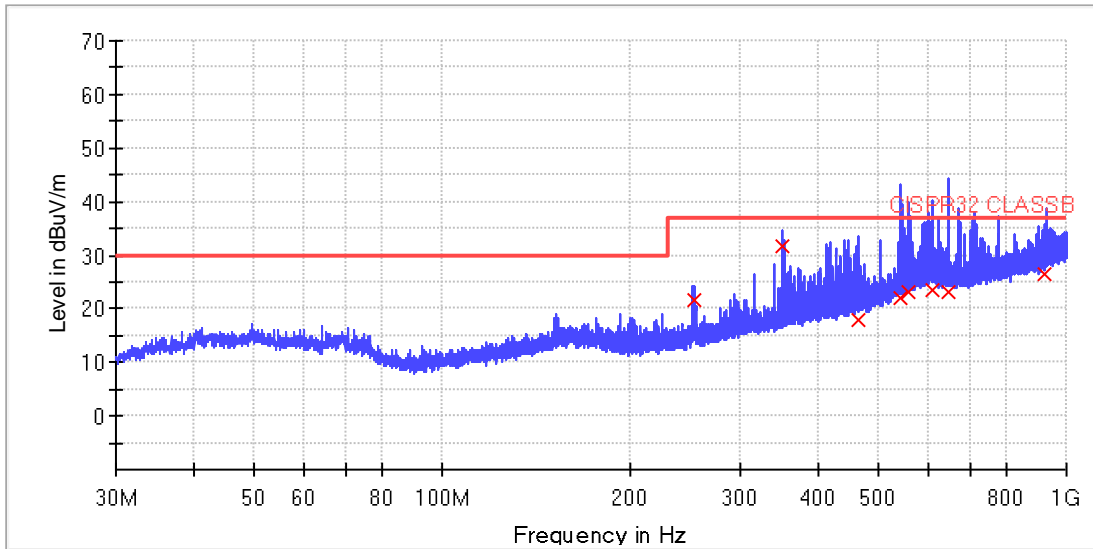


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - QPK (dB)	Limit - QPK (dBuV/)
253.080000	21.5	1000.0	120.000	385.0	H	15.5	37.0
351.280000	31.8	1000.0	120.000	385.0	H	5.2	37.0
463.440000	17.8	1000.0	120.000	385.0	H	19.2	37.0
541.320000	22.0	1000.0	120.000	385.0	H	15.0	37.0
558.560000	23.0	1000.0	120.000	385.0	H	14.0	37.0
607.760000	23.7	1000.0	120.000	385.0	H	13.3	37.0
646.240000	23.2	1000.0	120.000	385.0	H	13.8	37.0
920.960000	26.6	1000.0	120.000	385.0	H	10.4	37.0

For adaptor: adapter 1_FY2401500S1, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,230V~/50Hz)

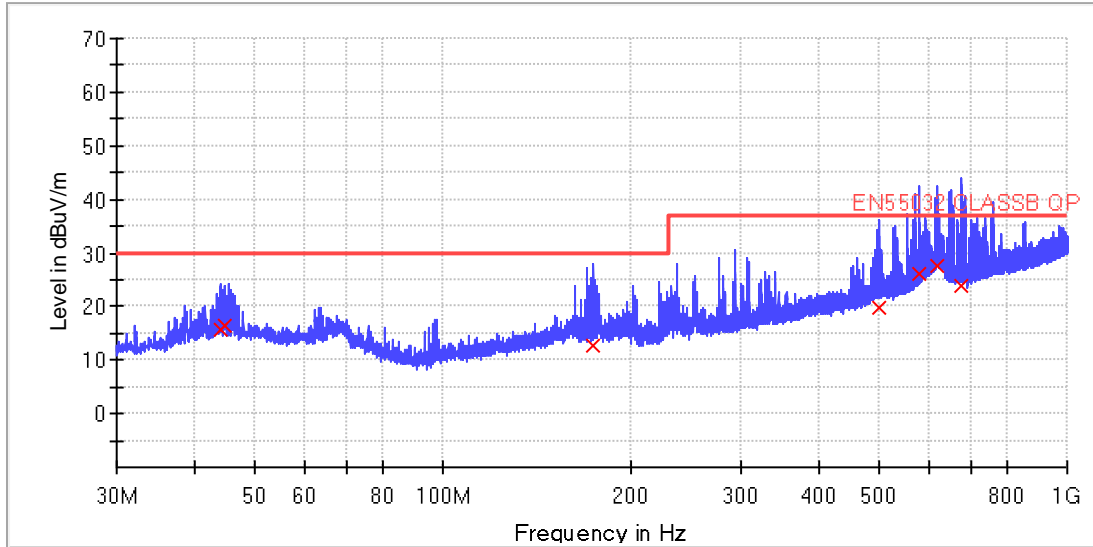


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - QPK (dB)	Limit - QPK (dBuV/m)
43.880000	15.7	1000.0	120.000	155.0	V	14.3	30.0
44.600000	16.5	1000.0	120.000	155.0	V	13.5	30.0
174.480000	12.8	1000.0	120.000	155.0	V	17.2	30.0
500.800000	19.7	1000.0	120.000	155.0	V	17.3	37.0
580.760000	25.9	1000.0	120.000	155.0	V	11.1	37.0
616.960000	27.4	1000.0	120.000	155.0	V	9.6	37.0
678.200000	24.0	1000.0	120.000	155.0	V	13.0	37.0

For adaptor: adapter 1_FY2401500S1, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,110V~/60Hz)

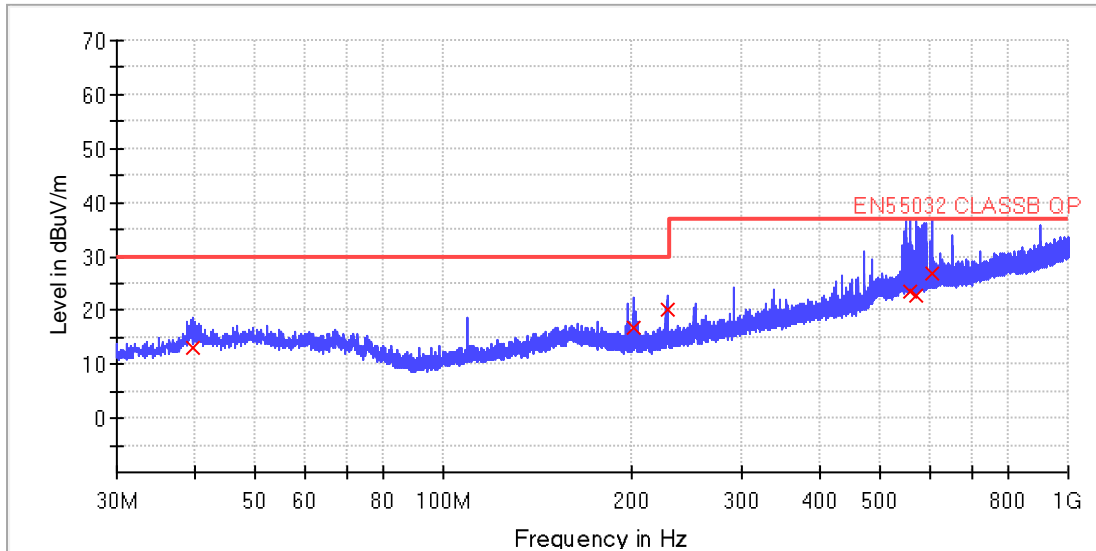


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - QPK (dB)	Limit - QPK (dBuV/m)
39.680000	13.0	1000.0	120.000	385.0	H	17.0	30.0
201.760000	16.9	1000.0	120.000	385.0	H	13.1	30.0
227.840000	20.2	1000.0	120.000	385.0	H	9.8	30.0
559.560000	23.4	1000.0	120.000	385.0	H	13.6	37.0
571.800000	22.9	1000.0	120.000	385.0	H	14.1	37.0
605.560000	26.8	1000.0	120.000	385.0	H	10.2	37.0

For adaptor: adapter 1_FY2401500S1, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,110V~/60Hz)

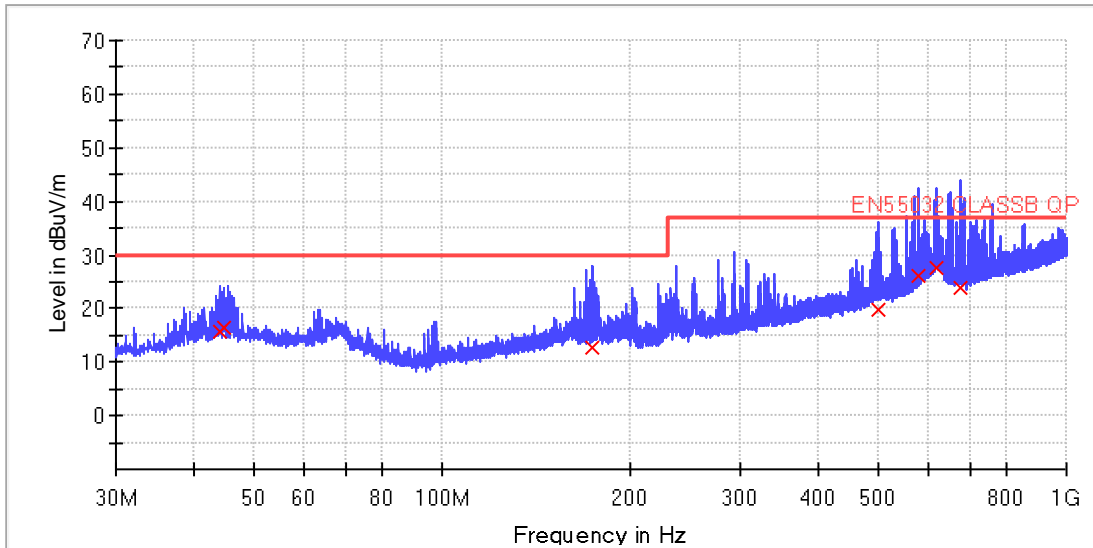


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - QPK (dB)	Limit - QPK (dBuV/m)
43.880000	15.7	1000.0	120.000	155.0	V	14.3	30.0
44.600000	16.5	1000.0	120.000	155.0	V	13.5	30.0
174.480000	12.8	1000.0	120.000	155.0	V	17.2	30.0
500.800000	19.7	1000.0	120.000	155.0	V	17.3	37.0
580.760000	25.9	1000.0	120.000	155.0	V	11.1	37.0
616.960000	27.4	1000.0	120.000	155.0	V	9.6	37.0
678.200000	24.0	1000.0	120.000	155.0	V	13.0	37.0

For adaptor: adapter 2_ FY2401500S2, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,230V~/50Hz)

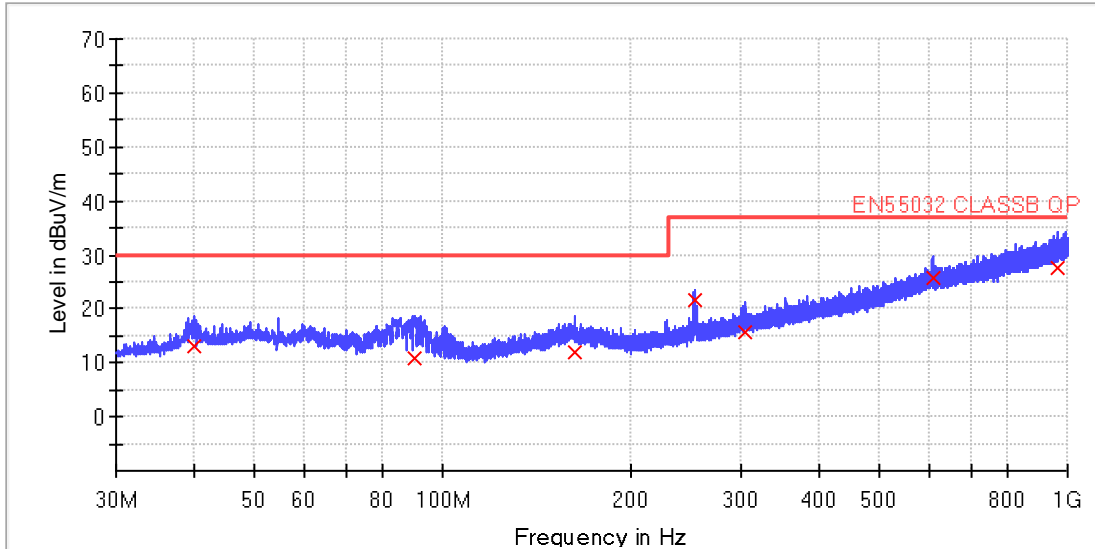


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
40.000000	13.0	1000.0	120.000	155.0	H	-1.0	17.0	30.0
90.400000	10.9	1000.0	120.000	155.0	H	-1.0	19.1	30.0
162.320000	11.9	1000.0	120.000	155.0	H	-1.0	18.1	30.0
253.160000	21.6	1000.0	120.000	155.0	H	-1.0	15.5	37.0
304.600000	15.6	1000.0	120.000	155.0	H	-1.0	21.4	37.0
607.600000	25.8	1000.0	120.000	155.0	H	-1.0	11.2	37.0
965.800000	27.8	1000.0	120.000	155.0	H	-1.0	9.3	37.0

For adaptor: adapter 2_ FY2401500S2, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,230V~/50Hz)

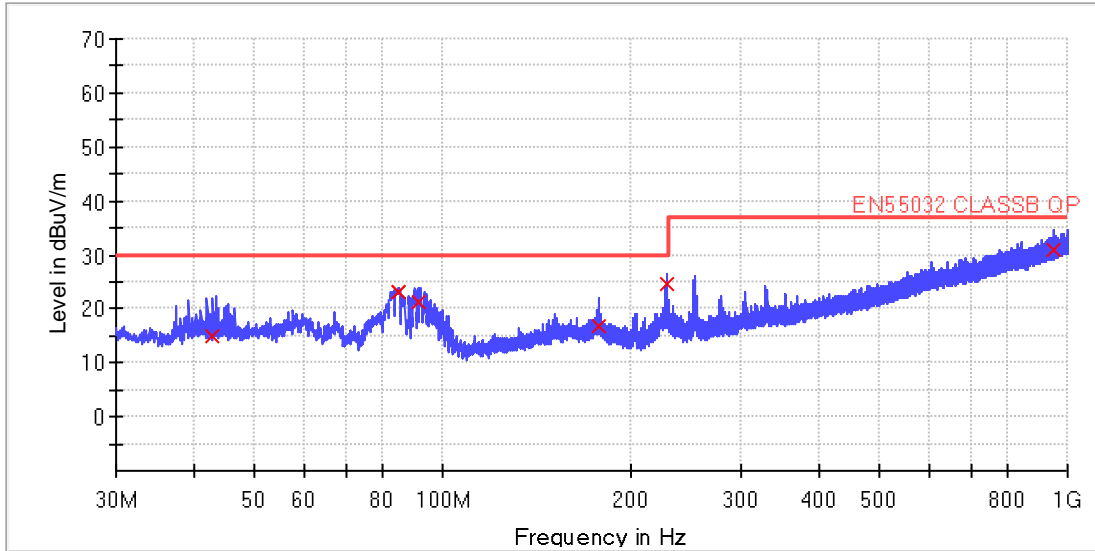


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
42.880000	14.8	1000.0	120.000	155.0	V	-1.0	15.2	30.0
84.680000	23.1	1000.0	120.000	155.0	V	-1.0	6.9	30.0
91.680000	21.1	1000.0	120.000	155.0	V	-1.0	8.9	30.0
177.200000	16.7	1000.0	120.000	155.0	V	-1.0	13.3	30.0
227.800000	24.7	1000.0	120.000	155.0	V	-1.0	5.3	30.0
948.600000	30.9	1000.0	120.000	155.0	V	-1.0	6.1	37.0

For adaptor: adapter 2_ FY2401500S2, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,110V~/60Hz)

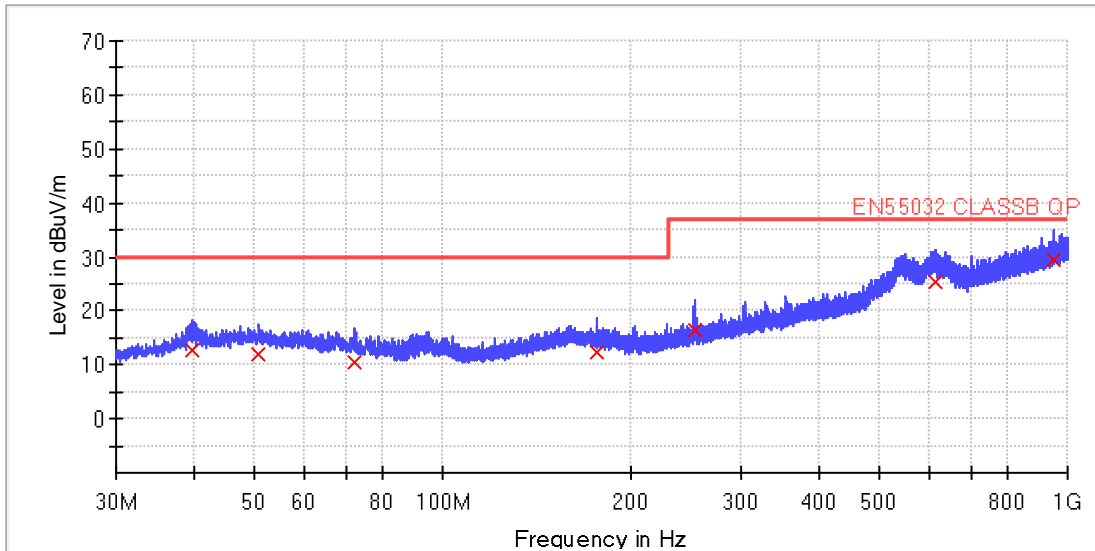


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
39.800000	12.8	1000.0	120.000	155.0	H	-1.0	17.2	30.0
50.840000	11.8	1000.0	120.000	155.0	H	-1.0	18.2	30.0
72.200000	10.5	1000.0	120.000	155.0	H	-1.0	19.5	30.0
176.440000	12.5	1000.0	120.000	155.0	H	-1.0	17.5	30.0
253.160000	16.4	1000.0	120.000	155.0	H	-1.0	20.6	37.0
614.960000	25.2	1000.0	120.000	155.0	H	-1.0	11.8	37.0
948.520000	29.6	1000.0	120.000	155.0	H	-1.0	7.4	37.0

For adaptor: adapter 2_ FY2401500S2, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,110V~/60Hz)

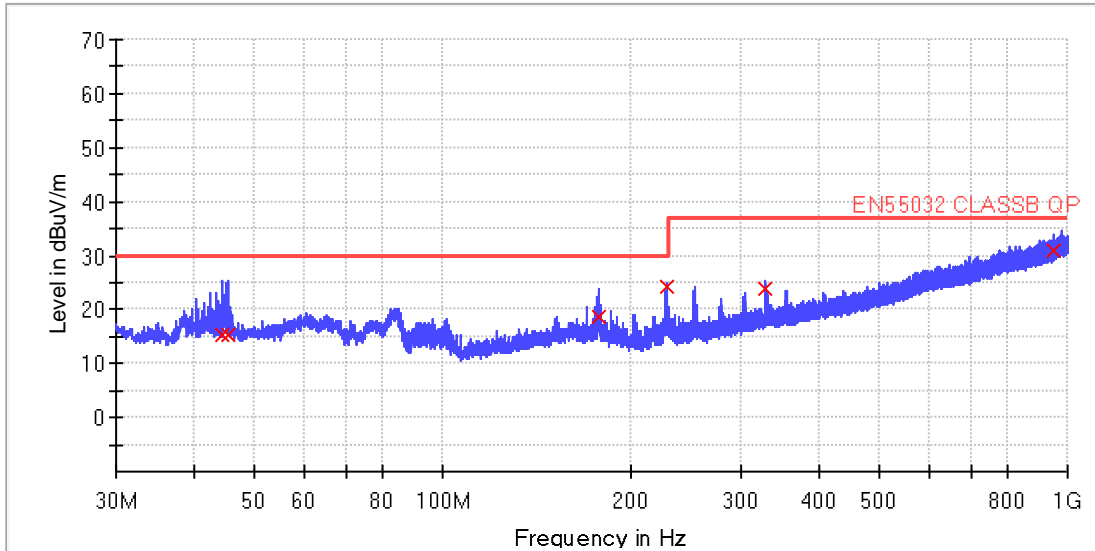


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
44.320000	15.2	1000.0	120.000	155.0	V	-1.0	14.8	30.0
45.240000	15.5	1000.0	120.000	155.0	V	-1.0	14.5	30.0
178.000000	18.8	1000.0	120.000	155.0	V	-1.0	11.2	30.0
227.800000	24.1	1000.0	120.000	155.0	V	-1.0	5.9	30.0
329.080000	23.9	1000.0	120.000	155.0	V	-1.0	13.1	37.0
948.600000	31.0	1000.0	120.000	155.0	V	-1.0	6.0	37.0

For adaptor: adapter 2_ FY2401500S2, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,230V~/50Hz)

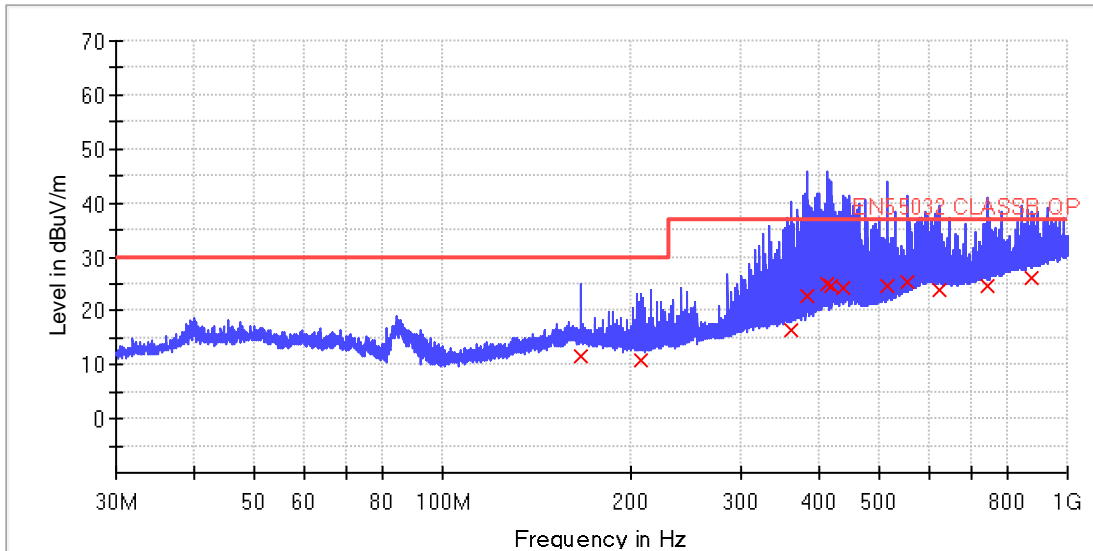


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
165.960000	11.5	1000.0	120.000	155.0	H	-1.0	18.5	30.0
207.840000	10.8	1000.0	120.000	155.0	H	-1.0	19.2	30.0
360.240000	16.4	1000.0	120.000	155.0	H	-1.0	20.7	37.0
384.160000	22.9	1000.0	120.000	155.0	H	-1.0	14.2	37.0
413.160000	25.2	1000.0	120.000	155.0	H	-1.0	11.9	37.0
418.640000	24.5	1000.0	120.000	155.0	H	-1.0	12.5	37.0
436.080000	24.3	1000.0	120.000	155.0	H	-1.0	12.7	37.0
514.960000	24.8	1000.0	120.000	155.0	H	-1.0	12.2	37.0
553.400000	25.4	1000.0	120.000	155.0	H	-1.0	11.6	37.0
621.800000	23.9	1000.0	120.000	155.0	H	-1.0	13.1	37.0
742.920000	24.6	1000.0	120.000	155.0	H	-1.0	12.5	37.0
876.800000	26.2	1000.0	120.000	155.0	H	-1.0	10.8	37.0

For adaptor: adapter 2_ FY2401500S2, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,230V~/50Hz)

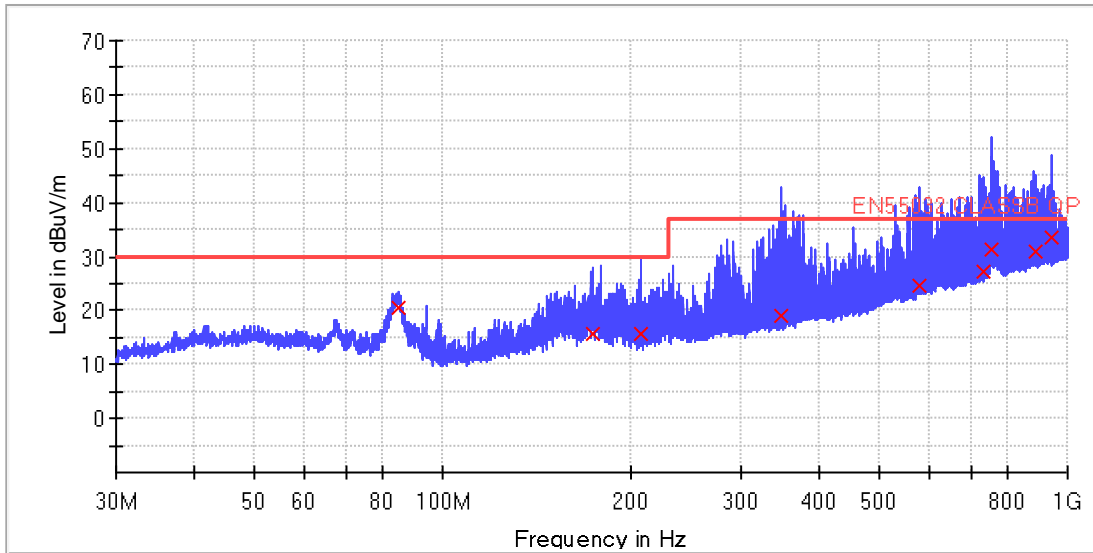


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
84.840000	20.5	1000.0	120.000	155.0	V	-1.0	9.5	30.0
173.800000	15.6	1000.0	120.000	155.0	V	-1.0	14.4	30.0
206.920000	15.7	1000.0	120.000	155.0	V	-1.0	14.3	30.0
348.680000	19.1	1000.0	120.000	155.0	V	-1.0	17.9	37.0
581.160000	24.7	1000.0	120.000	155.0	V	-1.0	12.3	37.0
732.040000	27.4	1000.0	120.000	155.0	V	-1.0	9.7	37.0
753.680000	31.2	1000.0	120.000	155.0	V	-1.0	5.8	37.0
886.000000	30.9	1000.0	120.000	155.0	V	-1.0	6.1	37.0
940.640000	33.5	1000.0	120.000	155.0	V	-1.0	3.6	37.0

For adaptor: adapter 2_ FY2401500S2, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,110V~/60Hz)

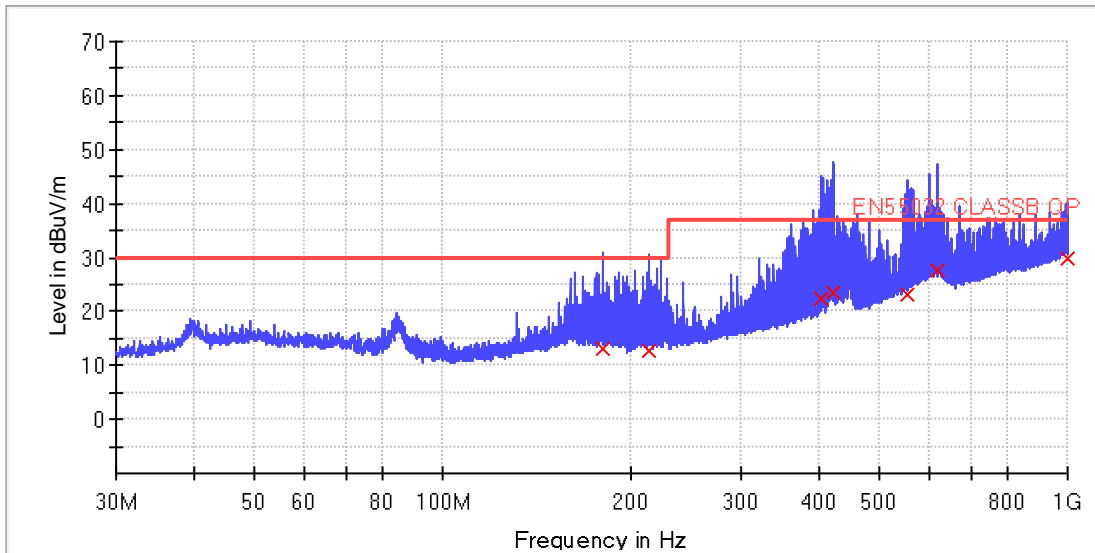


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
180.040000	13.1	1000.0	120.000	155.0	H	-1.0	17.0	30.0
213.640000	12.9	1000.0	120.000	155.0	H	-1.0	17.1	30.0
404.160000	22.5	1000.0	120.000	155.0	H	-1.0	14.5	37.0
421.920000	23.6	1000.0	120.000	155.0	H	-1.0	13.4	37.0
552.320000	23.1	1000.0	120.000	155.0	H	-1.0	14.0	37.0
617.440000	27.6	1000.0	120.000	155.0	H	-1.0	9.4	37.0
999.360000	29.8	1000.0	120.000	155.0	H	-1.0	7.2	37.0

For adaptor: adapter 2_ FY2401500S2, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,110V~/60Hz)

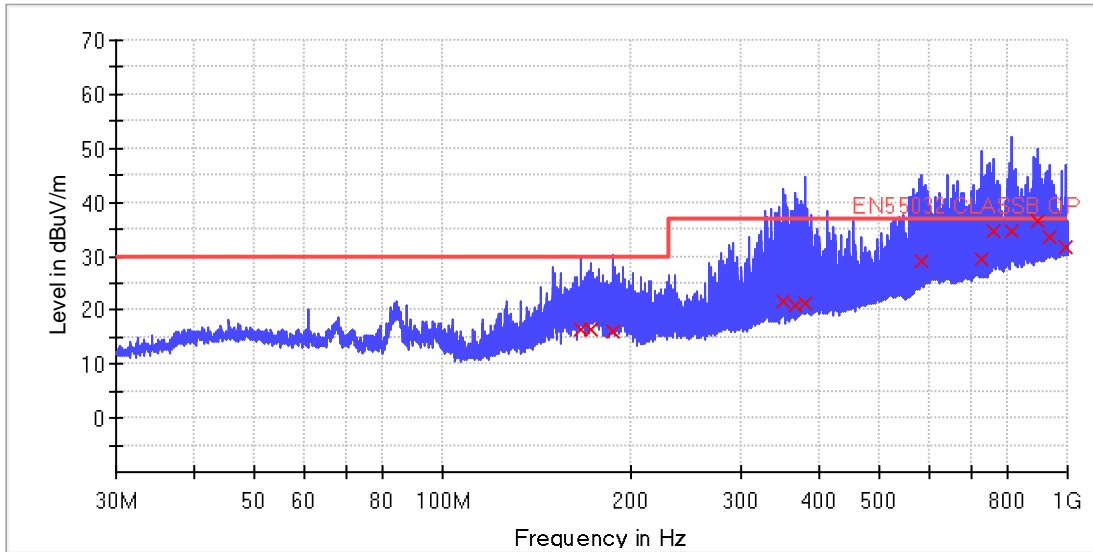


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
166.600000	16.5	1000.0	120.000	155.0	V	-1.0	13.5	30.0
172.880000	16.3	1000.0	120.000	155.0	V	-1.0	13.7	30.0
186.760000	16.0	1000.0	120.000	155.0	V	-1.0	14.0	30.0
349.960000	21.6	1000.0	120.000	155.0	V	-1.0	15.4	37.0
365.720000	20.9	1000.0	120.000	155.0	V	-1.0	16.1	37.0
379.360000	21.1	1000.0	120.000	155.0	V	-1.0	15.9	37.0
582.640000	29.0	1000.0	120.000	155.0	V	-1.0	8.0	37.0
725.960000	29.3	1000.0	120.000	155.0	V	-1.0	7.7	37.0
760.360000	34.6	1000.0	120.000	155.0	V	-1.0	2.4	37.0
814.640000	34.7	1000.0	120.000	155.0	V	-1.0	2.3	37.0
894.720000	36.5	1000.0	120.000	155.0	V	-1.0	0.5	37.0
933.720000	33.4	1000.0	120.000	155.0	V	-1.0	3.6	37.0
990.760000	31.8	1000.0	120.000	155.0	V	-1.0	5.2	37.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,230V~/50Hz)

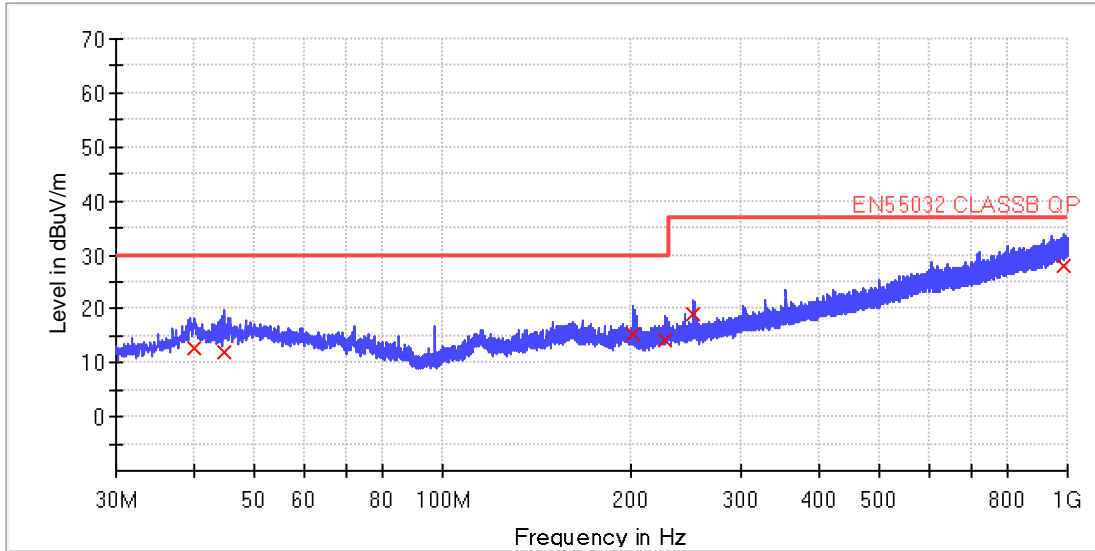


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
40.120000	12.6	1000.0	120.000	155.0	H	-1.0	17.4	30.0
44.720000	11.9	1000.0	120.000	155.0	H	-1.0	18.1	30.0
201.680000	15.4	1000.0	120.000	155.0	H	-1.0	14.6	30.0
227.000000	14.3	1000.0	120.000	155.0	H	-1.0	15.7	30.0
252.360000	18.9	1000.0	120.000	155.0	H	-1.0	18.1	37.0
984.080000	28.1	1000.0	120.000	155.0	H	-1.0	8.9	37.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,230V~/50Hz)

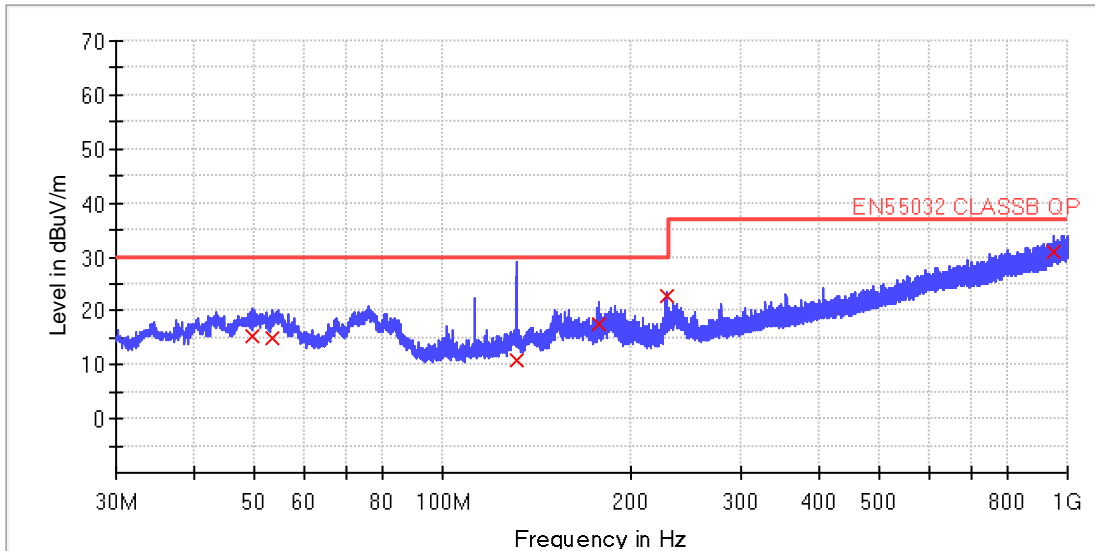


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
49.400000	15.3	1000.0	120.000	155.0	V	-1.0	14.7	30.0
53.360000	14.9	1000.0	120.000	155.0	V	-1.0	15.1	30.0
131.440000	11.0	1000.0	120.000	155.0	V	-1.0	19.0	30.0
177.160000	17.6	1000.0	120.000	155.0	V	-1.0	12.4	30.0
227.840000	22.8	1000.0	120.000	155.0	V	-1.0	7.3	30.0
948.600000	31.0	1000.0	120.000	155.0	V	-1.0	6.0	37.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,110V~/60Hz)

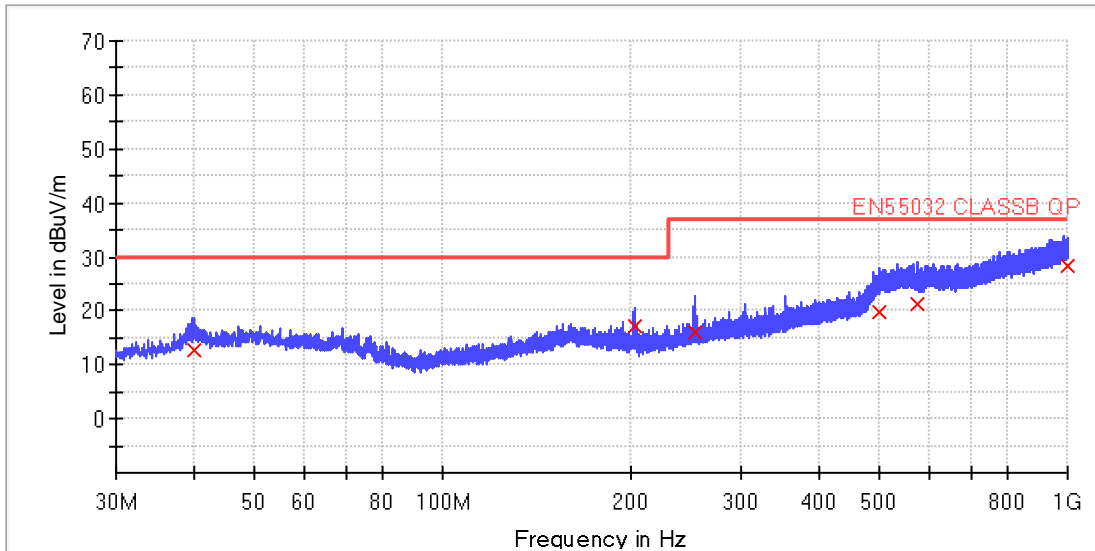


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
40.040000	12.8	1000.0	120.000	155.0	H	-1.0	17.3	30.0
202.520000	17.2	1000.0	120.000	155.0	H	-1.0	12.8	30.0
253.120000	16.1	1000.0	120.000	155.0	H	-1.0	20.9	37.0
501.240000	19.7	1000.0	120.000	155.0	H	-1.0	17.3	37.0
573.080000	21.3	1000.0	120.000	155.0	H	-1.0	15.8	37.0
997.600000	28.5	1000.0	120.000	155.0	H	-1.0	8.6	37.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,110V~/60Hz)

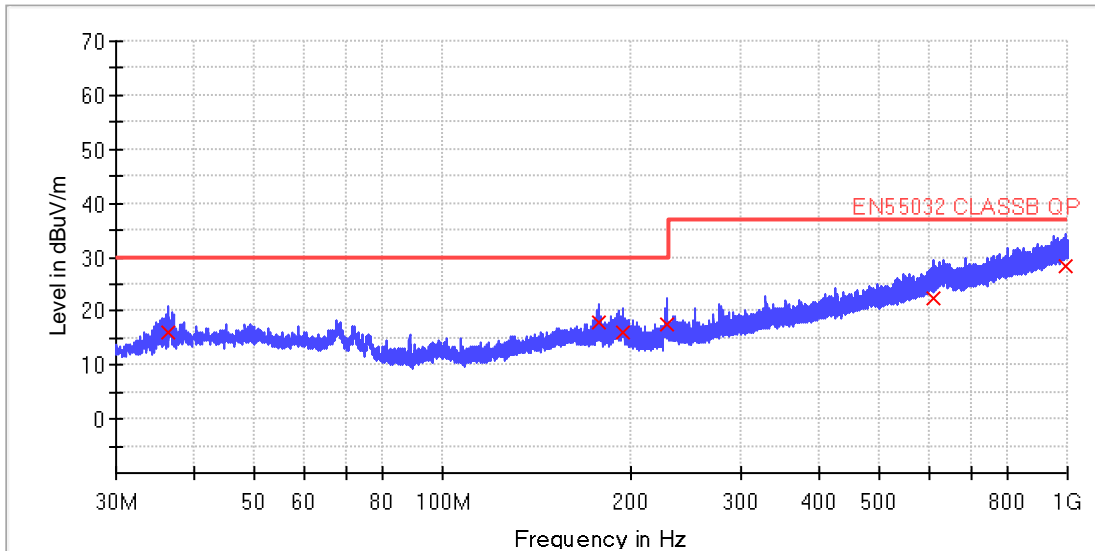


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
36.280000	16.2	1000.0	120.000	155.0	V	-1.0	13.8	30.0
177.240000	17.8	1000.0	120.000	155.0	V	-1.0	12.2	30.0
193.840000	16.0	1000.0	120.000	155.0	V	-1.0	14.0	30.0
227.880000	17.5	1000.0	120.000	155.0	V	-1.0	12.5	30.0
611.200000	22.4	1000.0	120.000	155.0	V	-1.0	14.6	37.0
995.560000	28.4	1000.0	120.000	155.0	V	-1.0	8.6	37.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,230V~/50Hz)

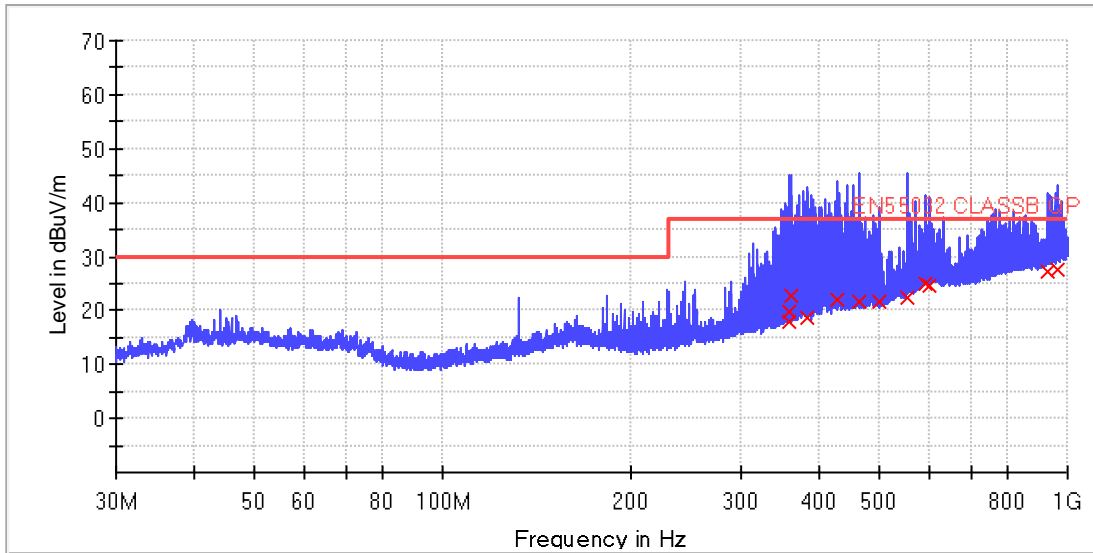


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
359.200000	19.9	1000.0	120.000	155.0	H	-1.0	17.1	37.0
360.720000	22.9	1000.0	120.000	155.0	H	-1.0	14.1	37.0
383.640000	18.7	1000.0	120.000	155.0	H	-1.0	18.3	37.0
429.360000	22.1	1000.0	120.000	155.0	H	-1.0	14.9	37.0
464.160000	21.7	1000.0	120.000	155.0	H	-1.0	15.3	37.0
498.720000	21.8	1000.0	120.000	155.0	H	-1.0	15.2	37.0
554.560000	22.2	1000.0	120.000	155.0	H	-1.0	14.8	37.0
592.880000	25.1	1000.0	120.000	155.0	H	-1.0	11.9	37.0
599.960000	24.7	1000.0	120.000	155.0	H	-1.0	12.3	37.0
930.800000	27.1	1000.0	120.000	155.0	H	-1.0	9.9	37.0
964.680000	27.8	1000.0	120.000	155.0	H	-1.0	9.2	37.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,230V~/50Hz)

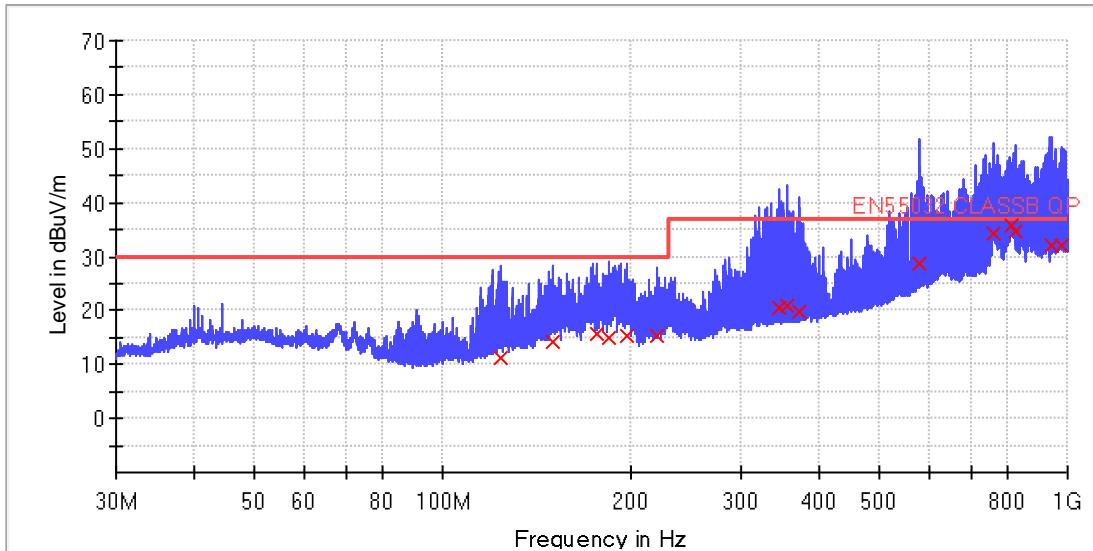


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
124.240000	11.4	1000.0	120.000	155.0	V	-1.0	18.6	30.0
149.800000	14.0	1000.0	120.000	155.0	V	-1.0	16.0	30.0
177.000000	15.5	1000.0	120.000	155.0	V	-1.0	14.5	30.0
184.560000	15.0	1000.0	120.000	155.0	V	-1.0	15.0	30.0
196.880000	15.2	1000.0	120.000	155.0	V	-1.0	14.8	30.0
220.680000	15.4	1000.0	120.000	155.0	V	-1.0	14.6	30.0
345.400000	20.4	1000.0	120.000	155.0	V	-1.0	16.6	37.0
355.640000	20.7	1000.0	120.000	155.0	V	-1.0	16.3	37.0
372.400000	19.6	1000.0	120.000	155.0	V	-1.0	17.4	37.0
578.120000	28.8	1000.0	120.000	155.0	V	-1.0	8.2	37.0
762.200000	34.2	1000.0	120.000	155.0	V	-1.0	2.8	37.0
813.880000	35.8	1000.0	120.000	155.0	V	-1.0	1.2	37.0
822.920000	34.8	1000.0	120.000	155.0	V	-1.0	2.2	37.0
939.600000	32.0	1000.0	120.000	155.0	V	-1.0	5.1	37.0
975.960000	32.1	1000.0	120.000	155.0	V	-1.0	4.9	37.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,110V~/60Hz)

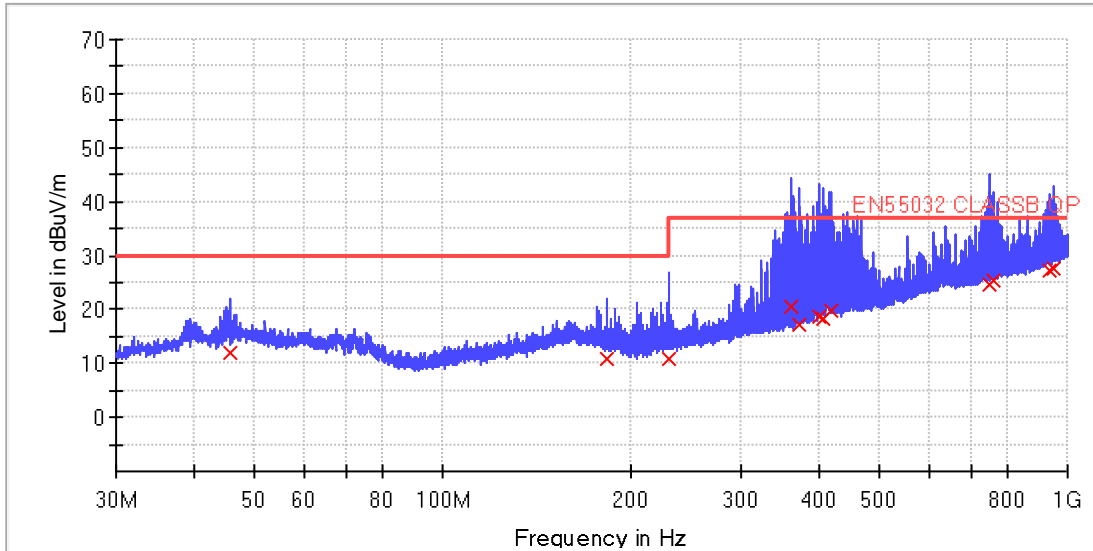


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
45.680000	11.8	1000.0	120.000	155.0	H	-1.0	18.2	30.0
182.480000	10.7	1000.0	120.000	155.0	H	-1.0	19.3	30.0
230.520000	10.9	1000.0	120.000	155.0	H	-1.0	26.1	37.0
360.960000	20.4	1000.0	120.000	155.0	H	-1.0	16.7	37.0
373.200000	17.2	1000.0	120.000	155.0	H	-1.0	19.8	37.0
400.040000	18.7	1000.0	120.000	155.0	H	-1.0	18.3	37.0
405.840000	18.3	1000.0	120.000	155.0	H	-1.0	18.7	37.0
417.400000	19.6	1000.0	120.000	155.0	H	-1.0	17.4	37.0
747.720000	24.5	1000.0	120.000	155.0	H	-1.0	12.5	37.0
759.480000	25.4	1000.0	120.000	155.0	H	-1.0	11.7	37.0
937.160000	27.2	1000.0	120.000	155.0	H	-1.0	9.8	37.0
948.400000	27.6	1000.0	120.000	155.0	H	-1.0	9.5	37.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,110V~/60Hz)

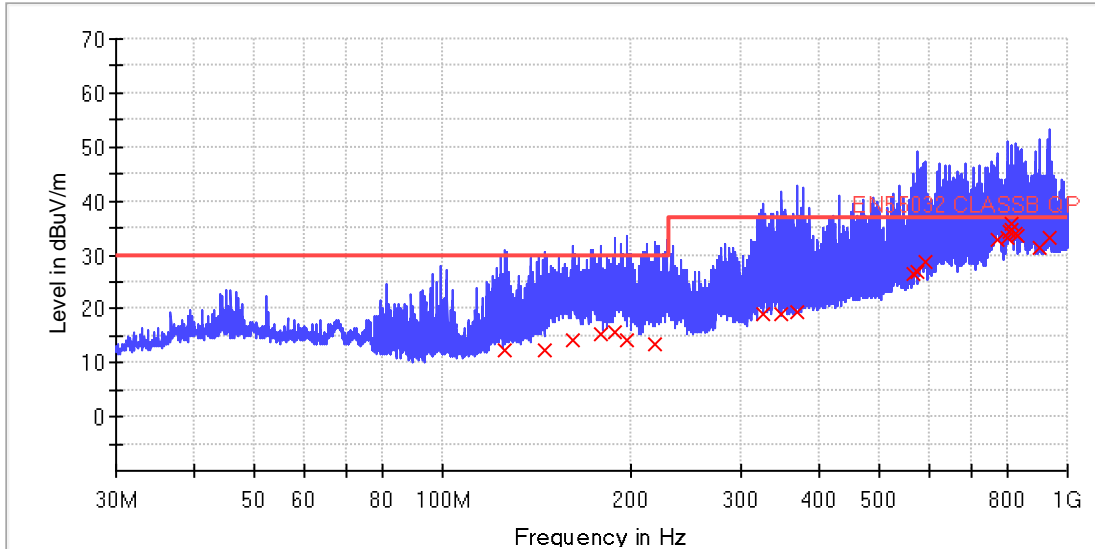


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
126.080000	12.2	1000.0	120.000	155.0	V	-1.0	17.8	30.0
145.800000	12.5	1000.0	120.000	155.0	V	-1.0	17.5	30.0
161.560000	14.4	1000.0	120.000	155.0	V	-1.0	15.6	30.0
179.000000	15.1	1000.0	120.000	155.0	V	-1.0	14.9	30.0
188.120000	15.6	1000.0	120.000	155.0	V	-1.0	14.4	30.0
197.080000	14.2	1000.0	120.000	155.0	V	-1.0	15.8	30.0
218.320000	13.3	1000.0	120.000	155.0	V	-1.0	16.7	30.0
324.560000	19.0	1000.0	120.000	155.0	V	-1.0	18.0	37.0
346.920000	18.9	1000.0	120.000	155.0	V	-1.0	18.1	37.0
368.480000	19.4	1000.0	120.000	155.0	V	-1.0	17.6	37.0
566.080000	26.5	1000.0	120.000	155.0	V	-1.0	10.6	37.0
576.480000	26.9	1000.0	120.000	155.0	V	-1.0	10.1	37.0
592.040000	28.6	1000.0	120.000	155.0	V	-1.0	8.4	37.0
769.520000	32.9	1000.0	120.000	155.0	V	-1.0	4.2	37.0
799.520000	33.2	1000.0	120.000	155.0	V	-1.0	3.8	37.0
805.040000	34.4	1000.0	120.000	155.0	V	-1.0	2.6	37.0
811.720000	34.6	1000.0	120.000	155.0	V	-1.0	2.4	37.0
812.920000	35.8	1000.0	120.000	155.0	V	-1.0	1.2	37.0
823.160000	34.0	1000.0	120.000	155.0	V	-1.0	3.0	37.0
830.200000	33.7	1000.0	120.000	155.0	V	-1.0	3.3	37.0
900.080000	31.5	1000.0	120.000	155.0	V	-1.0	5.6	37.0
936.280000	33.0	1000.0	120.000	155.0	V	-1.0	4.0	37.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,230V~/50Hz)

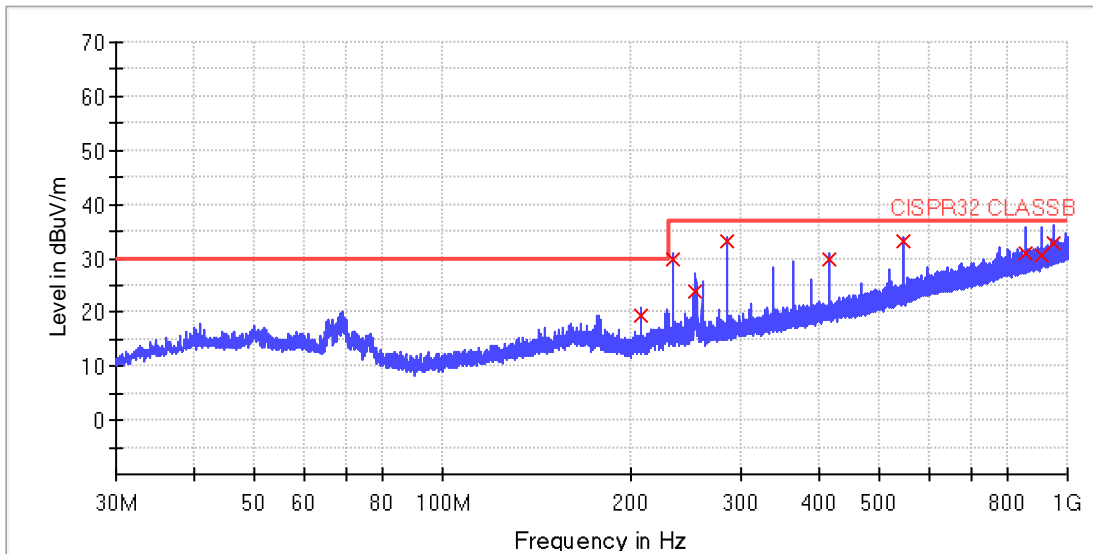


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - QPK (dB)	Limit - QPK (dBuV/)
208.000000	19.3	1000.0	120.000	385.0	H	10.7	30.0
234.000000	29.7	1000.0	120.000	155.0	H	7.3	37.0
253.480000	23.8	1000.0	120.000	155.0	H	13.2	37.0
286.000000	33.3	1000.0	120.000	155.0	H	3.7	37.0
416.000000	30.0	1000.0	120.000	155.0	H	7.0	37.0
546.000000	33.0	1000.0	120.000	155.0	H	4.0	37.0
858.000000	31.0	1000.0	120.000	155.0	H	6.1	37.0
910.000000	30.5	1000.0	120.000	155.0	H	6.5	37.0
948.600000	32.9	1000.0	120.000	155.0	H	4.1	37.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,230V~/50Hz)

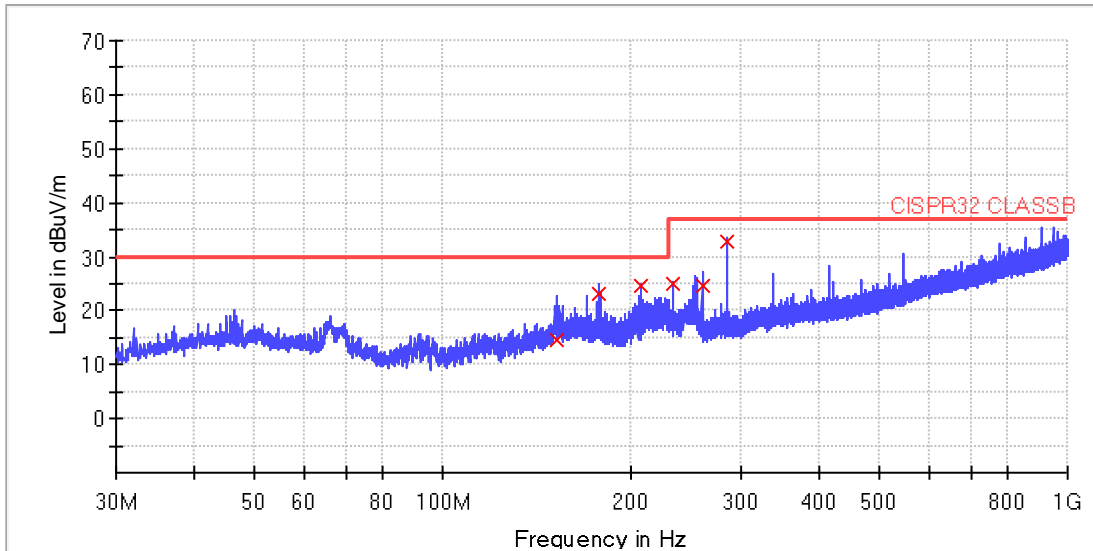


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - QPK (dB)	Limit - QPK (dBuV/)
152.280000	14.7	1000.0	120.000	155.0	V	15.3	30.0
177.600000	23.0	1000.0	120.000	155.0	V	7.0	30.0
208.000000	24.5	1000.0	120.000	155.0	V	5.5	30.0
234.000000	24.9	1000.0	120.000	155.0	V	12.2	37.0
260.000000	24.5	1000.0	120.000	155.0	V	12.5	37.0
286.000000	33.0	1000.0	120.000	155.0	V	4.0	37.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,110V~/60Hz)

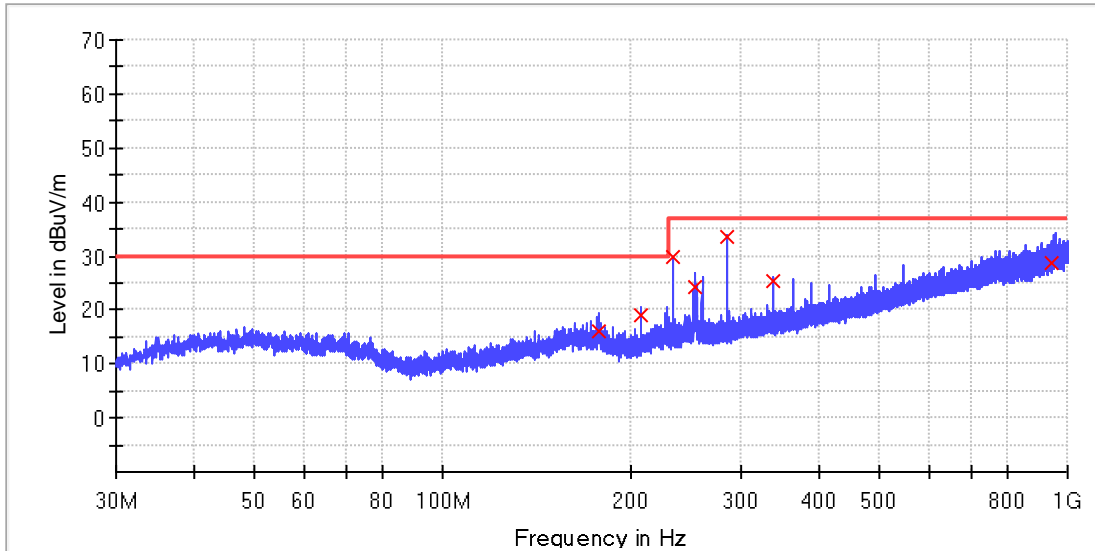


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - QPK (dB)	Limit - QPK (dBuV/)
177.440000	16.0	1000.0	120.000	155.0	H	14.1	30.0
208.000000	19.1	1000.0	120.000	155.0	H	10.9	30.0
234.000000	29.7	1000.0	120.000	155.0	H	7.3	37.0
253.480000	24.1	1000.0	120.000	155.0	H	12.9	37.0
286.000000	33.6	1000.0	120.000	155.0	H	3.4	37.0
338.000000	25.4	1000.0	120.000	155.0	H	11.6	37.0
945.960000	28.7	1000.0	120.000	155.0	H	8.3	37.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,110V~/60Hz)

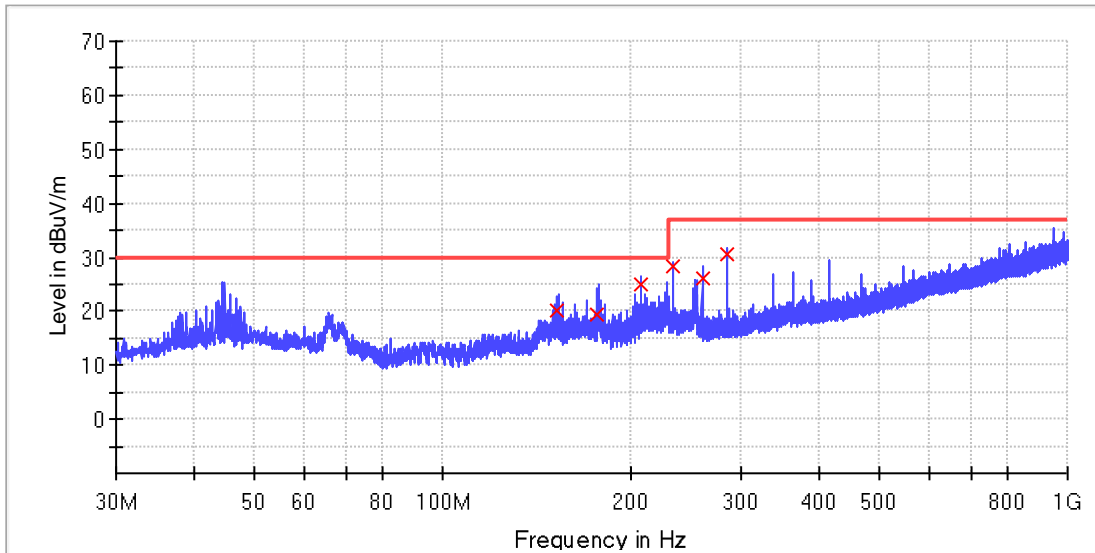


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - QPK (dB)	Limit - QPK (dBuV/)
152.120000	20.2	1000.0	120.000	155.0	V	9.9	30.0
176.680000	19.2	1000.0	120.000	155.0	V	10.8	30.0
208.000000	25.1	1000.0	120.000	155.0	V	4.9	30.0
234.000000	28.4	1000.0	120.000	155.0	V	8.6	37.0
260.000000	26.1	1000.0	120.000	155.0	V	10.9	37.0
286.000000	30.6	1000.0	120.000	155.0	V	6.4	37.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,230V~/50Hz)

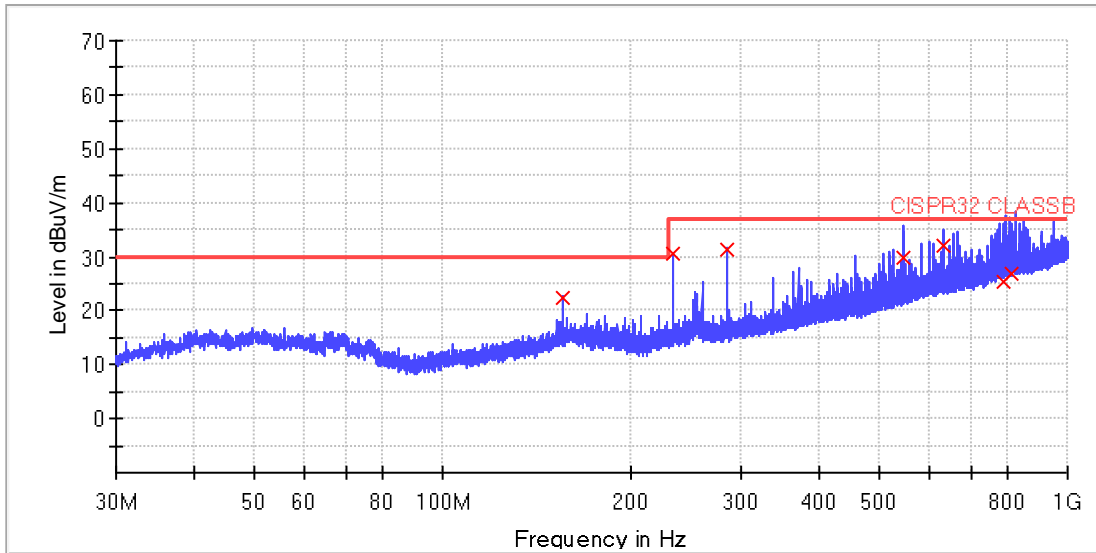


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - QPK (dB)	Limit - QPK (dBuV/)
156.000000	22.4	1000.0	120.000	385.0	H	7.6	30.0
234.000000	30.4	1000.0	120.000	385.0	H	6.6	37.0
286.000000	31.1	1000.0	120.000	385.0	H	5.9	37.0
546.800000	29.9	1000.0	120.000	385.0	H	7.1	37.0
630.640000	32.0	1000.0	120.000	385.0	H	5.0	37.0
788.520000	25.3	1000.0	120.000	385.0	H	11.7	37.0
814.240000	27.0	1000.0	120.000	385.0	H	10.0	37.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,230V~/50Hz)

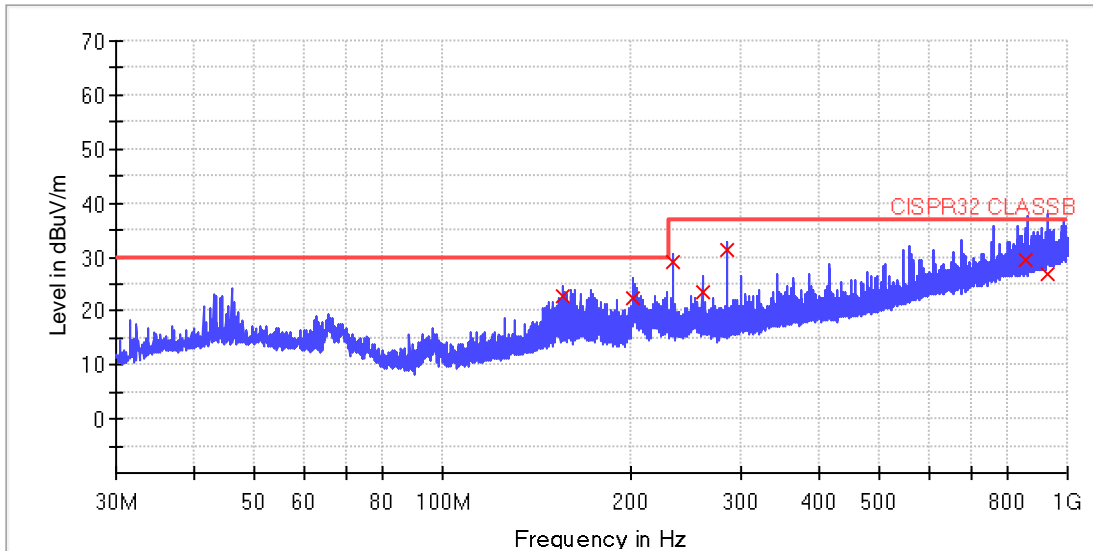


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - QPK (dB)	Limit - QPK (dBuV/)
156.000000	22.7	1000.0	120.000	155.0	V	7.3	30.0
201.960000	22.2	1000.0	120.000	155.0	V	7.8	30.0
234.000000	29.2	1000.0	120.000	155.0	V	7.8	37.0
260.000000	23.5	1000.0	120.000	155.0	V	13.5	37.0
286.000000	31.1	1000.0	120.000	155.0	V	5.9	37.0
858.000000	29.4	1000.0	120.000	155.0	V	7.7	37.0
931.240000	27.0	1000.0	120.000	155.0	V	10.0	37.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,110V~/60Hz)

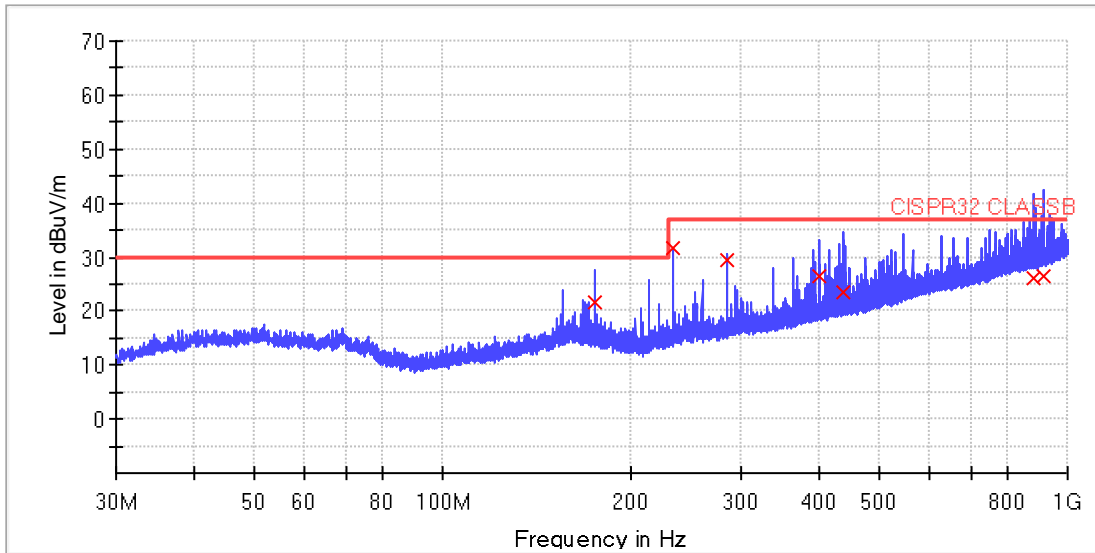


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - QPK (dB)	Limit - QPK (dBuV/)
175.320000	21.5	1000.0	120.000	385.0	H	8.5	30.0
234.000000	31.8	1000.0	120.000	385.0	H	5.2	37.0
286.000000	29.5	1000.0	120.000	385.0	H	7.5	37.0
399.280000	26.4	1000.0	120.000	385.0	H	10.7	37.0
438.040000	23.5	1000.0	120.000	385.0	H	13.5	37.0
883.240000	26.2	1000.0	120.000	385.0	H	10.8	37.0
913.880000	26.6	1000.0	120.000	385.0	H	10.4	37.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,110V~/60Hz)

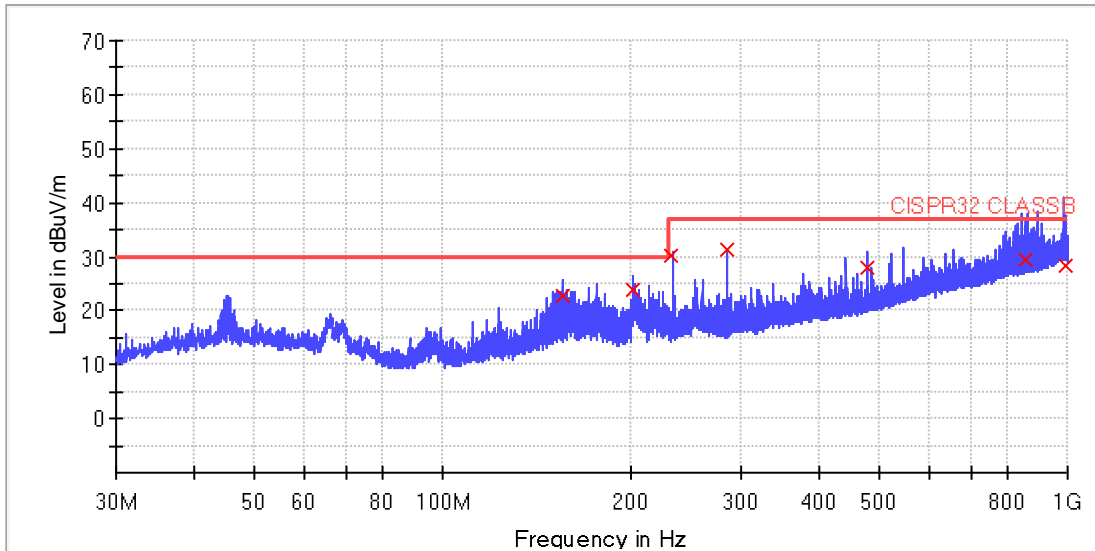


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - QPK (dB)	Limit - QPK (dBuV/)
156.000000	22.8	1000.0	120.000	155.0	V	7.2	30.0
202.000000	23.9	1000.0	120.000	155.0	V	6.1	30.0
231.000000	30.1	1000.0	120.000	155.0	V	6.9	37.0
286.000000	31.3	1000.0	120.000	155.0	V	5.7	37.0
479.640000	28.1	1000.0	120.000	155.0	V	8.9	37.0
858.000000	29.4	1000.0	120.000	155.0	V	7.6	37.0
994.280000	28.3	1000.0	120.000	155.0	V	8.7	37.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,230V~/50Hz)

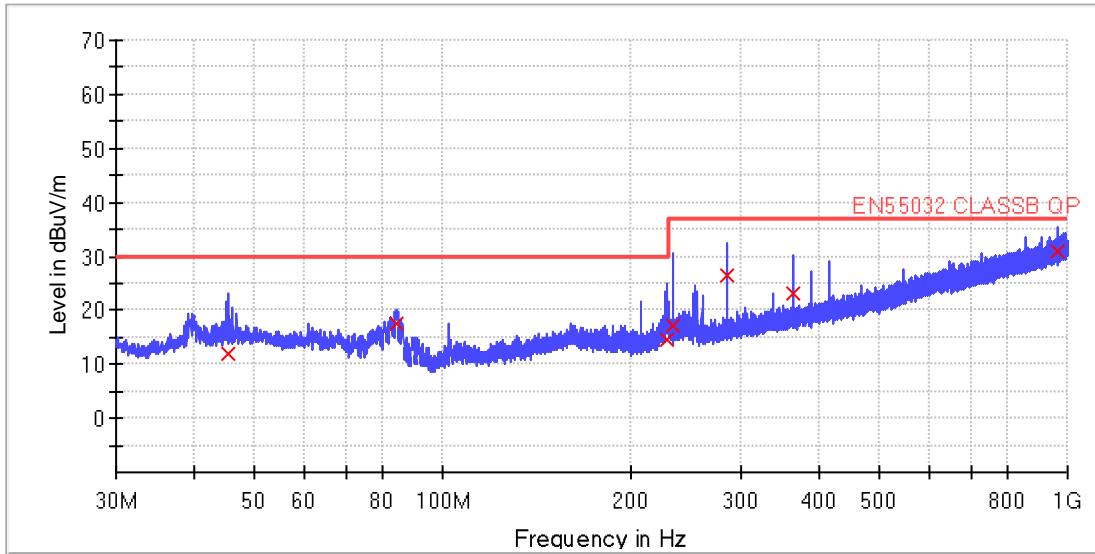


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
45.480000	11.9	1000.0	120.000	155.0	H	-1.0	18.1	30.0
84.560000	17.7	1000.0	120.000	155.0	H	-1.0	12.3	30.0
228.360000	14.4	1000.0	120.000	155.0	H	-1.0	15.6	30.0
234.000000	17.1	1000.0	120.000	155.0	H	-1.0	19.9	37.0
286.000000	26.3	1000.0	120.000	155.0	H	-1.0	10.7	37.0
364.000000	23.3	1000.0	120.000	155.0	H	-1.0	13.7	37.0
962.000000	30.8	1000.0	120.000	155.0	H	-1.0	6.2	37.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,230V~/50Hz)

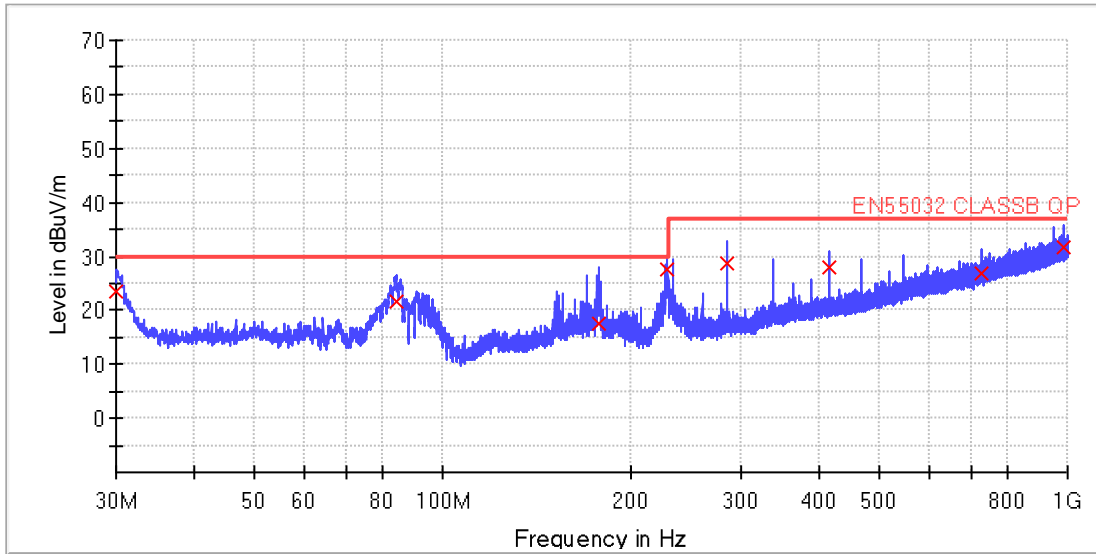


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
30.080000	23.6	1000.0	120.000	155.0	V	-1.0	6.5	30.0
84.200000	21.7	1000.0	120.000	155.0	V	-1.0	8.3	30.0
177.640000	17.5	1000.0	120.000	155.0	V	-1.0	12.5	30.0
228.400000	27.4	1000.0	120.000	155.0	V	-1.0	2.6	30.0
286.000000	28.6	1000.0	120.000	155.0	V	-1.0	8.4	37.0
416.000000	28.0	1000.0	120.000	155.0	V	-1.0	9.0	37.0
728.000000	26.9	1000.0	120.000	155.0	V	-1.0	10.1	37.0
988.000000	31.8	1000.0	120.000	155.0	V	-1.0	5.2	37.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,110V~/60Hz)

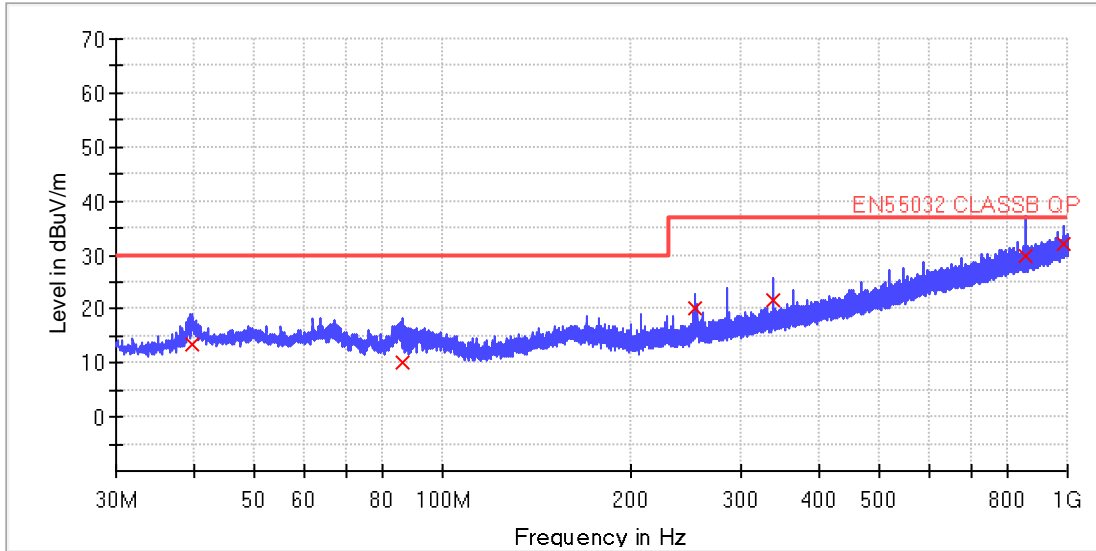


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
39.800000	13.3	1000.0	120.000	155.0	H	-1.0	16.7	30.0
86.120000	9.9	1000.0	120.000	155.0	H	-1.0	20.1	30.0
253.640000	20.2	1000.0	120.000	155.0	H	-1.0	16.8	37.0
338.000000	21.6	1000.0	120.000	155.0	H	-1.0	15.4	37.0
857.960000	29.9	1000.0	120.000	155.0	H	-1.0	7.1	37.0
988.000000	31.9	1000.0	120.000	155.0	H	-1.0	5.1	37.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,110V~/60Hz)

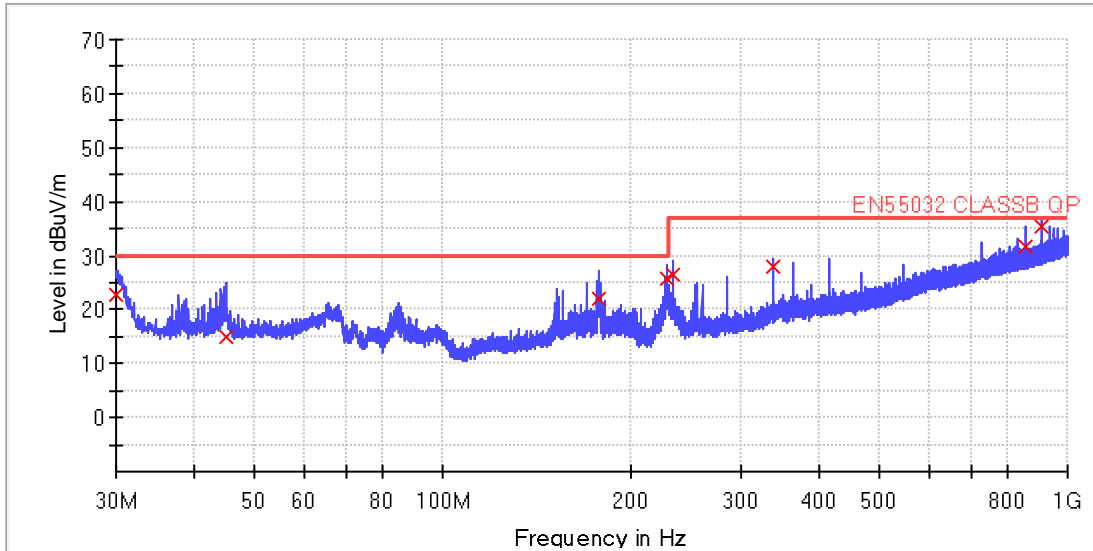


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
30.000000	22.7	1000.0	120.000	155.0	V	-1.0	7.3	30.0
45.120000	14.9	1000.0	120.000	155.0	V	-1.0	15.2	30.0
177.560000	22.0	1000.0	120.000	155.0	V	-1.0	8.0	30.0
228.280000	25.6	1000.0	120.000	155.0	V	-1.0	4.4	30.0
234.000000	26.4	1000.0	120.000	155.0	V	-1.0	10.6	37.0
338.000000	27.9	1000.0	120.000	155.0	V	-1.0	9.2	37.0
858.000000	31.7	1000.0	120.000	155.0	V	-1.0	5.3	37.0
910.000000	35.3	1000.0	120.000	155.0	V	-1.0	1.7	37.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,230V~/50Hz)

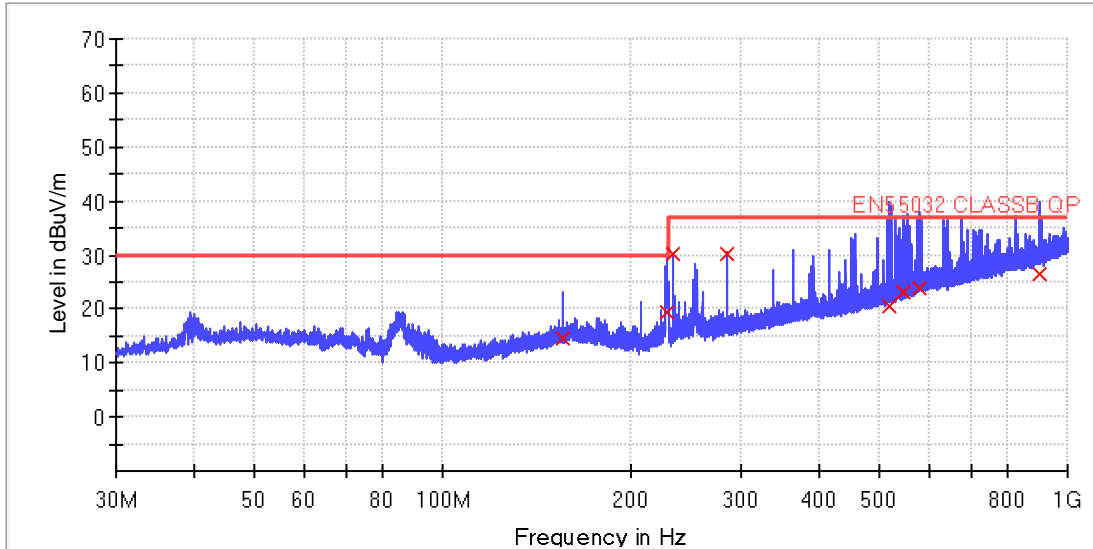


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
156.000000	14.5	1000.0	120.000	155.0	H	-1.0	15.5	30.0
228.400000	19.4	1000.0	120.000	155.0	H	-1.0	10.7	30.0
234.000000	30.3	1000.0	120.000	155.0	H	-1.0	6.7	37.0
286.000000	30.1	1000.0	120.000	155.0	H	-1.0	6.9	37.0
518.880000	20.5	1000.0	120.000	155.0	H	-1.0	16.5	37.0
546.080000	23.0	1000.0	120.000	155.0	H	-1.0	14.0	37.0
580.440000	23.9	1000.0	120.000	155.0	H	-1.0	13.2	37.0
903.240000	26.4	1000.0	120.000	155.0	H	-1.0	10.6	37.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,230V~/50Hz)

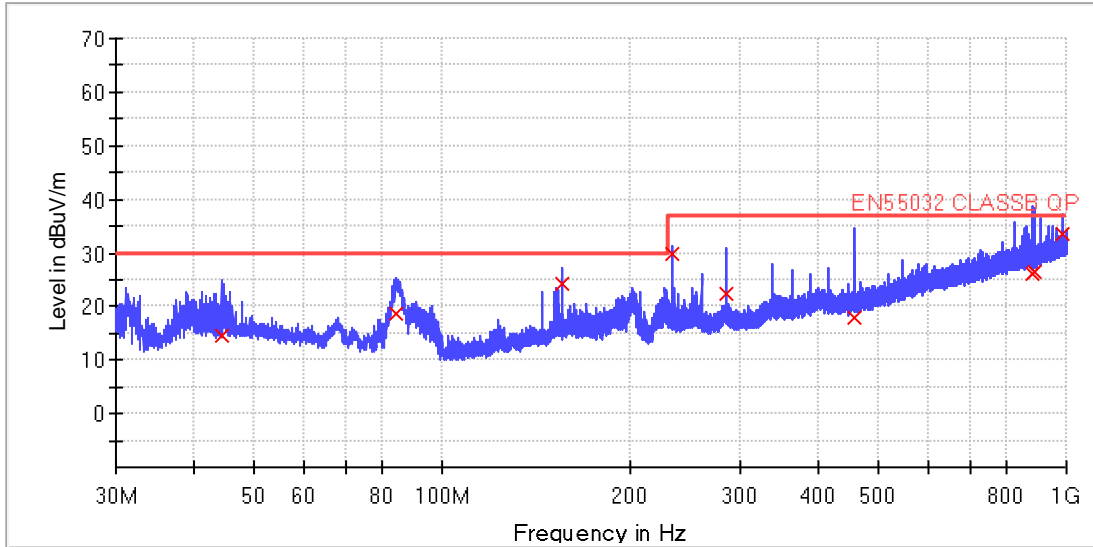


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
44.240000	14.7	1000.0	120.000	155.0	V	-1.0	15.3	30.0
84.480000	18.7	1000.0	120.000	155.0	V	-1.0	11.3	30.0
156.000000	24.2	1000.0	120.000	155.0	V	-1.0	5.8	30.0
234.000000	29.9	1000.0	120.000	155.0	V	-1.0	7.1	37.0
286.000000	22.4	1000.0	120.000	155.0	V	-1.0	14.6	37.0
458.000000	17.8	1000.0	120.000	155.0	V	-1.0	19.2	37.0
882.520000	26.1	1000.0	120.000	155.0	V	-1.0	10.9	37.0
887.480000	26.3	1000.0	120.000	155.0	V	-1.0	10.7	37.0
988.000000	33.4	1000.0	120.000	155.0	V	-1.0	3.6	37.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,110V~/60Hz)

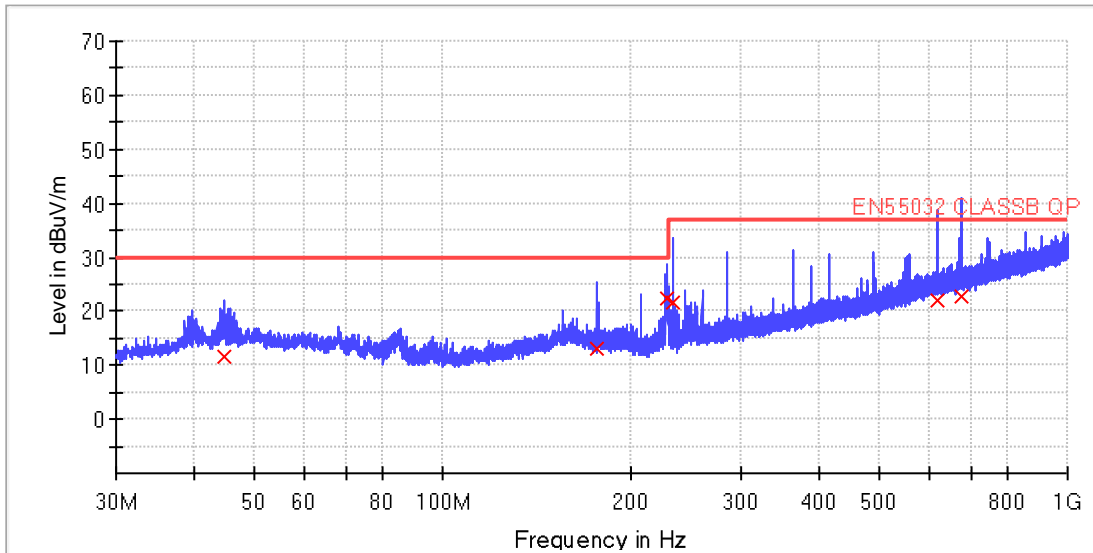


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
44.600000	11.6	1000.0	120.000	155.0	H	-1.0	18.4	30.0
176.800000	13.2	1000.0	120.000	155.0	H	-1.0	16.8	30.0
228.320000	22.3	1000.0	120.000	155.0	H	-1.0	7.7	30.0
234.000000	21.5	1000.0	120.000	155.0	H	-1.0	15.5	37.0
618.520000	21.9	1000.0	120.000	155.0	H	-1.0	15.1	37.0
674.280000	22.6	1000.0	120.000	155.0	H	-1.0	14.4	37.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,110V~/60Hz)

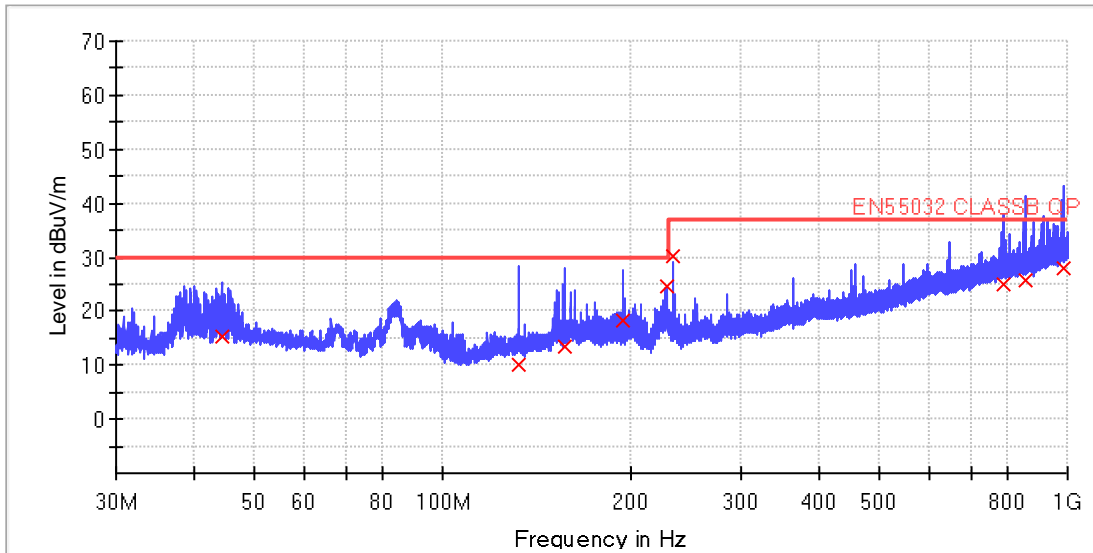


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
44.240000	15.1	1000.0	120.000	155.0	V	-1.0	14.9	30.0
132.520000	10.1	1000.0	120.000	155.0	V	-1.0	20.0	30.0
156.840000	13.4	1000.0	120.000	155.0	V	-1.0	16.6	30.0
194.720000	18.4	1000.0	120.000	155.0	V	-1.0	11.6	30.0
228.280000	24.6	1000.0	120.000	155.0	V	-1.0	5.4	30.0
234.000000	30.1	1000.0	120.000	155.0	V	-1.0	6.9	37.0
792.040000	25.1	1000.0	120.000	155.0	V	-1.0	11.9	37.0
855.240000	25.7	1000.0	120.000	155.0	V	-1.0	11.3	37.0
982.400000	28.1	1000.0	120.000	155.0	V	-1.0	8.9	37.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,230V~/50Hz)

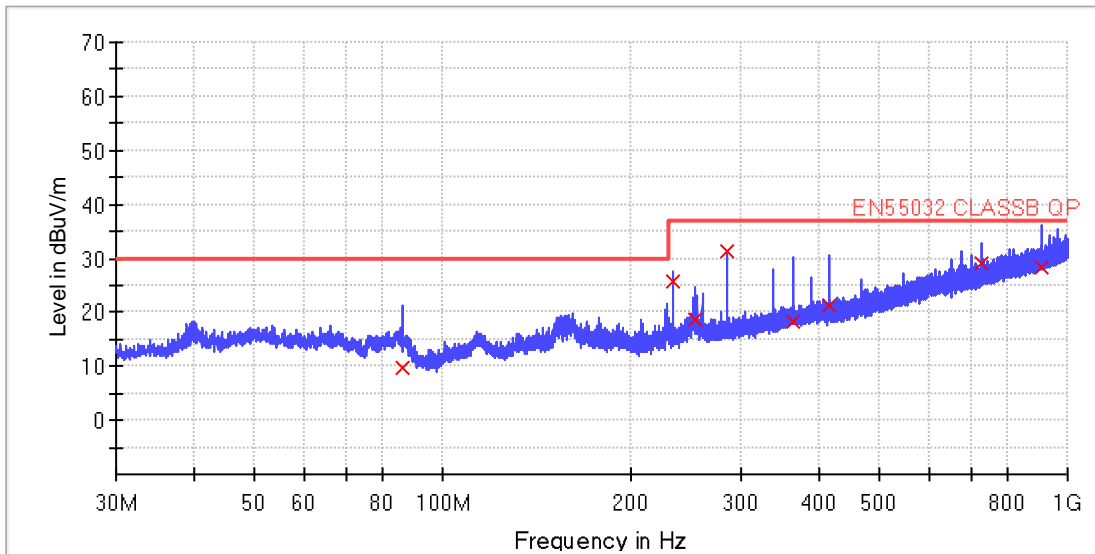


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
86.480000	9.9	1000.0	120.000	155.0	H	-1.0	20.1	30.0
234.000000	25.7	1000.0	120.000	155.0	H	-1.0	11.3	37.0
252.880000	18.7	1000.0	120.000	155.0	H	-1.0	18.3	37.0
286.000000	31.3	1000.0	120.000	155.0	H	-1.0	5.7	37.0
364.000000	18.4	1000.0	120.000	155.0	H	-1.0	18.6	37.0
416.000000	21.2	1000.0	120.000	155.0	H	-1.0	15.8	37.0
728.000000	29.2	1000.0	120.000	155.0	H	-1.0	7.8	37.0
910.000000	28.3	1000.0	120.000	155.0	H	-1.0	8.7	37.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,230V~/50Hz)

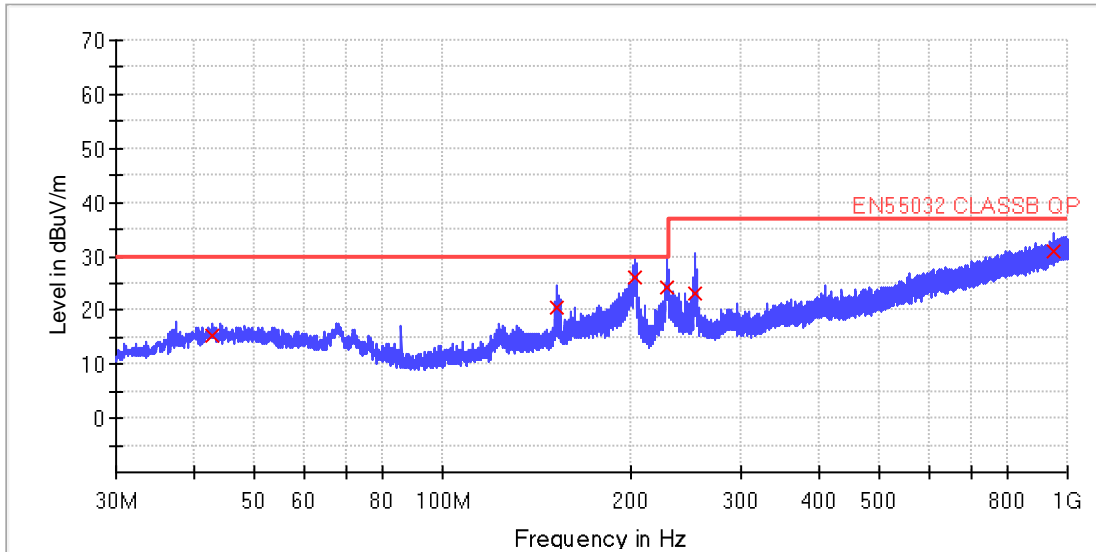


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
42.800000	15.4	1000.0	120.000	155.0	V	-1.0	14.6	30.0
152.320000	20.5	1000.0	120.000	155.0	V	-1.0	9.6	30.0
203.120000	26.2	1000.0	120.000	155.0	V	-1.0	3.8	30.0
228.480000	24.1	1000.0	120.000	155.0	V	-1.0	5.9	30.0
253.840000	23.3	1000.0	120.000	155.0	V	-1.0	13.8	37.0
948.600000	30.8	1000.0	120.000	155.0	V	-1.0	6.2	37.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,110V~/60Hz)

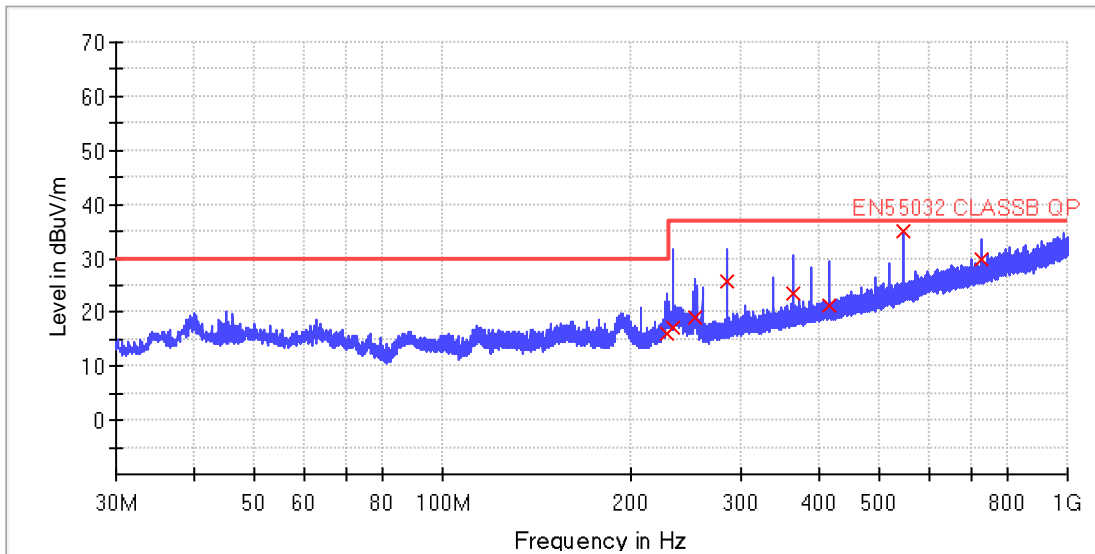


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
228.160000	15.9	1000.0	120.000	155.0	H	-1.0	14.1	30.0
234.000000	17.3	1000.0	120.000	155.0	H	-1.0	19.7	37.0
253.520000	19.0	1000.0	120.000	155.0	H	-1.0	18.1	37.0
286.000000	25.5	1000.0	120.000	155.0	H	-1.0	11.5	37.0
364.000000	23.7	1000.0	120.000	155.0	H	-1.0	13.3	37.0
416.000000	21.3	1000.0	120.000	155.0	H	-1.0	15.7	37.0
546.000000	35.0	1000.0	120.000	155.0	H	-1.0	2.0	37.0
728.000000	29.7	1000.0	120.000	155.0	H	-1.0	7.3	37.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (charging mode,110V~/60Hz)

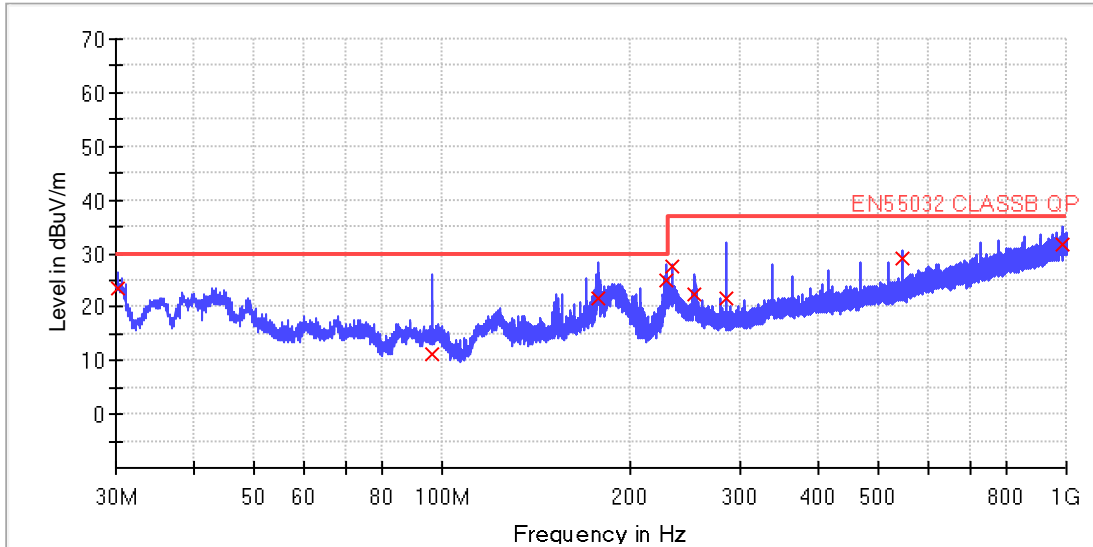


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
30.240000	23.3	1000.0	120.000	155.0	V	-1.0	6.7	30.0
96.360000	11.2	1000.0	120.000	155.0	V	-1.0	18.8	30.0
177.400000	21.6	1000.0	120.000	155.0	V	-1.0	8.4	30.0
228.080000	25.0	1000.0	120.000	155.0	V	-1.0	5.0	30.0
234.000000	27.8	1000.0	120.000	155.0	V	-1.0	9.3	37.0
252.680000	22.3	1000.0	120.000	155.0	V	-1.0	14.7	37.0
286.000000	21.6	1000.0	120.000	155.0	V	-1.0	15.4	37.0
546.000000	29.0	1000.0	120.000	155.0	V	-1.0	8.0	37.0
988.000000	31.9	1000.0	120.000	155.0	V	-1.0	5.2	37.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,230V~/50Hz)

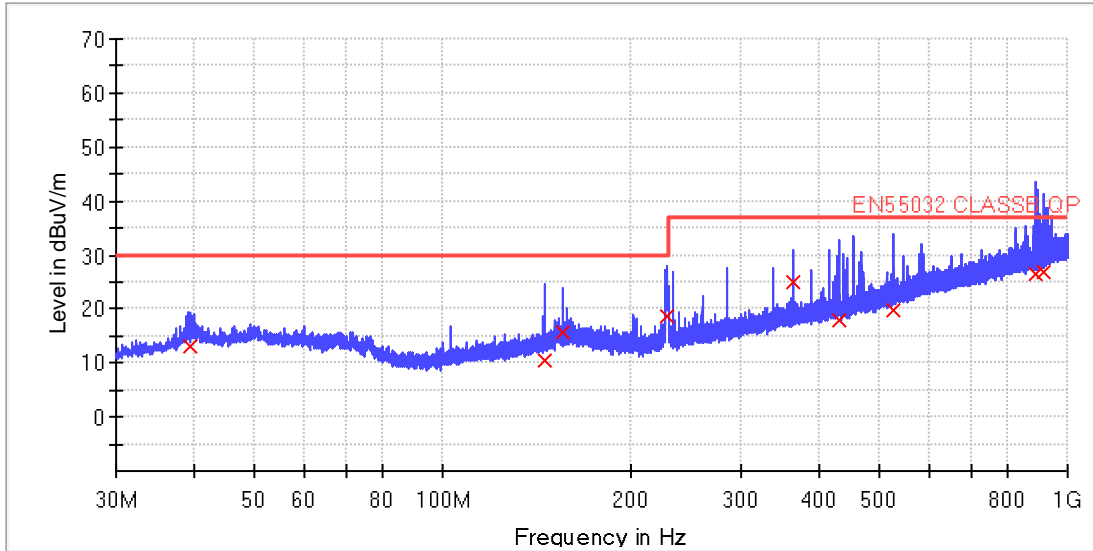


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
39.560000	13.2	1000.0	120.000	155.0	H	-1.0	16.8	30.0
145.400000	10.4	1000.0	120.000	155.0	H	-1.0	19.6	30.0
156.000000	15.8	1000.0	120.000	155.0	H	-1.0	14.2	30.0
228.440000	18.8	1000.0	120.000	155.0	H	-1.0	11.2	30.0
364.000000	24.9	1000.0	120.000	155.0	H	-1.0	12.1	37.0
431.840000	17.9	1000.0	120.000	155.0	H	-1.0	19.1	37.0
527.680000	19.8	1000.0	120.000	155.0	H	-1.0	17.2	37.0
889.920000	26.4	1000.0	120.000	155.0	H	-1.0	10.7	37.0
916.280000	26.7	1000.0	120.000	155.0	H	-1.0	10.3	37.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,230V~/50Hz)

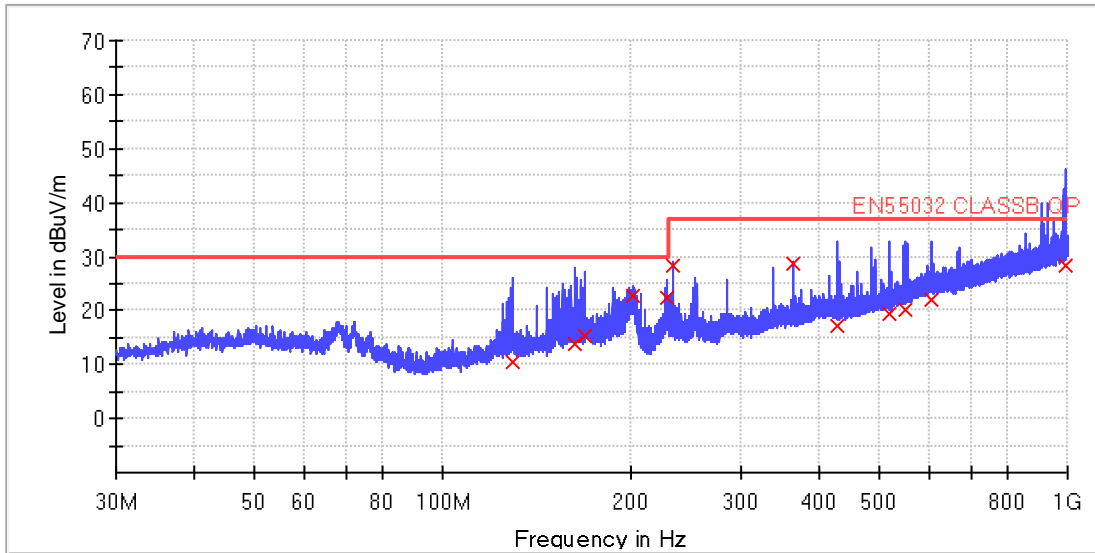


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
129.560000	10.3	1000.0	120.000	155.0	V	-1.0	19.7	30.0
162.560000	13.7	1000.0	120.000	155.0	V	-1.0	16.3	30.0
168.240000	15.1	1000.0	120.000	155.0	V	-1.0	14.9	30.0
202.240000	22.9	1000.0	120.000	155.0	V	-1.0	7.1	30.0
228.400000	22.4	1000.0	120.000	155.0	V	-1.0	7.6	30.0
234.000000	28.4	1000.0	120.000	155.0	V	-1.0	8.6	37.0
364.000000	28.8	1000.0	120.000	155.0	V	-1.0	8.2	37.0
428.760000	17.2	1000.0	120.000	155.0	V	-1.0	19.8	37.0
518.480000	19.3	1000.0	120.000	155.0	V	-1.0	17.7	37.0
549.080000	20.1	1000.0	120.000	155.0	V	-1.0	16.9	37.0
605.200000	21.8	1000.0	120.000	155.0	V	-1.0	15.2	37.0
992.360000	28.4	1000.0	120.000	155.0	V	-1.0	8.6	37.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,110V~/60Hz)

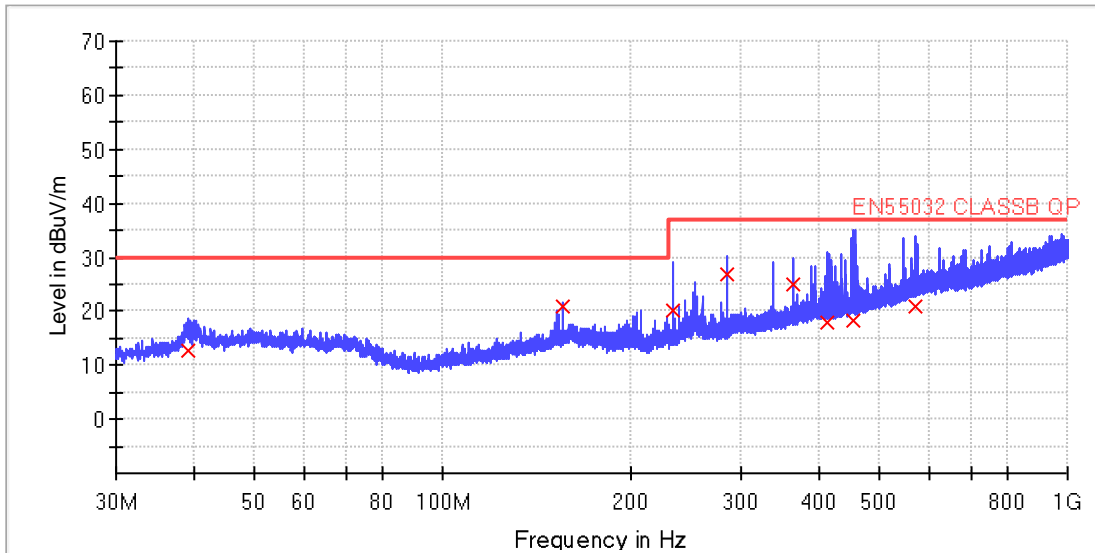


Graphical Results - Horizontal Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
39.120000	12.8	1000.0	120.000	155.0	H	-1.0	17.2	30.0
156.000000	20.7	1000.0	120.000	155.0	H	-1.0	9.3	30.0
234.000000	20.1	1000.0	120.000	155.0	H	-1.0	16.9	37.0
286.000000	26.9	1000.0	120.000	155.0	H	-1.0	10.1	37.0
364.000000	25.0	1000.0	120.000	155.0	H	-1.0	12.0	37.0
413.560000	17.8	1000.0	120.000	155.0	H	-1.0	19.2	37.0
454.240000	18.2	1000.0	120.000	155.0	H	-1.0	18.8	37.0
569.280000	20.9	1000.0	120.000	155.0	H	-1.0	16.2	37.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Frequency Range of Test: 30 MHz to 1 GHz (running mode,110V~/60Hz)

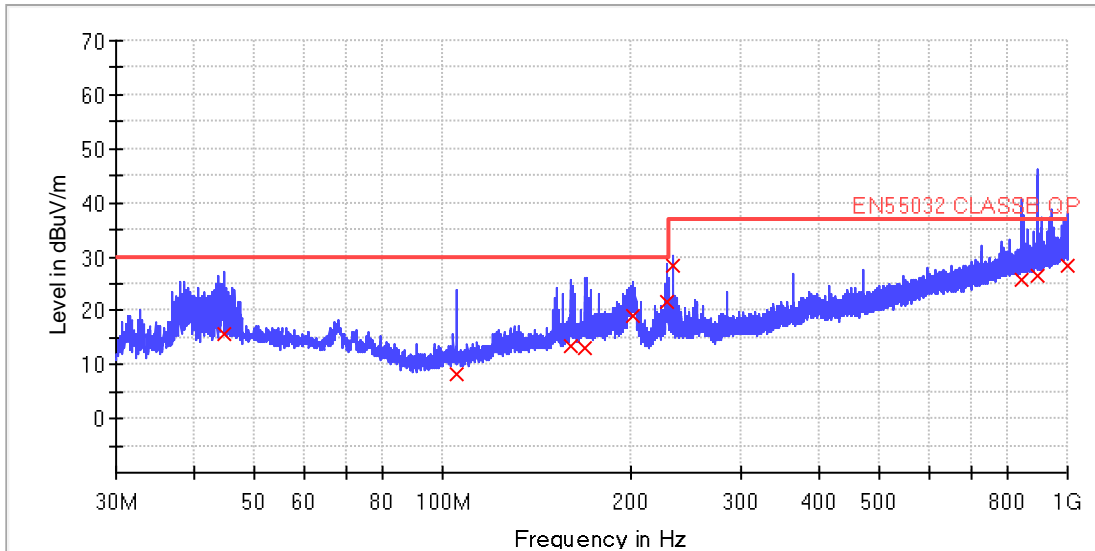


Graphical Results - Vertical Polarity

QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
44.720000	15.5	1000.0	120.000	155.0	V	-1.0	14.5	30.0
105.000000	8.2	1000.0	120.000	155.0	V	-1.0	21.8	30.0
160.400000	13.4	1000.0	120.000	155.0	V	-1.0	16.7	30.0
169.400000	13.0	1000.0	120.000	155.0	V	-1.0	17.0	30.0
202.000000	19.2	1000.0	120.000	155.0	V	-1.0	10.8	30.0
229.080000	21.8	1000.0	120.000	155.0	V	-1.0	8.2	30.0
234.000000	28.4	1000.0	120.000	155.0	V	-1.0	8.6	37.0
844.320000	25.7	1000.0	120.000	155.0	V	-1.0	11.3	37.0
894.280000	26.4	1000.0	120.000	155.0	V	-1.0	10.6	37.0
999.360000	28.4	1000.0	120.000	155.0	V	-1.0	8.6	37.0

For adaptor: adapter 1_FY2401500S1, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (charging mode,110V~/60Hz)

RE-1-6GHz-3115-Pre

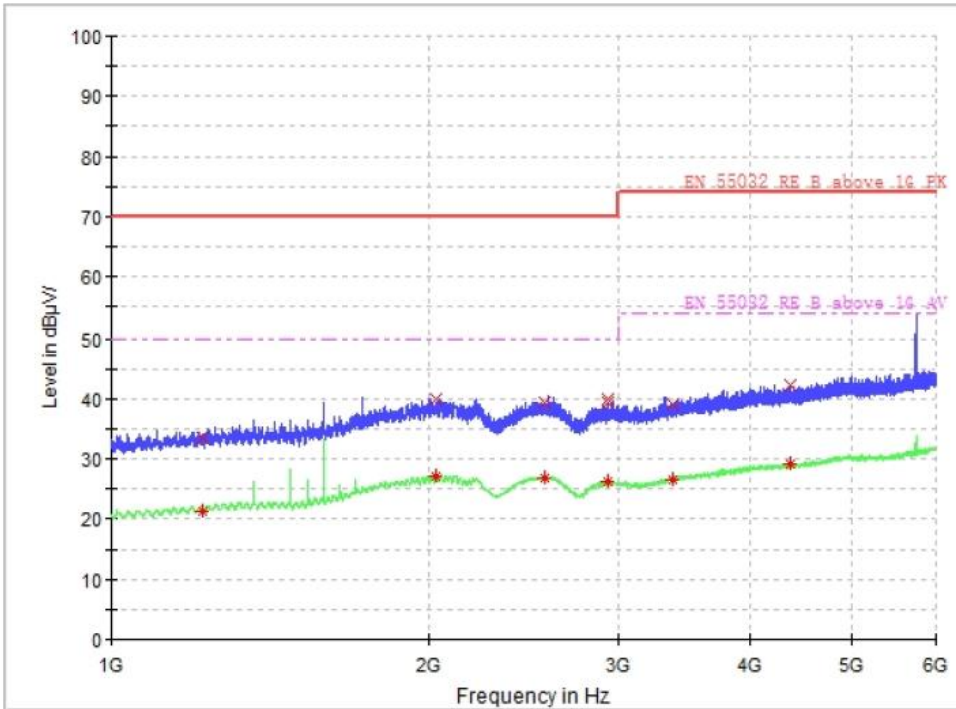

Graphical Results - Horizontal Polarity

PK


Frequency (MHz)	MaxPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Poi	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dB μ V/m)
1221.200000	33.5	1000.0	1000.000	105.0	H	23	-7.6	36.5	70.0
2028.800000	39.8	1000.0	1000.000	100.0	H	121	0.2	30.2	70.0
2558.800000	39.3	1000.0	1000.000	150.0	H	145	-0.1	30.7	70.0
2941.200000	39.3	1000.0	1000.000	100.0	H	176	0.8	30.7	70.0
2941.200000	39.9	1000.0	1000.000	103.0	H	214	0.8	30.1	70.0
3388.400000	39.0	1000.0	1000.000	105.0	H	269	2.5	35.0	74.0
4372.400000	42.2	1000.0	1000.000	100.0	H	280	6.2	31.8	74.0

CAV

Frequency (MHz)	CAverage (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Poi	Azimuth (deg)	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dB μ V/m)
1221.200000	21.2	1000.0	1000.000	105.0	H	23	-7.6	28.8	50.0
2028.800000	27.2	1000.0	1000.000	100.0	H	121	0.2	22.8	50.0
2558.800000	26.8	1000.0	1000.000	150.0	H	145	-0.1	23.2	50.0
2941.200000	26.2	1000.0	1000.000	100.0	H	176	0.8	23.8	50.0
2941.200000	26.2	1000.0	1000.000	103.0	H	214	0.8	23.8	50.0
3388.400000	26.5	1000.0	1000.000	105.0	H	269	2.5	27.5	54.0
4372.400000	29.0	1000.0	1000.000	100.0	H	280	6.2	25.0	54.0



For adaptor: adapter 1_FY2401500S1, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (charging mode,110V~/60Hz)

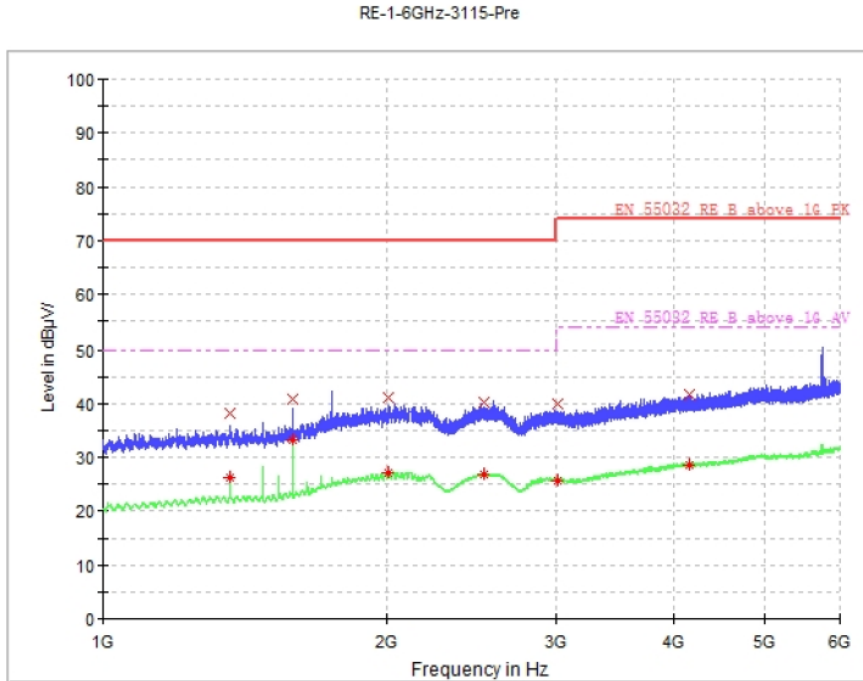

Graphical Results - Vertical Polarity

PK

Frequency (MHz)	MaxPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dB μ V/m)
1362.000000	38.1	1000.0	1000.000	100.0	V	54	-6.4	32.0	70.0
1362.000000	38.1	1000.0	1000.000	100.0	V	123	-6.4	32.0	70.0
1589.200000	40.7	1000.0	1000.000	100.0	V	143	-4.3	29.3	70.0
2006.800000	41.2	1000.0	1000.000	100.0	V	187	0.2	28.8	70.0
2525.200000	40.3	1000.0	1000.000	100.0	V	222	-0.1	29.7	70.0
3014.800000	40.1	1000.0	1000.000	100.0	V	253	0.9	33.9	74.0
4156.400000	41.8	1000.0	1000.000	100.0	V	298	5.7	32.2	74.0


CAV

Frequency (MHz)	CAverage (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dB μ V/m)
1362.000000	26.3	1000.0	1000.000	100.0	V	54	-6.4	23.7	50.0
1362.000000	26.3	1000.0	1000.000	100.0	V	123	-6.4	23.7	50.0
1589.200000	33.2	1000.0	1000.000	100.0	V	143	-4.3	16.8	50.0
2006.800000	27.1	1000.0	1000.000	100.0	V	187	0.2	22.9	50.0
2525.200000	26.8	1000.0	1000.000	100.0	V	222	-0.1	23.2	50.0
3014.800000	25.6	1000.0	1000.000	100.0	V	253	0.9	28.4	54.0
4156.400000	28.5	1000.0	1000.000	100.0	V	298	5.7	25.5	54.0



For adaptor: adapter 1_FY2401500S1, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (charging mode,230V~/50Hz)

RE-1-6GHz-3115-Pre

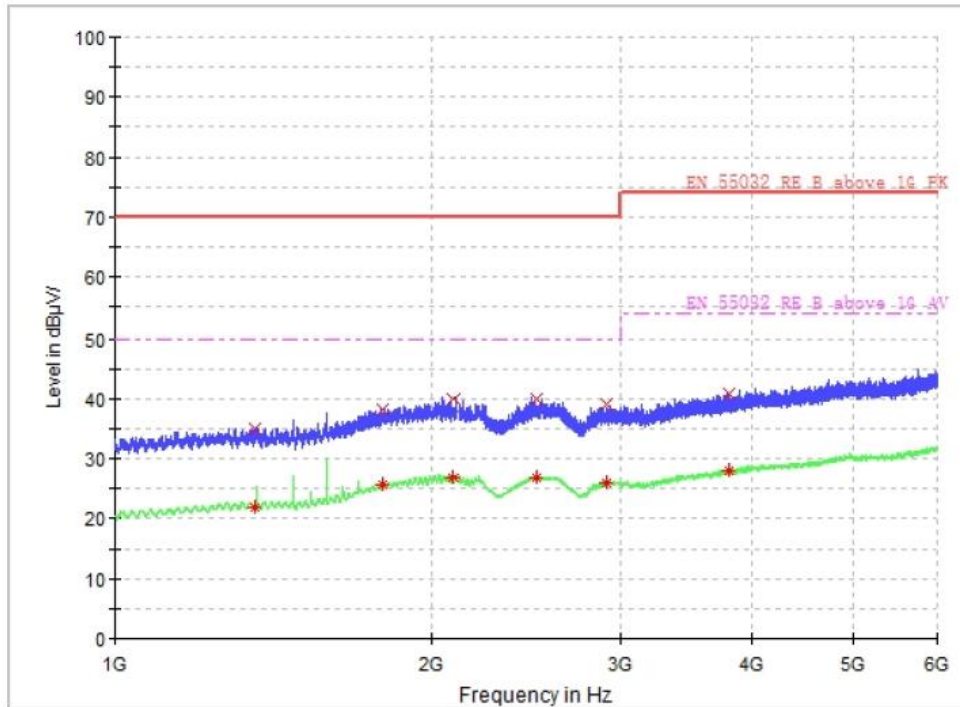

Graphical Results - Horizontal Polarity

PK


Frequency (MHz)	MaxPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Poi	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dB μ V/m)
1357.600000	35.0	1000.0	1000.000	103.0	H	121	-6.5	35.0	70.0
1796.000000	38.3	1000.0	1000.000	100.0	H	142	-1.9	31.7	70.0
2092.400000	40.1	1000.0	1000.000	135.0	H	256	0.2	30.0	70.0
2504.800000	40.0	1000.0	1000.000	120.0	H	287	-0.2	30.0	70.0
2918.000000	39.0	1000.0	1000.000	100.0	H	299	0.7	31.0	70.0
3809.600000	40.9	1000.0	1000.000	100.0	H	322	4.4	33.2	74.0

CAV

Frequency (MHz)	CAverage (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Poi	Azimuth (deg)	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dB μ V/m)
1357.600000	22.0	1000.0	1000.000	103.0	H	121	-6.5	28.0	50.0
1796.000000	25.8	1000.0	1000.000	100.0	H	142	-1.9	24.2	50.0
2092.400000	27.0	1000.0	1000.000	135.0	H	256	0.2	23.0	50.0
2504.800000	26.7	1000.0	1000.000	120.0	H	287	-0.2	23.3	50.0
2918.000000	26.0	1000.0	1000.000	100.0	H	299	0.7	24.0	50.0
3809.600000	28.0	1000.0	1000.000	100.0	H	322	4.4	26.0	54.0

For adaptor: adapter 1_FY2401500S1, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (charging mode,230V~/50Hz)

RE-1-6GHz-3115-Pre

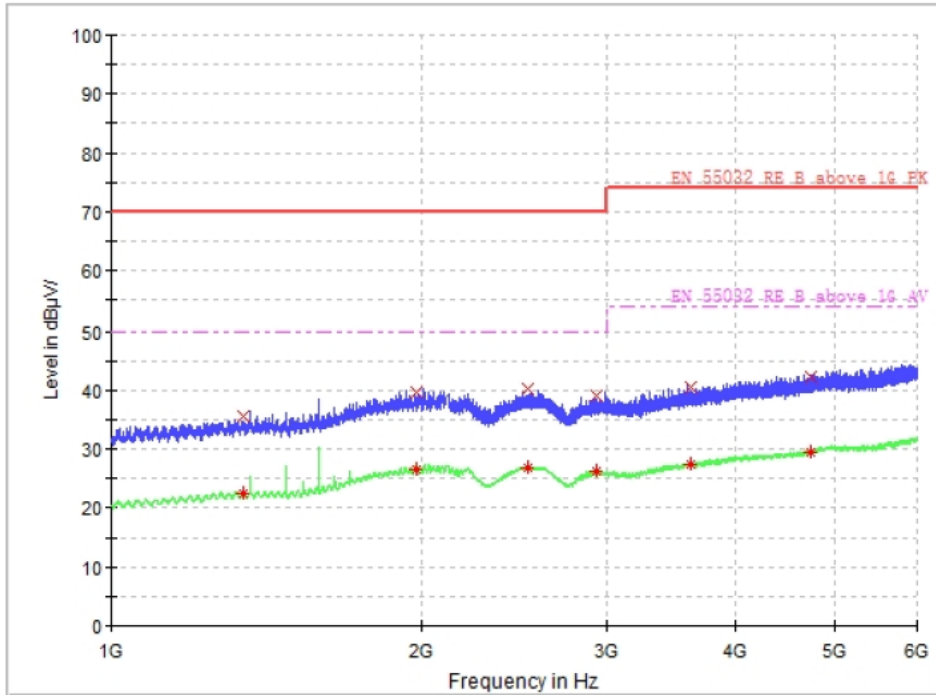

Graphical Results - Vertical Polarity


PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1342.800000	35.5	1000.0	1000.000	100.0	V	87	-6.6	34.5	70.0
1970.800000	39.7	1000.0	1000.000	100.0	V	143	-0.1	30.3	70.0
2525.200000	40.3	1000.0	1000.000	100.0	V	187	-0.1	29.7	70.0
2936.800000	38.9	1000.0	1000.000	100.0	V	321	0.8	31.1	70.0
3628.000000	40.5	1000.0	1000.000	100.0	V	337	3.5	33.5	74.0
4740.400000	42.1	1000.0	1000.000	100.0	V	354	7.3	31.9	74.0

CAV

Frequency (MHz)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG	Limit - AVG
1342.800000	22.6	1000.0	1000.000	100.0	V	87	-6.6	27.4	50.0
1970.800000	26.7	1000.0	1000.000	100.0	V	143	-0.1	23.3	50.0
2525.200000	26.8	1000.0	1000.000	100.0	V	187	-0.1	23.2	50.0
2936.800000	26.2	1000.0	1000.000	100.0	V	321	0.8	23.8	50.0
3628.000000	27.5	1000.0	1000.000	100.0	V	337	3.5	26.5	54.0
4740.400000	29.4	1000.0	1000.000	100.0	V	354	7.3	24.6	54.0

For adaptor: adaptor 1_FY2401500S1, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (running mode,110V~/60Hz)

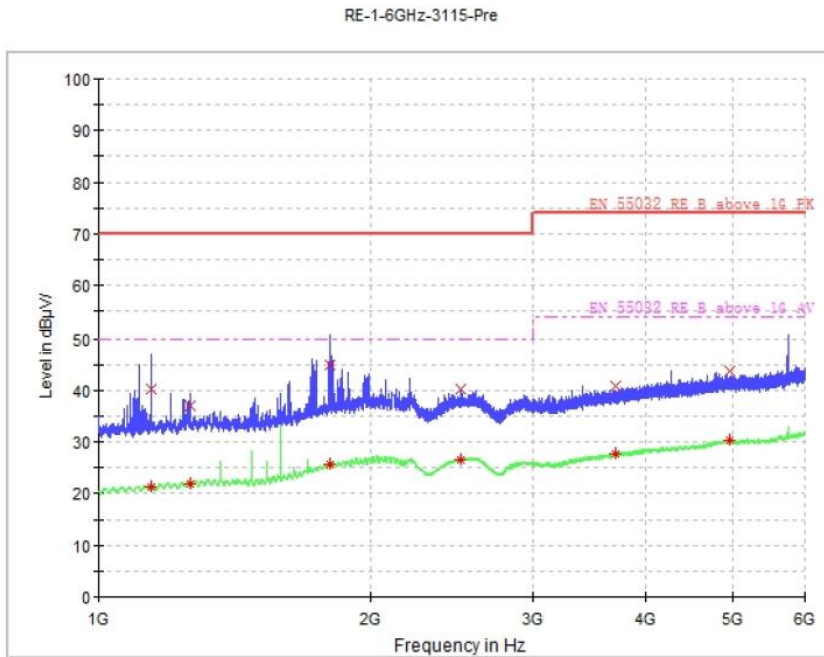

Graphical Results - Horizontal Polarity

PK


Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1142.400000	40.2	1000.0	1000.000	108.0	H	112	-8.3	29.8	70.0
1262.800000	36.9	1000.0	1000.000	123.0	H	154	-7.3	33.1	70.0
1801.600000	45.0	1000.0	1000.000	150.0	H	187	-1.9	25.0	70.0
2504.800000	40.3	1000.0	1000.000	155.0	H	226	-0.2	29.7	70.0
3714.000000	40.9	1000.0	1000.000	100.0	H	287	4.0	33.1	74.0
4954.000000	43.6	1000.0	1000.000	100.0	H	354	8.0	30.4	74.0

CAV

Frequency (MHz)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG	Limit - AVG
1142.400000	21.3	1000.0	1000.000	108.0	H	112	-8.3	28.7	50.0
1262.800000	21.7	1000.0	1000.000	123.0	H	154	-7.3	28.3	50.0
1801.600000	25.6	1000.0	1000.000	150.0	H	187	-1.9	24.4	50.0
2504.800000	26.7	1000.0	1000.000	155.0	H	226	-0.2	23.3	50.0
3714.000000	27.6	1000.0	1000.000	100.0	H	287	4.0	26.4	54.0
4954.000000	30.3	1000.0	1000.000	100.0	H	354	8.0	23.7	54.0

For adaptor: adapter 1_FY2401500S1, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (running mode,110V~/60Hz)

RE-1-6GHz-3115-Pre

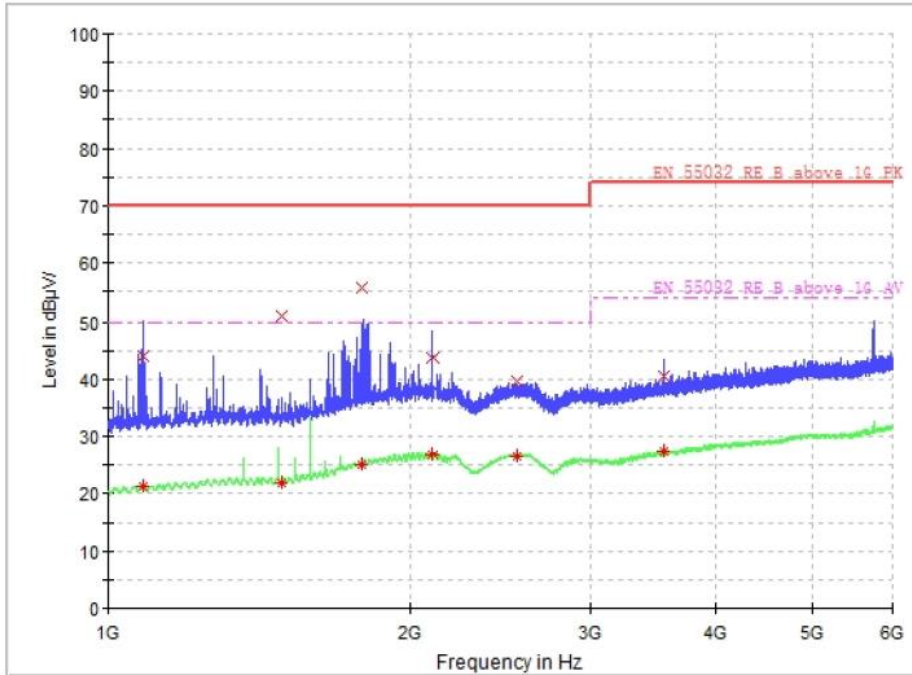

Graphical Results - Vertical Polarity

PK


Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1082.000000	44.1	1000.0	1000.000	100.0	V	145	-8.8	25.9	70.0
1487.200000	51.0	1000.0	1000.000	100.0	V	176	-5.4	19.0	70.0
1787.200000	55.8	1000.0	1000.000	100.0	V	115	-2.0	14.2	70.0
2095.200000	43.8	1000.0	1000.000	100.0	V	219	0.2	26.2	70.0
2536.000000	39.6	1000.0	1000.000	100.0	V	282	-0.1	30.4	70.0
3561.200000	40.5	1000.0	1000.000	100.0	V	309	3.2	33.5	74.0

CAV

Frequency (MHz)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG	Limit - AVG
1082.000000	21.3	1000.0	1000.000	100.0	V	145	-8.8	28.7	50.0
1487.200000	21.9	1000.0	1000.000	100.0	V	176	-5.4	28.1	50.0
1787.200000	25.0	1000.0	1000.000	100.0	V	115	-2.0	25.0	50.0
2095.200000	26.7	1000.0	1000.000	100.0	V	219	0.2	23.3	50.0
2536.000000	26.7	1000.0	1000.000	100.0	V	282	-0.1	23.3	50.0
3561.200000	27.4	1000.0	1000.000	100.0	V	309	3.2	26.6	54.0

For adaptor: adapter 1_FY2401500S1, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (running mode,230V~/50Hz)

RE-1-6GHz-3115-Pre

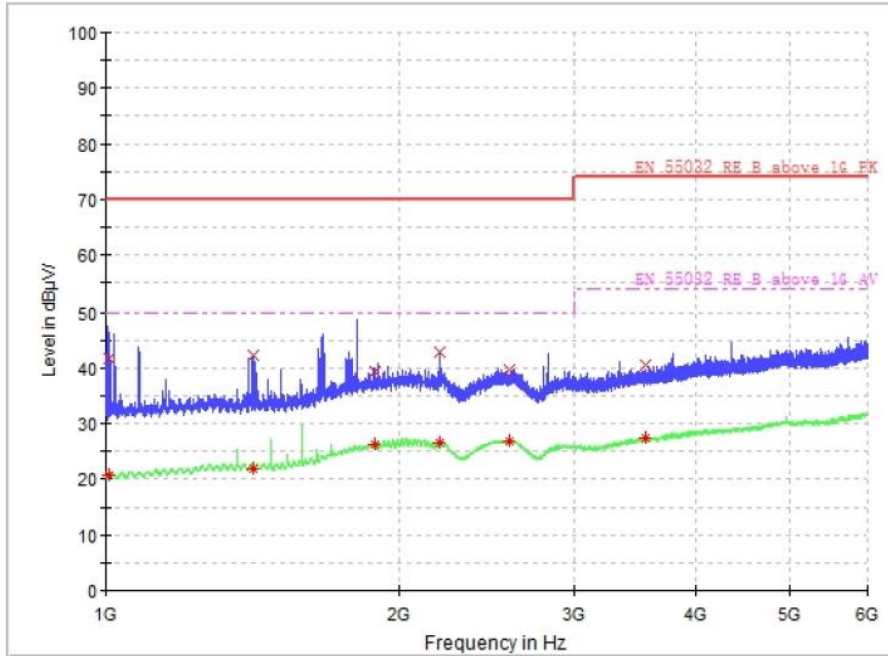

Graphical Results - Horizontal Polarity

PK


Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1009.200000	41.6	1000.0	1000.000	100.0	H	142	-9.5	28.4	70.0
1418.400000	42.3	1000.0	1000.000	150.0	H	185	-6.0	27.7	70.0
1883.600000	39.3	1000.0	1000.000	120.0	H	256	-1.0	30.7	70.0
2187.600000	42.9	1000.0	1000.000	125.0	H	283	0.1	27.1	70.0
2578.400000	39.7	1000.0	1000.000	100.0	H	299	0.0	30.3	70.0
3560.800000	40.6	1000.0	1000.000	100.0	H	316	3.2	33.4	74.0

CAV

Frequency (MHz)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG	Limit - AVG
1009.200000	20.6	1000.0	1000.000	100.0	H	142	-9.5	29.4	50.0
1418.400000	21.8	1000.0	1000.000	150.0	H	185	-6.0	28.2	50.0
1883.600000	26.3	1000.0	1000.000	120.0	H	256	-1.0	23.7	50.0
2187.600000	26.6	1000.0	1000.000	125.0	H	283	0.1	23.4	50.0
2578.400000	26.8	1000.0	1000.000	100.0	H	299	0.0	23.2	50.0
3560.800000	27.4	1000.0	1000.000	100.0	H	316	3.2	26.6	54.0

For adaptor: adapter 1_FY2401500S1, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (running mode,230V~/50Hz)

RE-1-6GHz-3115-Pre

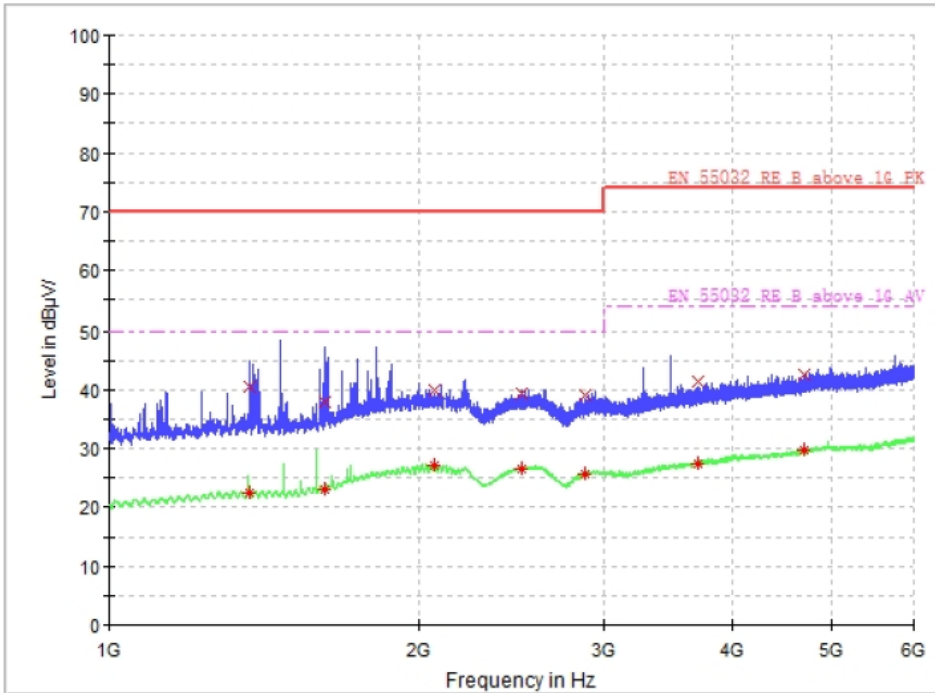

Graphical Results - Vertical Polarity


PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1367.600000	40.4	1000.0	1000.000	100.0	V	125	-6.4	29.6	70.0
1616.400000	37.8	1000.0	1000.000	100.0	V	163	-4.0	32.2	70.0
2070.400000	39.8	1000.0	1000.000	100.0	V	192	0.2	30.2	70.0
2502.000000	39.5	1000.0	1000.000	100.0	V	226	-0.2	30.5	70.0
2884.400000	39.1	1000.0	1000.000	100.0	V	249	0.6	30.9	70.0
3712.400000	41.3	1000.0	1000.000	100.0	V	287	3.9	32.7	74.0
4706.400000	42.6	1000.0	1000.000	100.0	V	306	7.2	31.4	74.0

CAV

Frequency (MHz)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG	Limit - AVG
1367.600000	22.4	1000.0	1000.000	100.0	V	125	-6.4	27.6	50.0
1616.400000	23.0	1000.0	1000.000	100.0	V	163	-4.0	27.0	50.0
2070.400000	27.0	1000.0	1000.000	100.0	V	192	0.2	23.0	50.0
2502.000000	26.6	1000.0	1000.000	100.0	V	226	-0.2	23.4	50.0
2884.400000	25.5	1000.0	1000.000	100.0	V	249	0.6	24.5	50.0
3712.400000	27.5	1000.0	1000.000	100.0	V	287	3.9	26.5	54.0
4706.400000	29.6	1000.0	1000.000	100.0	V	306	7.2	23.4	54.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Frequency Range of Test: 1 GHz to 6 GHz (charging mode,110V~/60Hz)

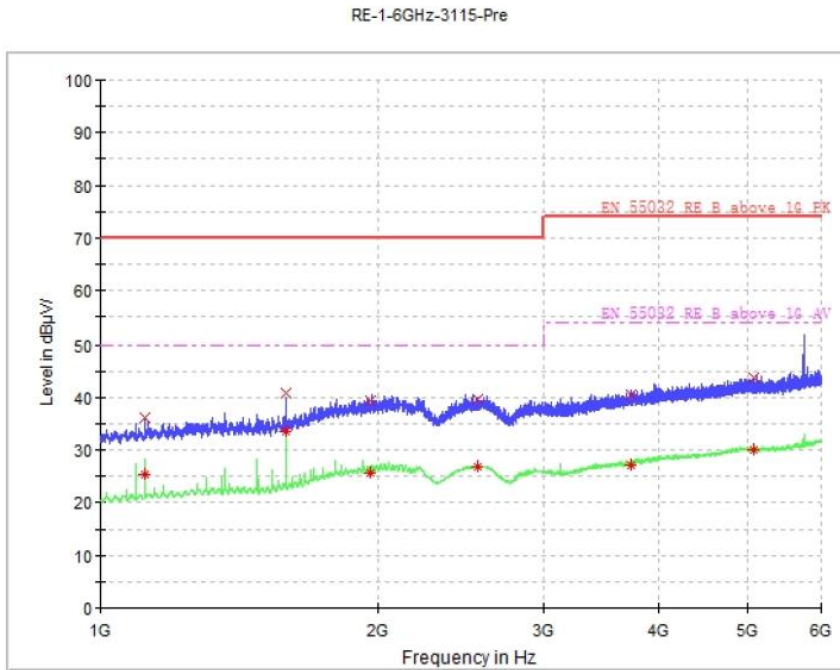

Graphical Results - Horizontal Polarity


PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1118.400000	36.2	1000.0	1000.000	105.0	H	45	-8.5	33.8	70.0
1118.400000	36.2	1000.0	1000.000	100.0	H	89	-8.5	33.8	70.0
1588.800000	40.7	1000.0	1000.000	100.0	H	115	-4.3	29.3	70.0
1959.200000	39.5	1000.0	1000.000	150.0	H	159	-0.2	30.5	70.0
2546.000000	39.7	1000.0	1000.000	110.0	H	209	-0.1	30.3	70.0
3730.400000	40.5	1000.0	1000.000	100.0	H	241	4.0	33.5	74.0
5063.200000	43.8	1000.0	1000.000	100.0	H	286	8.2	30.2	74.0

CAV

Frequency (MHz)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG	Limit - AVG
1118.400000	25.4	1000.0	1000.000	105.0	H	45	-8.5	24.6	50.0
1118.400000	25.4	1000.0	1000.000	100.0	H	89	-8.5	24.6	50.0
1588.800000	33.5	1000.0	1000.000	100.0	H	115	-4.3	16.5	50.0
1959.200000	25.8	1000.0	1000.000	150.0	H	159	-0.2	24.2	50.0
2546.000000	26.7	1000.0	1000.000	110.0	H	209	-0.1	23.3	50.0
3730.400000	27.1	1000.0	1000.000	100.0	H	241	4.0	26.9	54.0
5063.200000	30.0	1000.0	1000.000	100.0	H	286	8.2	24.0	54.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Frequency Range of Test: 1 GHz to 6 GHz (charging mode,110V~/60Hz)

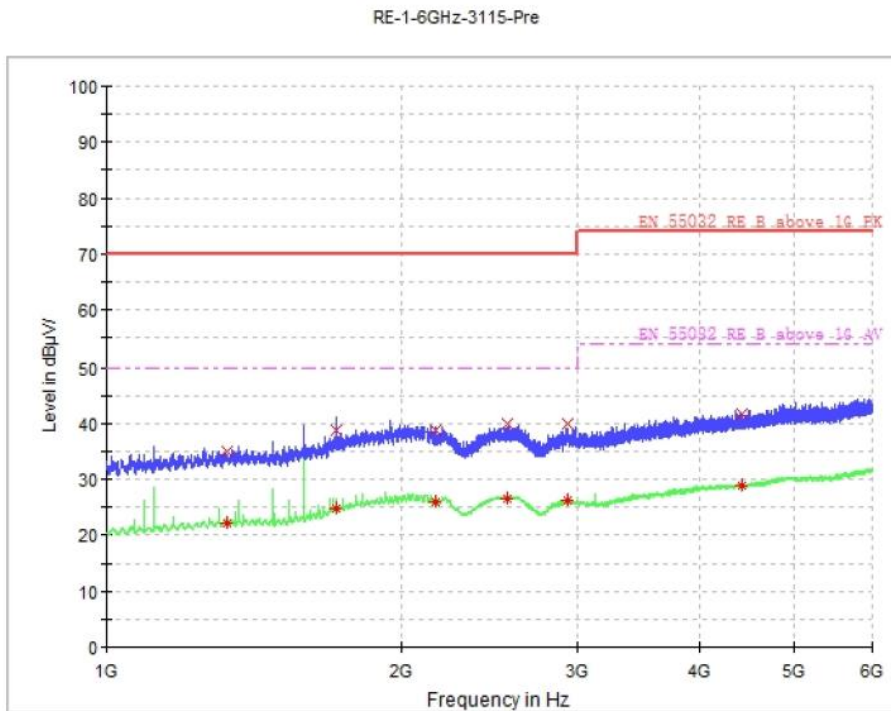

Graphical Results - Vertical Polarity

PK


Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1328.000000	34.9	1000.0	1000.000	100.0	V	112	-6.7	35.1	70.0
1713.200000	38.9	1000.0	1000.000	100.0	V	132	-2.8	31.1	70.0
2154.000000	38.8	1000.0	1000.000	100.0	V	88	0.1	31.2	70.0
2550.000000	39.9	1000.0	1000.000	100.0	V	178	-0.1	30.1	70.0
2941.600000	39.8	1000.0	1000.000	100.0	V	265	0.8	30.2	70.0
4416.000000	41.8	1000.0	1000.000	100.0	V	289	6.3	32.2	74.0

CAV

Frequency (MHz)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG	Limit - AVG
1328.000000	22.0	1000.0	1000.000	100.0	V	112	-6.7	28.0	50.0
1713.200000	24.7	1000.0	1000.000	100.0	V	132	-2.8	25.3	50.0
2154.000000	26.0	1000.0	1000.000	100.0	V	88	0.1	24.0	50.0
2550.000000	26.6	1000.0	1000.000	100.0	V	178	-0.1	23.4	50.0
2941.600000	26.2	1000.0	1000.000	100.0	V	265	0.8	23.8	50.0
4416.000000	29.0	1000.0	1000.000	100.0	V	289	6.3	25.0	54.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Frequency Range of Test: 1 GHz to 6 GHz (charging mode,230V~/50Hz)

RE-1-6GHz-3115-Pre

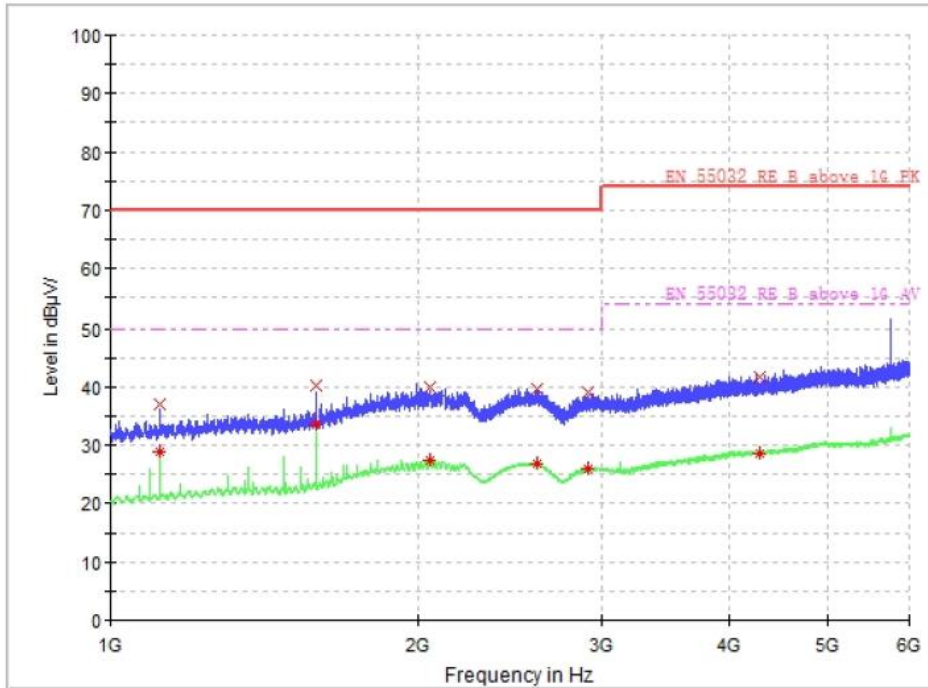

Graphical Results - Horizontal Polarity

PK


Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Poi	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1118.000000	37.1	1000.0	1000.000	105.0	H	123	-8.5	32.9	70.0
1588.800000	40.3	1000.0	1000.000	100.0	H	230	-4.3	29.7	70.0
2054.000000	39.9	1000.0	1000.000	100.0	H	68	0.2	30.1	70.0
2603.200000	39.7	1000.0	1000.000	100.0	H	154	0.0	30.3	70.0
2920.000000	39.0	1000.0	1000.000	115.0	H	333	0.7	31.0	70.0
4287.600000	41.8	1000.0	1000.000	100.0	H	167	6.0	32.2	74.0

CAV

Frequency (MHz)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Poi	Azimuth (deg)	Corr. (dB/m)	Margin - AVG	Limit - AVG
1118.000000	28.8	1000.0	1000.000	105.0	H	123	-8.5	21.2	50.0
1588.800000	33.5	1000.0	1000.000	100.0	H	230	-4.3	16.5	50.0
2054.000000	27.4	1000.0	1000.000	100.0	H	68	0.2	22.6	50.0
2603.200000	26.7	1000.0	1000.000	100.0	H	154	0.0	23.3	50.0
2920.000000	25.9	1000.0	1000.000	115.0	H	333	0.7	24.1	50.0
4287.600000	28.7	1000.0	1000.000	100.0	H	167	6.0	25.3	54.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Frequency Range of Test: 1 GHz to 6 GHz (charging mode,230V~/50Hz)

RE-1-6GHz-3115-Pre

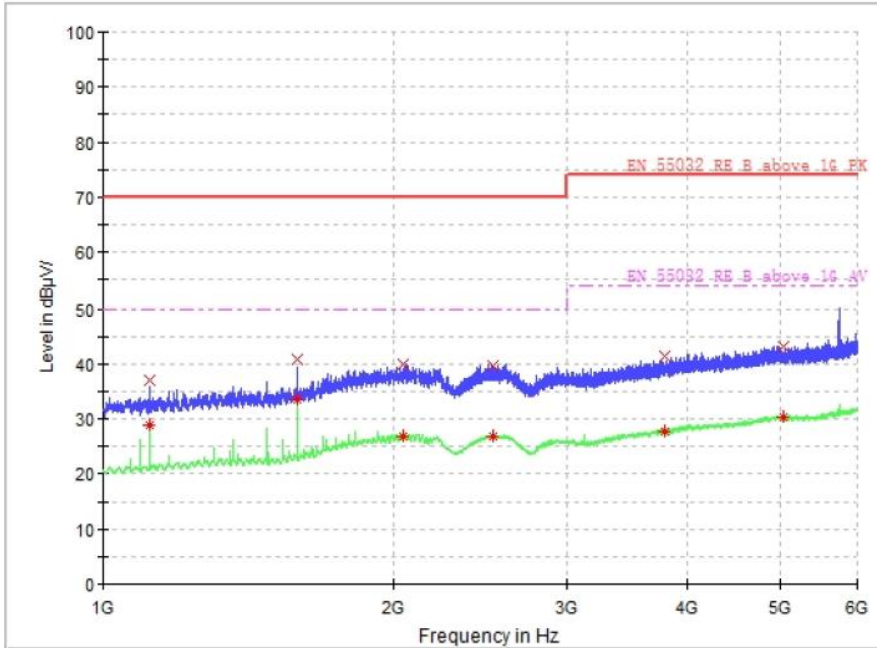

Graphical Results - Vertical Polarity

PK


Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1118.000000	37.1	1000.0	1000.000	100.0	V	35	-8.5	32.9	70.0
1588.800000	40.9	1000.0	1000.000	100.0	V	85	-4.3	29.1	70.0
2046.800000	39.9	1000.0	1000.000	100.0	V	114	0.2	30.2	70.0
2524.400000	39.7	1000.0	1000.000	100.0	V	152	-0.1	30.4	70.0
3794.800000	41.5	1000.0	1000.000	100.0	V	196	4.3	32.5	74.0
5025.600000	43.2	1000.0	1000.000	100.0	V	256	8.2	30.8	74.0

CAV

Frequency (MHz)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG	Limit - AVG
1118.000000	28.7	1000.0	1000.000	100.0	V	35	-8.5	21.3	50.0
1588.800000	33.5	1000.0	1000.000	100.0	V	85	-4.3	16.5	50.0
2046.800000	26.9	1000.0	1000.000	100.0	V	114	0.2	23.1	50.0
2524.400000	26.8	1000.0	1000.000	100.0	V	152	-0.1	23.2	50.0
3794.800000	27.6	1000.0	1000.000	100.0	V	196	4.3	26.4	54.0
5025.600000	30.2	1000.0	1000.000	100.0	V	256	8.2	23.8	54.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Frequency Range of Test: 1 GHz to 6 GHz (running mode,110V~/60Hz)

RE-1-6GHz-3115-Pre

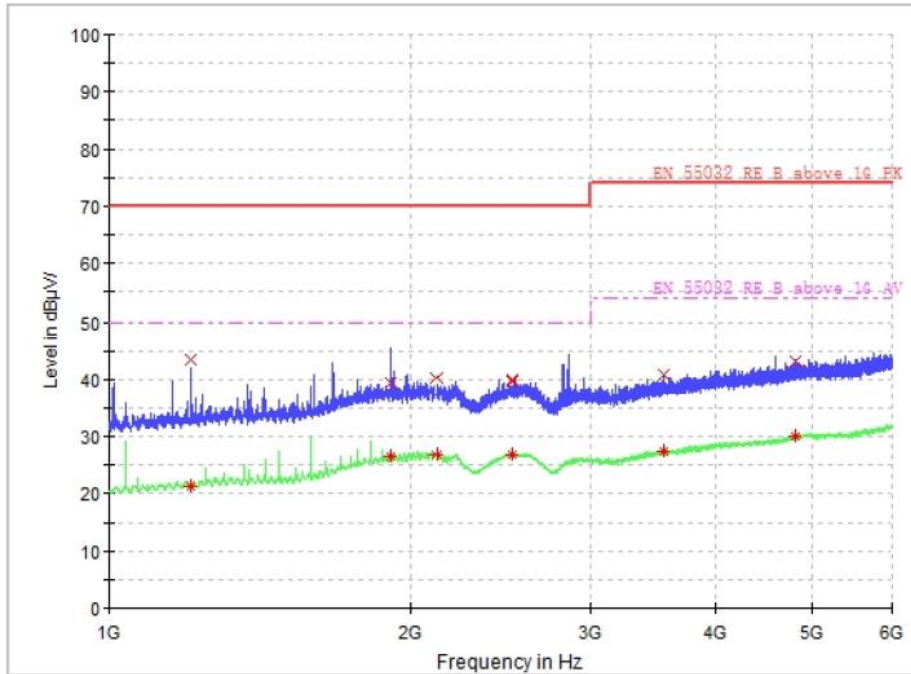

Graphical Results - Horizontal Polarity

PK


Frequency (MHz)	MaxPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1205.600000	43.6	1000.0	1000.000	100.0	H	77	-7.7	26.4	70.0
1904.000000	39.5	1000.0	1000.000	105.0	H	121	-0.8	30.5	70.0
2111.600000	40.3	1000.0	1000.000	150.0	H	147	0.1	29.7	70.0
2514.800000	39.7	1000.0	1000.000	110.0	H	186	-0.2	30.3	70.0
2514.800000	40.0	1000.0	1000.000	100.0	H	254	-0.2	30.0	70.0
3558.800000	40.9	1000.0	1000.000	100.0	H	288	3.2	33.1	74.0
4811.200000	43.0	1000.0	1000.000	100.0	H	342	7.5	31.0	74.0

CAV

Frequency (MHz)	CAverage (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG	Limit - AVG
1205.600000	21.3	1000.0	1000.000	100.0	H	77	-7.7	28.7	50.0
1904.000000	26.5	1000.0	1000.000	105.0	H	121	-0.8	23.5	50.0
2111.600000	26.9	1000.0	1000.000	150.0	H	147	0.1	23.1	50.0
2514.800000	26.7	1000.0	1000.000	110.0	H	186	-0.2	23.3	50.0
2514.800000	26.7	1000.0	1000.000	100.0	H	254	-0.2	23.3	50.0
3558.800000	27.3	1000.0	1000.000	100.0	H	288	3.2	26.7	54.0
4811.200000	30.0	1000.0	1000.000	100.0	H	342	7.5	24.0	54.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Frequency Range of Test: 1 GHz to 6 GHz (running mode,110V~/60Hz)

RE-1-6GHz-3115-Pre

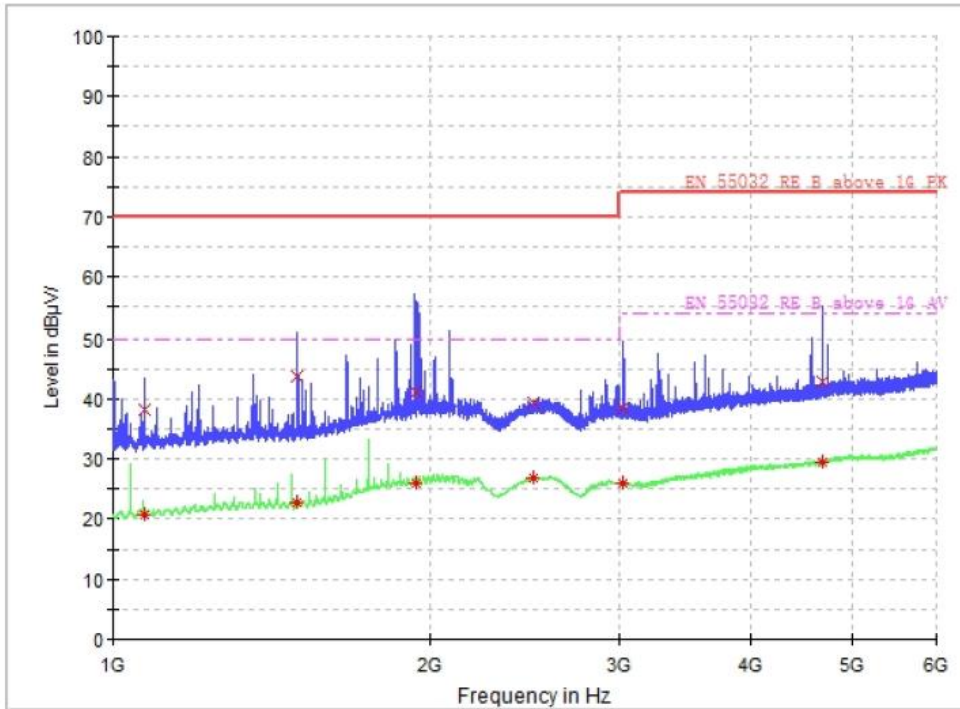

Graphical Results - Vertical Polarity

PK


Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1071.600000	38.3	1000.0	1000.000	100.0	V	75	-8.9	31.7	70.0
1494.400000	43.8	1000.0	1000.000	100.0	V	114	-5.4	26.2	70.0
1938.400000	41.2	1000.0	1000.000	100.0	V	154	-0.4	28.8	70.0
2492.400000	39.4	1000.0	1000.000	100.0	V	179	-0.2	30.6	70.0
3031.200000	38.6	1000.0	1000.000	100.0	V	231	1.0	35.4	74.0
4674.000000	42.7	1000.0	1000.000	100.0	V	276	7.1	31.3	74.0

CAV

Frequency (MHz)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG	Limit - AVG
1071.600000	20.6	1000.0	1000.000	100.0	V	75	-8.9	29.4	50.0
1494.400000	22.7	1000.0	1000.000	100.0	V	114	-5.4	27.3	50.0
1938.400000	25.9	1000.0	1000.000	100.0	V	154	-0.4	24.1	50.0
2492.400000	26.7	1000.0	1000.000	100.0	V	179	-0.2	23.3	50.0
3031.200000	25.9	1000.0	1000.000	100.0	V	231	1.0	28.1	54.0
4674.000000	29.4	1000.0	1000.000	100.0	V	276	7.1	24.6	54.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Frequency Range of Test: 1 GHz to 6 GHz (running mode,230V~/50Hz)

RE-1-6GHz-3115-Pre

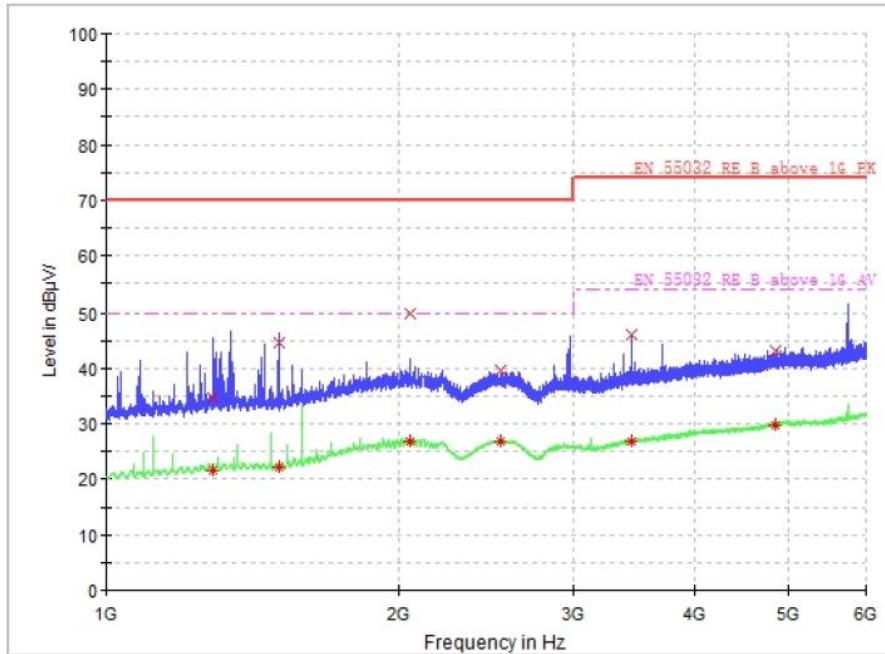

Graphical Results - Horizontal Polarity


PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1285.200000	34.7	1000.0	1000.000	100.0	H	34	-7.1	35.3	70.0
1506.400000	44.6	1000.0	1000.000	122.0	H	111	-5.3	25.4	70.0
2053.200000	49.7	1000.0	1000.000	130.0	H	154	0.2	20.3	70.0
2527.200000	39.6	1000.0	1000.000	100.0	H	213	-0.1	30.4	70.0
3452.400000	46.0	1000.0	1000.000	100.0	H	267	2.7	28.0	74.0
4849.600000	43.1	1000.0	1000.000	100.0	H	318	7.7	30.9	74.0

CAV

Frequency (MHz)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG	Limit - AVG
1285.200000	21.6	1000.0	1000.000	100.0	H	34	-7.1	28.4	50.0
1506.400000	22.1	1000.0	1000.000	122.0	H	111	-5.3	27.9	50.0
2053.200000	26.9	1000.0	1000.000	130.0	H	154	0.2	23.1	50.0
2527.200000	26.8	1000.0	1000.000	100.0	H	213	-0.1	23.2	50.0
3452.400000	26.8	1000.0	1000.000	100.0	H	267	2.7	27.2	54.0
4849.600000	29.8	1000.0	1000.000	100.0	H	318	7.7	24.2	54.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Frequency Range of Test: 1 GHz to 6 GHz (running mode,230V~/50Hz)

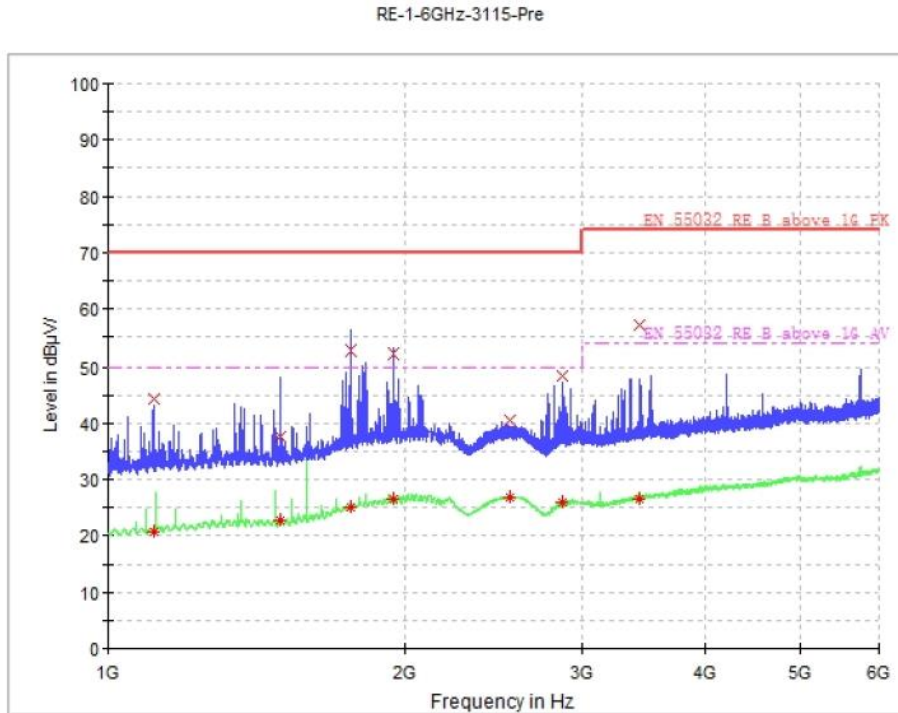

Graphical Results - Vertical Polarity


PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1113.200000	44.3	1000.0	1000.000	100.0	V	110	-8.5	25.7	70.0
1494.800000	37.7	1000.0	1000.000	100.0	V	145	-5.4	32.3	70.0
1760.400000	52.9	1000.0	1000.000	100.0	V	236	-2.3	17.2	70.0
1944.400000	52.3	1000.0	1000.000	100.0	V	261	-0.3	17.7	70.0
2542.400000	40.4	1000.0	1000.000	100.0	V	332	-0.1	29.6	70.0
2872.800000	48.5	1000.0	1000.000	100.0	V	351	0.6	21.5	70.0
3432.400000	57.3	1000.0	1000.000	100.0	V	122	2.6	16.8	74.0

CAV

Frequency (MHz)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG	Limit - AVG
1113.200000	20.7	1000.0	1000.000	100.0	V	110	-8.5	29.3	50.0
1494.800000	22.7	1000.0	1000.000	100.0	V	145	-5.4	27.3	50.0
1760.400000	25.0	1000.0	1000.000	100.0	V	236	-2.3	25.0	50.0
1944.400000	26.7	1000.0	1000.000	100.0	V	261	-0.3	23.3	50.0
2542.400000	26.8	1000.0	1000.000	100.0	V	332	-0.1	23.2	50.0
2872.800000	25.9	1000.0	1000.000	100.0	V	351	0.6	24.1	50.0
3432.400000	26.7	1000.0	1000.000	100.0	V	122	2.6	27.3	54.0

For adaptor: adapter 2_ FY2401500S2, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (charging mode,110V~/60Hz)
 RE-1-6GHz-3115-Pre

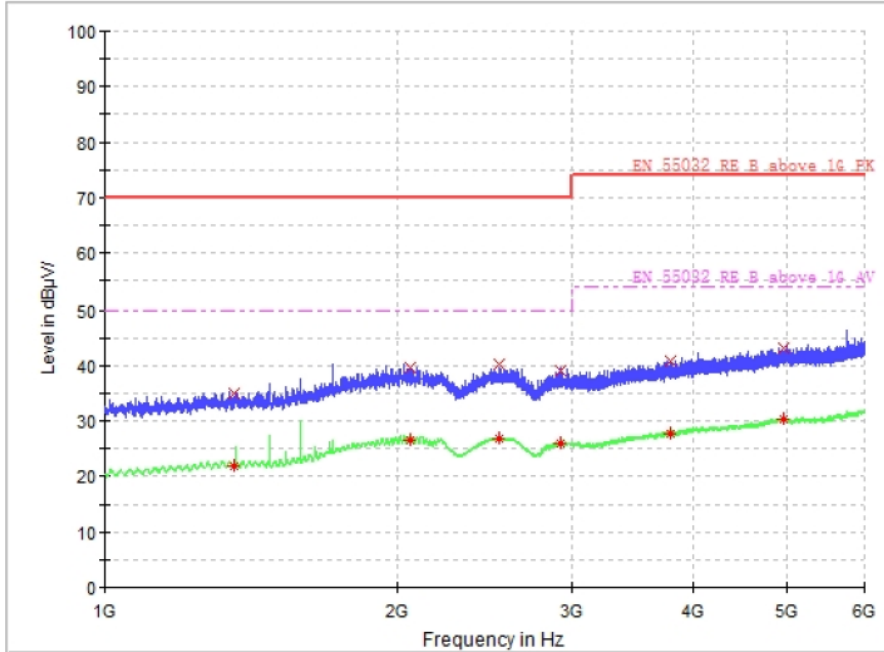

Graphical Results - Horizontal Polarity

PK


Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1357.600000	35.1	1000.0	1000.000	100.0	H	47	-6.5	34.9	70.0
2054.800000	39.7	1000.0	1000.000	100.0	H	144	0.2	30.3	70.0
2530.800000	40.2	1000.0	1000.000	105.0	H	179	-0.1	29.8	70.0
2930.000000	39.0	1000.0	1000.000	110.0	H	211	0.7	31.0	70.0
3794.800000	40.9	1000.0	1000.000	100.0	H	265	4.3	33.1	74.0
4952.800000	43.2	1000.0	1000.000	100.0	H	318	8.0	30.8	74.0

CAV

Frequency (MHz)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - RMS	Limit - RMS
1357.600000	22.0	1000.0	1000.000	100.0	H	47	-6.5	28.0	50.0
2054.800000	26.6	1000.0	1000.000	100.0	H	144	0.2	23.4	50.0
2530.800000	26.8	1000.0	1000.000	105.0	H	179	-0.1	23.2	50.0
2930.000000	25.9	1000.0	1000.000	110.0	H	211	0.7	24.1	50.0
3794.800000	27.6	1000.0	1000.000	100.0	H	265	4.3	26.4	54.0
4952.800000	30.3	1000.0	1000.000	100.0	H	318	8.0	23.7	54.0

For adaptor: adapter 2_ FY2401500S2, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (charging mode,110V~/60Hz)

RE-1-6GHz-3115-Pre

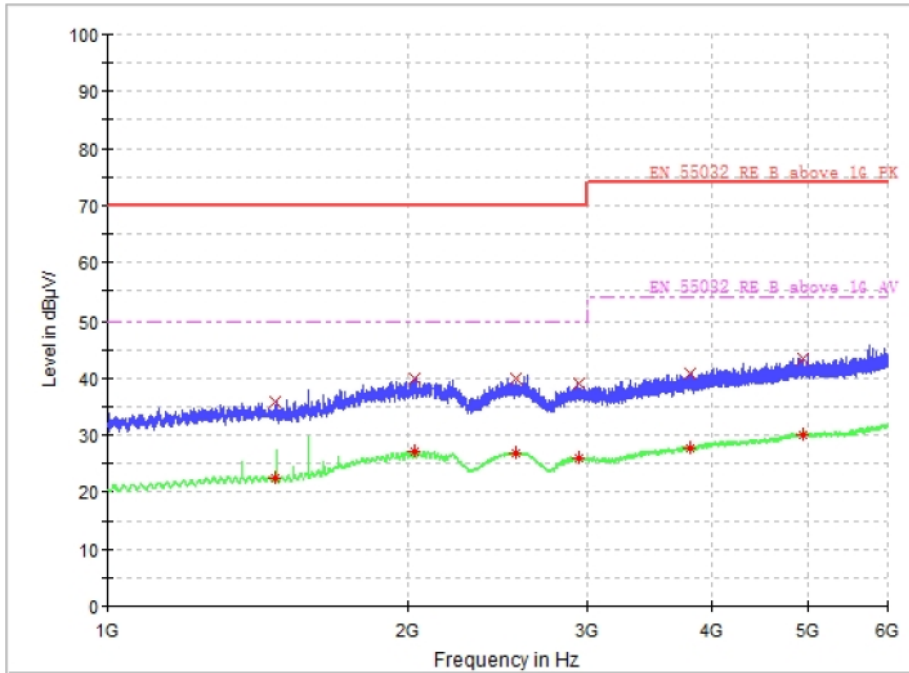

Graphical Results - Vertical Polarity

PK


Frequency (MHz)	MaxPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1473.200000	35.7	1000.0	1000.000	100.0	V	32	-5.6	34.3	70.0
2030.400000	40.0	1000.0	1000.000	100.0	V	73	0.2	30.0	70.0
2551.200000	39.9	1000.0	1000.000	100.0	V	134	-0.1	30.1	70.0
2948.800000	39.2	1000.0	1000.000	100.0	V	165	0.8	30.8	70.0
3814.400000	40.9	1000.0	1000.000	100.0	V	254	4.4	33.1	74.0
4934.400000	43.3	1000.0	1000.000	100.0	V	288	7.9	30.7	74.0

CAV

Frequency (MHz)	CAverage (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG	Limit - AVG
1473.200000	22.4	1000.0	1000.000	100.0	V	32	-5.6	27.6	50.0
2030.400000	27.2	1000.0	1000.000	100.0	V	73	0.2	22.8	50.0
2551.200000	26.7	1000.0	1000.000	100.0	V	134	-0.1	23.3	50.0
2948.800000	25.8	1000.0	1000.000	100.0	V	165	0.8	24.2	50.0
3814.400000	27.8	1000.0	1000.000	100.0	V	254	4.4	26.2	54.0
4934.400000	30.2	1000.0	1000.000	100.0	V	288	7.9	23.8	54.0

For adaptor: adapter 2_ FY2401500S2, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (charging mode,230V~/50Hz)

RE-1-6GHz-3115-Pre

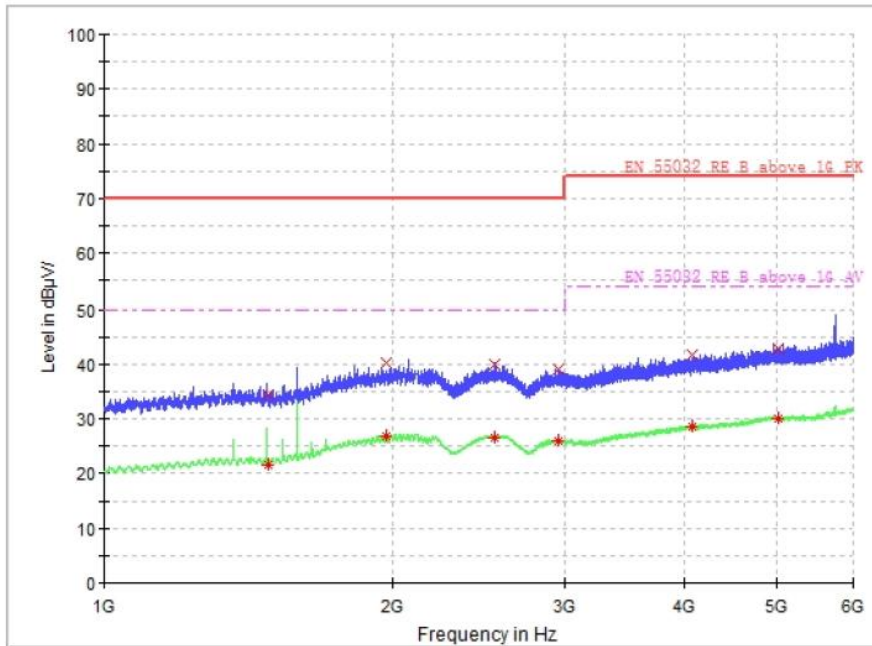

Graphical Results - Horizontal Polarity

PK


Frequency (MHz)	MaxPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1483.600000	34.5	1000.0	1000.000	105.0	H	142	-5.5	35.5	70.0
1967.600000	40.2	1000.0	1000.000	100.0	H	164	-0.1	29.8	70.0
2536.400000	40.1	1000.0	1000.000	110.0	H	88	-0.1	29.9	70.0
2962.400000	39.0	1000.0	1000.000	150.0	H	254	0.8	31.0	70.0
4076.000000	41.7	1000.0	1000.000	100.0	H	287	5.5	32.3	74.0
5009.200000	42.7	1000.0	1000.000	100.0	H	309	8.2	31.3	74.0

CAV

Frequency (MHz)	CAverage (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG	Limit - AVG
1483.600000	21.7	1000.0	1000.000	105.0	H	142	-5.5	28.3	50.0
1967.600000	26.9	1000.0	1000.000	100.0	H	164	-0.1	23.1	50.0
2536.400000	26.7	1000.0	1000.000	110.0	H	88	-0.1	23.3	50.0
2962.400000	25.9	1000.0	1000.000	150.0	H	254	0.8	24.1	50.0
4076.000000	28.7	1000.0	1000.000	100.0	H	287	5.5	25.3	54.0
5009.200000	30.0	1000.0	1000.000	100.0	H	309	8.2	24.0	54.0

For adaptor: adapter 2_ FY2401500S2, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (charging mode,230V~/50Hz)

RE-1-6GHz-3115-Pre

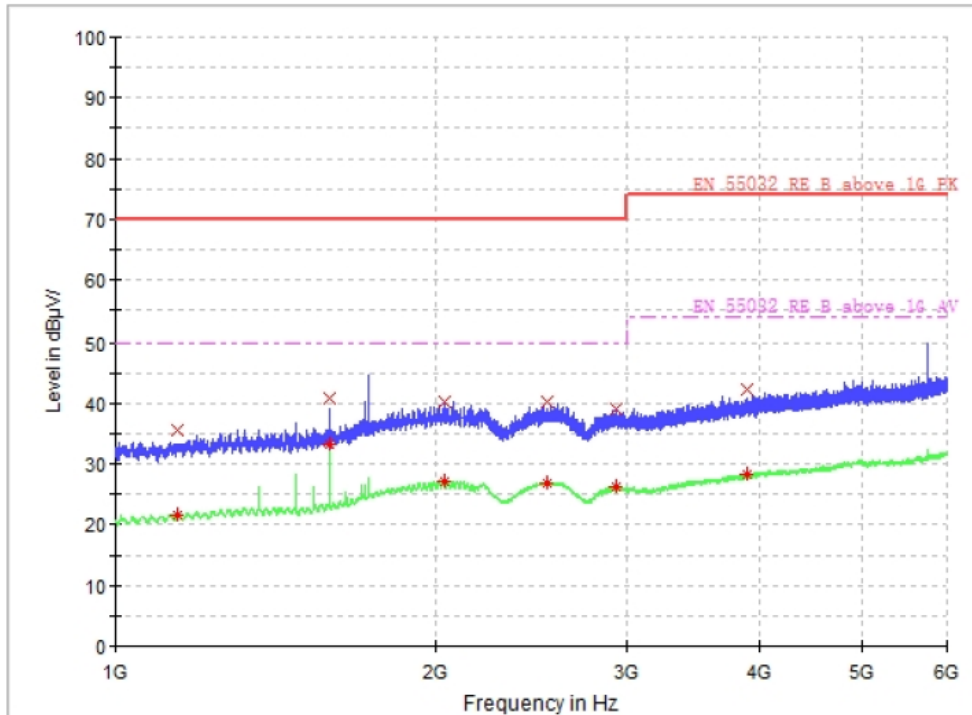

Graphical Results - Vertical Polarity


PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1144.400000	35.5	1000.0	1000.000	100.0	V	133	-8.3	34.5	70.0
1588.800000	40.8	1000.0	1000.000	100.0	V	156	-4.3	29.2	70.0
2031.600000	40.2	1000.0	1000.000	100.0	V	187	0.2	29.8	70.0
2532.800000	40.1	1000.0	1000.000	100.0	V	231	-0.1	29.9	70.0
2938.000000	39.1	1000.0	1000.000	100.0	V	277	0.8	30.9	70.0
3895.200000	42.3	1000.0	1000.000	100.0	V	332	4.8	31.7	74.0

CAV

Frequency (MHz)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG	Limit - AVG
1144.400000	21.5	1000.0	1000.000	100.0	V	133	-8.3	28.5	50.0
1588.800000	33.1	1000.0	1000.000	100.0	V	156	-4.3	16.9	50.0
2031.600000	27.1	1000.0	1000.000	100.0	V	187	0.2	22.9	50.0
2532.800000	26.8	1000.0	1000.000	100.0	V	231	-0.1	23.2	50.0
2938.000000	26.3	1000.0	1000.000	100.0	V	277	0.8	23.7	50.0
3895.200000	28.3	1000.0	1000.000	100.0	V	332	4.8	25.7	54.0

For adaptor: adapter 2_ FY2401500S2, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (running mode,110V~/60Hz)

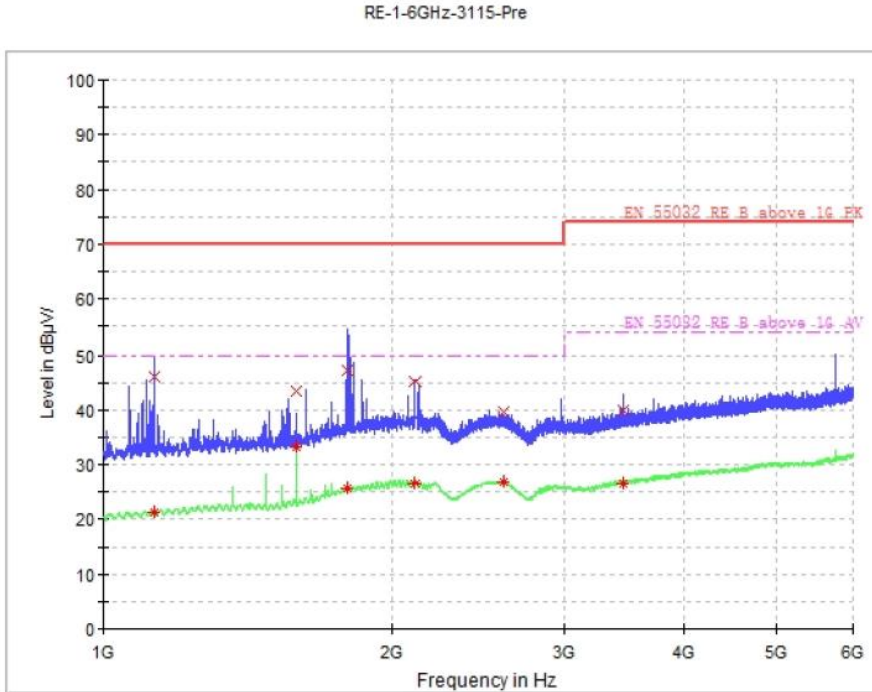

Graphical Results - Horizontal Polarity

PK


Frequency (MHz)	MaxPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1130.400000	46.1	1000.0	1000.000	100.0	H	75	-8.4	23.9	70.0
1588.800000	43.4	1000.0	1000.000	110.0	H	132	-4.3	26.6	70.0
1794.400000	47.1	1000.0	1000.000	100.0	H	162	-1.9	22.9	70.0
2105.600000	45.2	1000.0	1000.000	100.0	H	237	0.1	24.8	70.0
2600.400000	39.7	1000.0	1000.000	105.0	H	274	0.0	30.3	70.0
3457.200000	39.9	1000.0	1000.000	100.0	H	331	2.7	34.1	74.0

CAV

Frequency (MHz)	CAverage (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG	Limit - AVG
1130.400000	21.2	1000.0	1000.000	100.0	H	75	-8.4	28.8	50.0
1588.800000	33.1	1000.0	1000.000	110.0	H	132	-4.3	16.9	50.0
1794.400000	25.5	1000.0	1000.000	100.0	H	162	-1.9	24.5	50.0
2105.600000	26.6	1000.0	1000.000	100.0	H	237	0.1	23.4	50.0
2600.400000	26.7	1000.0	1000.000	105.0	H	274	0.0	23.3	50.0
3457.200000	26.5	1000.0	1000.000	100.0	H	331	2.7	27.5	54.0

For adaptor: adapter 2_ FY2401500S2, BLE mode

Frequency Range of Test: 1 GHz to 6 GHz (running mode,110V~/60Hz)

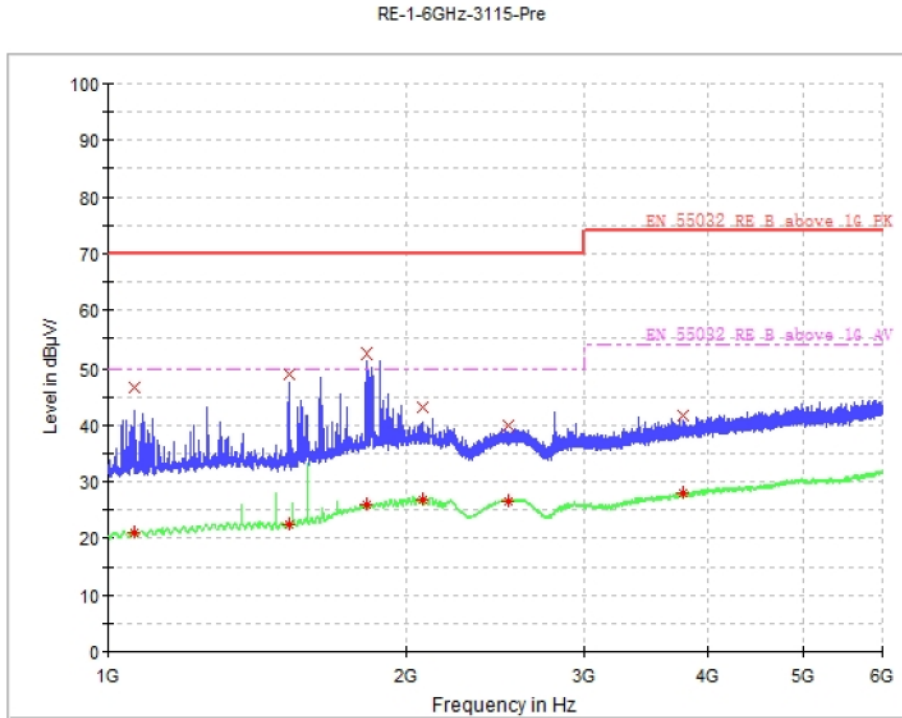

Graphical Results - Vertical Polarity


PK

Frequency (MHz)	MaxPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1064.000000	46.5	1000.0	1000.000	100.0	V	54	-9.0	23.5	70.0
1520.000000	48.8	1000.0	1000.000	100.0	V	135	-5.1	21.2	70.0
1818.800000	52.4	1000.0	1000.000	100.0	V	164	-1.7	17.6	70.0
2072.800000	43.2	1000.0	1000.000	100.0	V	322	0.2	26.8	70.0
2521.200000	39.8	1000.0	1000.000	100.0	V	267	-0.1	30.2	70.0
3784.400000	41.6	1000.0	1000.000	100.0	V	26	4.3	32.4	74.0

CAV

Frequency (MHz)	CAverage (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG	Limit - AVG
1064.000000	21.1	1000.0	1000.000	100.0	V	54	-9.0	28.9	50.0
1520.000000	22.4	1000.0	1000.000	100.0	V	135	-5.1	27.6	50.0
1818.800000	25.9	1000.0	1000.000	100.0	V	164	-1.7	24.1	50.0
2072.800000	26.9	1000.0	1000.000	100.0	V	322	0.2	23.1	50.0
2521.200000	26.6	1000.0	1000.000	100.0	V	267	-0.1	23.4	50.0
3784.400000	28.1	1000.0	1000.000	100.0	V	26	4.3	25.9	54.0

For adaptor: adapter 2_ FY2401500S2, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (running mode,230V~/50Hz)

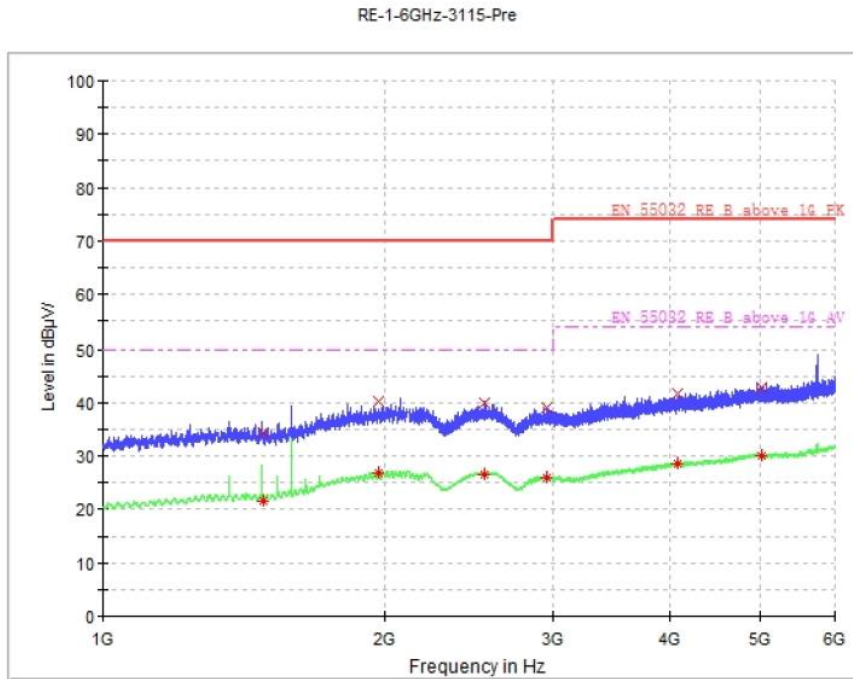

Graphical Results - Horizontal Polarity

PK


Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1483.600000	34.5	1000.0	1000.000	105.0	H	142	-5.5	35.5	70.0
1967.600000	40.2	1000.0	1000.000	100.0	H	164	-0.1	29.8	70.0
2536.400000	40.1	1000.0	1000.000	110.0	H	88	-0.1	29.9	70.0
2962.400000	39.0	1000.0	1000.000	150.0	H	254	0.8	31.0	70.0
4076.000000	41.7	1000.0	1000.000	100.0	H	287	5.5	32.3	74.0
5009.200000	42.7	1000.0	1000.000	100.0	H	309	8.2	31.3	74.0

CAV

Frequency (MHz)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG	Limit - AVG
1483.600000	21.7	1000.0	1000.000	105.0	H	142	-5.5	28.3	50.0
1967.600000	26.9	1000.0	1000.000	100.0	H	164	-0.1	23.1	50.0
2536.400000	26.7	1000.0	1000.000	110.0	H	88	-0.1	23.3	50.0
2962.400000	25.9	1000.0	1000.000	150.0	H	254	0.8	24.1	50.0
4076.000000	28.7	1000.0	1000.000	100.0	H	287	5.5	25.3	54.0
5009.200000	30.0	1000.0	1000.000	100.0	H	309	8.2	24.0	54.0

For adaptor: adapter 2_ FY2401500S2, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (running mode,230V~/50Hz)

RE-1-6GHz-3115-Pre

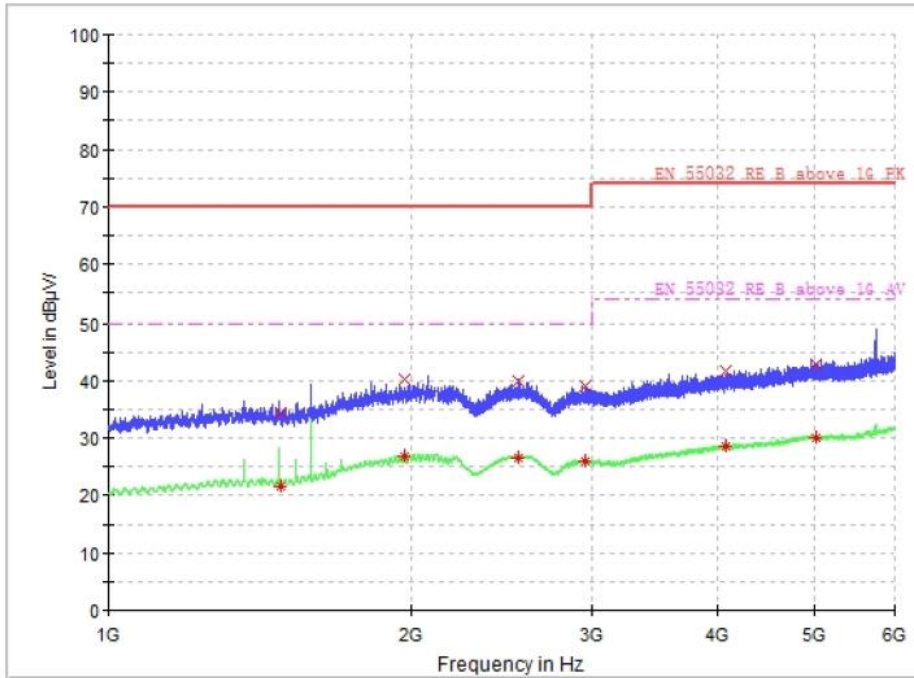

Graphical Results - Vertical Polarity


PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+	Limit - PK+
1064.000000	46.5	1000.0	1000.000	100.0	V	54	-9.0	23.5	70.0
1520.000000	48.8	1000.0	1000.000	100.0	V	135	-5.1	21.2	70.0
1818.800000	52.4	1000.0	1000.000	100.0	V	164	-1.7	17.6	70.0
2072.800000	43.2	1000.0	1000.000	100.0	V	322	0.2	26.8	70.0
2521.200000	39.8	1000.0	1000.000	100.0	V	267	-0.1	30.2	70.0
3784.400000	41.6	1000.0	1000.000	100.0	V	26	4.3	32.4	74.0

CAV

Frequency (MHz)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG	Limit - AVG
1064.000000	21.1	1000.0	1000.000	100.0	V	54	-9.0	28.9	50.0
1520.000000	22.4	1000.0	1000.000	100.0	V	135	-5.1	27.6	50.0
1818.800000	25.9	1000.0	1000.000	100.0	V	164	-1.7	24.1	50.0
2072.800000	26.9	1000.0	1000.000	100.0	V	322	0.2	23.1	50.0
2521.200000	26.6	1000.0	1000.000	100.0	V	267	-0.1	23.4	50.0
3784.400000	28.1	1000.0	1000.000	100.0	V	26	4.3	25.9	54.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Frequency Range of Test: 1 GHz to 6 GHz (charging mode, 110V~/60Hz)
 RE-1-6GHz-3115-Pre

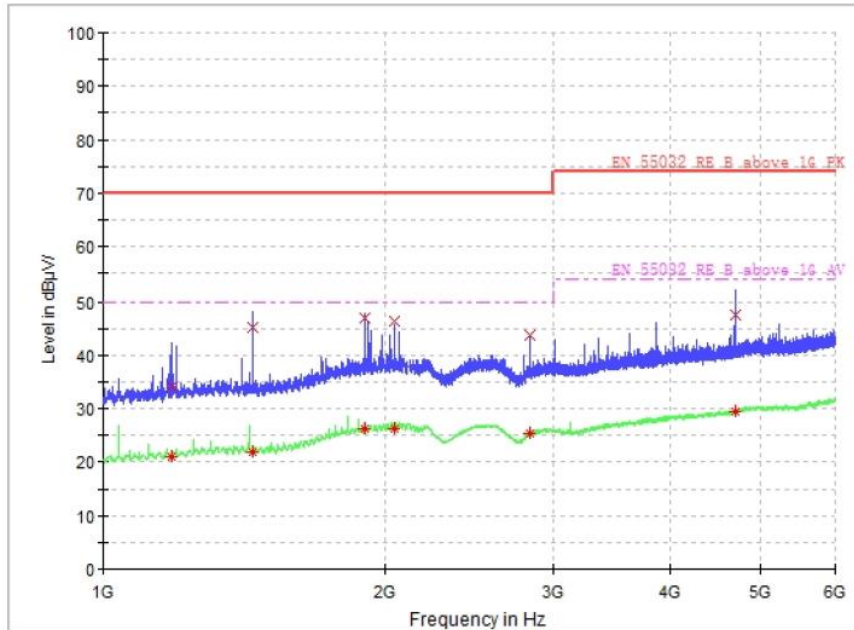

Graphical Results - Horizontal Polarity

Limit and Margin PK


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Poi	Margin - PK+	Limit - PK+
1180.800000	34.1	21.0	1000.0	1000.000	155.0	H	35.9	70.0
1442.000000	45.1	22.0	1000.0	1000.000	155.0	H	24.9	70.0
1898.400000	46.9	26.3	1000.0	1000.000	155.0	H	23.1	70.0
2042.000000	46.4	26.3	1000.0	1000.000	155.0	H	23.6	70.0
2839.200000	43.8	25.2	1000.0	1000.000	155.0	H	26.2	70.0
4690.400000	47.6	29.5	1000.0	1000.000	155.0	H	26.4	74.0

Limit and Margin CAV

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Poi	Margin - CAV	Limit - CAV
1180.800000	34.1	21.0	1000.0	1000.000	155.0	H	29.0	50.0
1442.000000	45.1	22.0	1000.0	1000.000	155.0	H	28.0	50.0
1898.400000	46.9	26.3	1000.0	1000.000	155.0	H	23.7	50.0
2042.000000	46.4	26.3	1000.0	1000.000	155.0	H	23.7	50.0
2839.200000	43.8	25.2	1000.0	1000.000	155.0	H	24.8	50.0
4690.400000	47.6	29.5	1000.0	1000.000	155.0	H	24.5	54.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Frequency Range of Test: 1 GHz to 6 GHz (charging mode,110V~/60Hz)

RE-1-6GHz-3115-Pre

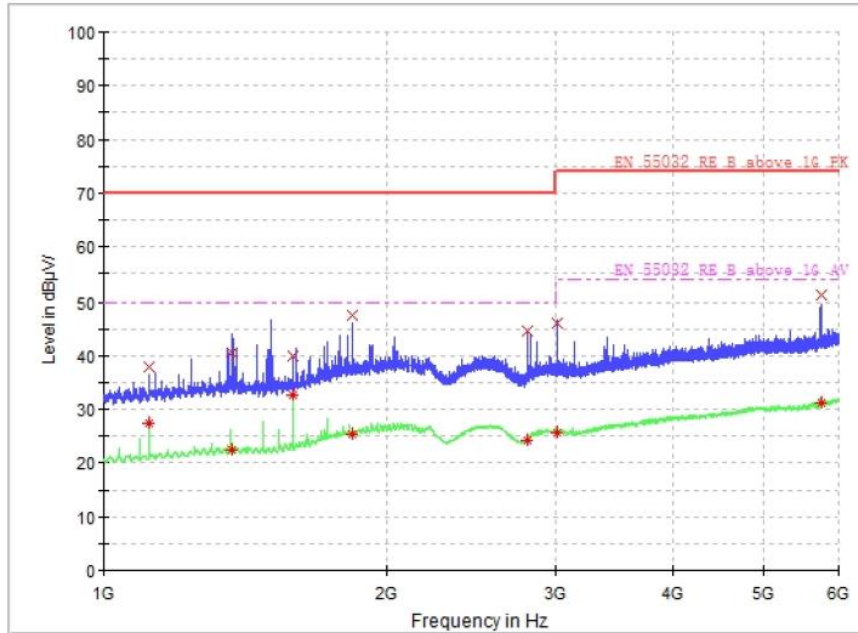

Graphical Results - Vertical Polarity


Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - PK+	Limit - PK+
1118.000000	38.0	27.4	1000.0	1000.000	155.0	V	32.0	70.0
1366.800000	40.6	22.5	1000.0	1000.000	155.0	V	29.4	70.0
1588.800000	40.1	32.7	1000.0	1000.000	155.0	V	29.9	70.0
1833.600000	47.5	25.5	1000.0	1000.000	155.0	V	22.5	70.0
2801.200000	44.6	24.3	1000.0	1000.000	155.0	V	25.4	70.0
3020.800000	46.1	25.8	1000.0	1000.000	155.0	V	27.9	74.0
5742.800000	51.4	31.1	1000.0	1000.000	155.0	V	22.6	74.0

Limit and Margin CAV

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - CAV	Limit - CAV
1118.000000	38.0	27.4	1000.0	1000.000	155.0	V	22.6	50.0
1366.800000	40.6	22.5	1000.0	1000.000	155.0	V	27.5	50.0
1588.800000	40.1	32.7	1000.0	1000.000	155.0	V	17.3	50.0
1833.600000	47.5	25.5	1000.0	1000.000	155.0	V	24.6	50.0
2801.200000	44.6	24.3	1000.0	1000.000	155.0	V	25.7	50.0
3020.800000	46.1	25.8	1000.0	1000.000	155.0	V	28.2	54.0
5742.800000	51.4	31.1	1000.0	1000.000	155.0	V	22.9	54.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Frequency Range of Test: 1 GHz to 6 GHz (charging mode,230V~/50Hz)

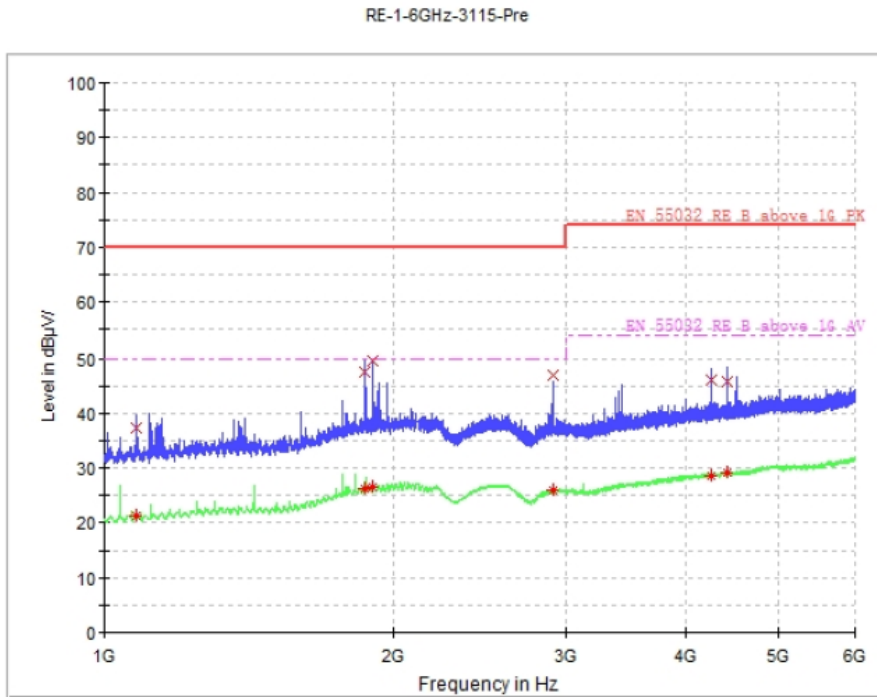

Graphical Results - Horizontal Polarity

Limit and Margin PK


Frequency (MHz)	MaxPeak (dB μ V/m)	CAverage (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - PK+	Limit - PK+
1078.400000	37.2	21.2	1000.0	1000.000	155.0	H	32.8	70.0
1863.200000	47.6	26.1	1000.0	1000.000	155.0	H	22.4	70.0
1902.800000	49.6	26.5	1000.0	1000.000	155.0	H	20.4	70.0
2914.000000	46.9	25.9	1000.0	1000.000	155.0	H	23.1	70.0
4254.800000	46.1	28.6	1000.0	1000.000	155.0	H	27.9	74.0
4415.600000	45.8	29.0	1000.0	1000.000	155.0	H	28.2	74.0

Limit and Margin CAV

Frequency (MHz)	MaxPeak (dB μ V/m)	CAverage (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - CAV	Limit - CAV
1078.400000	37.2	21.2	1000.0	1000.000	155.0	H	28.8	50.0
1863.200000	47.6	26.1	1000.0	1000.000	155.0	H	23.9	50.0
1902.800000	49.6	26.5	1000.0	1000.000	155.0	H	23.5	50.0
2914.000000	46.9	25.9	1000.0	1000.000	155.0	H	24.1	50.0
4254.800000	46.1	28.6	1000.0	1000.000	155.0	H	25.4	54.0
4415.600000	45.8	29.0	1000.0	1000.000	155.0	H	25.0	54.0

For adaptor: adaptor 2_ FY2401500S2, Wi-Fi mode
 Frequency Range of Test: 1 GHz to 6 GHz (charging mode,230V~/50Hz)

RE-1-6GHz-3115-Pre

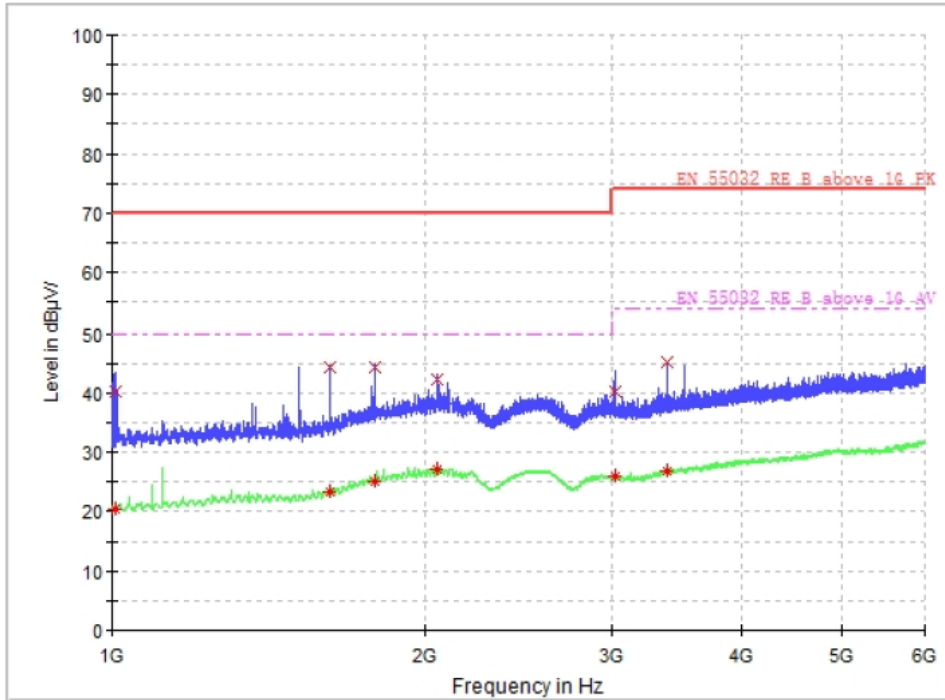

Graphical Results - Vertical Polarity


Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - PK+	Limit - PK+
1007.600000	40.3	20.3	1000.0	1000.000	155.0	V	29.7	70.0
1619.600000	44.2	23.5	1000.0	1000.000	155.0	V	25.8	70.0
1785.200000	44.3	25.1	1000.0	1000.000	155.0	V	25.7	70.0
2052.800000	42.4	27.0	1000.0	1000.000	155.0	V	27.6	70.0
3025.200000	40.3	25.9	1000.0	1000.000	155.0	V	33.7	74.0
3399.600000	45.2	26.9	1000.0	1000.000	155.0	V	28.8	74.0

Limit and Margin CAV

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - CAV	Limit - CAV
1007.600000	40.3	20.3	1000.0	1000.000	155.0	V	29.7	50.0
1619.600000	44.2	23.5	1000.0	1000.000	155.0	V	26.6	50.0
1785.200000	44.3	25.1	1000.0	1000.000	155.0	V	25.0	50.0
2052.800000	42.4	27.0	1000.0	1000.000	155.0	V	23.0	50.0
3025.200000	40.3	25.9	1000.0	1000.000	155.0	V	28.1	54.0
3399.600000	45.2	26.9	1000.0	1000.000	155.0	V	27.1	54.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Frequency Range of Test: 1 GHz to 6 GHz (running mode,110V~/60Hz)

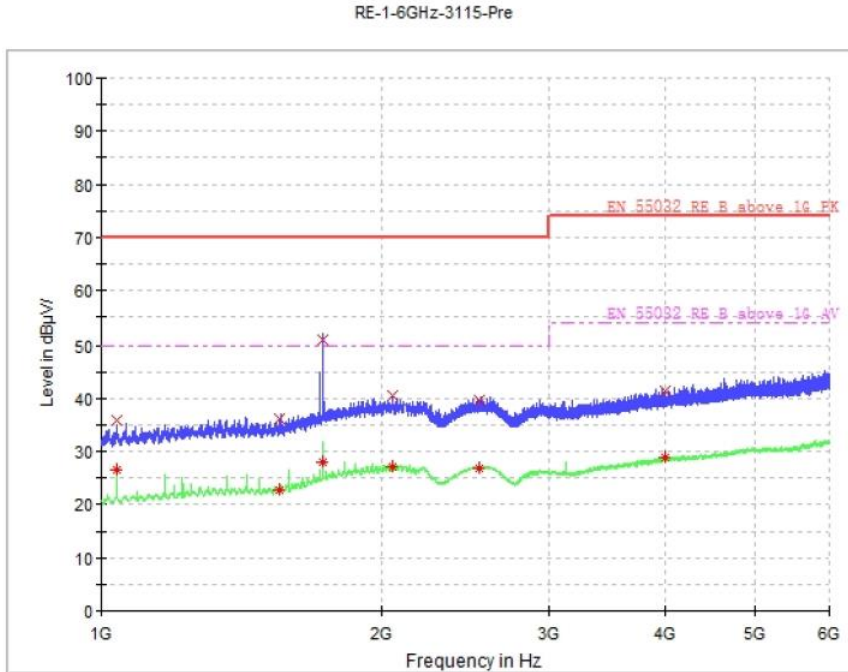

Graphical Results - Horizontal Polarity

Limit and Margin PK


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - PK+	Limit - PK+
1040.000000	36.0	26.6	1000.0	1000.000	155.0	H	34.0	70.0
1554.000000	36.3	22.8	1000.0	1000.000	155.0	H	33.7	70.0
1728.400000	51.0	27.9	1000.0	1000.000	155.0	H	19.0	70.0
2047.600000	40.4	27.2	1000.0	1000.000	155.0	H	29.6	70.0
2529.200000	39.8	26.9	1000.0	1000.000	155.0	H	30.2	70.0
4007.200000	41.5	28.8	1000.0	1000.000	155.0	H	32.5	74.0

Limit and Margin CAV

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - CAV	Limit - CAV
1040.000000	36.0	26.6	1000.0	1000.000	155.0	H	23.5	50.0
1554.000000	36.3	22.8	1000.0	1000.000	155.0	H	27.2	50.0
1728.400000	51.0	27.9	1000.0	1000.000	155.0	H	22.1	50.0
2047.600000	40.4	27.2	1000.0	1000.000	155.0	H	22.8	50.0
2529.200000	39.8	26.9	1000.0	1000.000	155.0	H	23.2	50.0
4007.200000	41.5	28.8	1000.0	1000.000	155.0	H	25.2	54.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Frequency Range of Test: 1 GHz to 6 GHz (running mode,110V~/60Hz)

RE-1-6GHz-3115-Pre

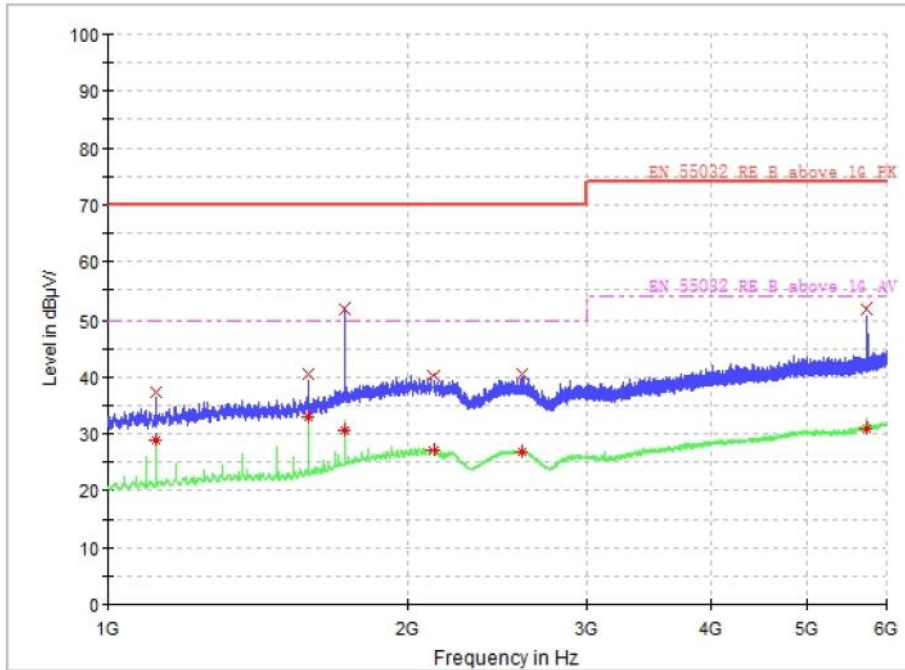

Graphical Results - Vertical Polarity

Limit and Margin PK


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - PK+	Limit - PK+
1118.000000	37.4	28.7	1000.0	1000.000	155.0	V	32.6	70.0
1588.800000	40.4	32.9	1000.0	1000.000	155.0	V	29.6	70.0
1729.200000	51.8	30.7	1000.0	1000.000	155.0	V	18.2	70.0
2111.600000	40.3	27.0	1000.0	1000.000	155.0	V	29.7	70.0
2590.800000	40.6	26.9	1000.0	1000.000	155.0	V	29.4	70.0
5742.000000	51.9	30.9	1000.0	1000.000	155.0	V	22.1	74.0

Limit and Margin CAV

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - CAV	Limit - CAV
1118.000000	37.4	28.7	1000.0	1000.000	155.0	V	21.3	50.0
1588.800000	40.4	32.9	1000.0	1000.000	155.0	V	17.1	50.0
1729.200000	59.4	30.7	1000.0	1000.000	155.0	V	19.3	50.0
2111.600000	40.3	27.0	1000.0	1000.000	155.0	V	23.0	50.0
2590.800000	40.6	26.9	1000.0	1000.000	155.0	V	23.1	50.0
5742.000000	51.9	30.9	1000.0	1000.000	155.0	V	23.1	54.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Frequency Range of Test: 1 GHz to 6 GHz (running mode,230V~/50Hz)

RE-1-6GHz-3115-Pre

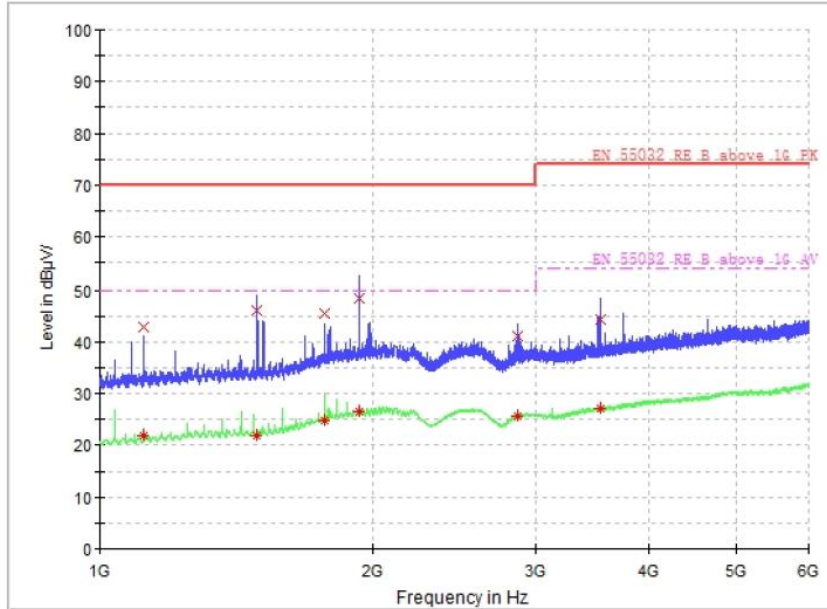

Graphical Results - Horizontal Polarity

Limit and Margin PK


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - PK+	Limit - PK+
1118.400000	42.9	22.0	1000.0	1000.000	155.0	H	27.1	70.0
1487.600000	46.0	22.0	1000.0	1000.000	155.0	H	24.0	70.0
1766.400000	45.5	24.9	1000.0	1000.000	155.0	H	24.5	70.0
1928.000000	48.3	26.7	1000.0	1000.000	155.0	H	21.7	70.0
2869.600000	41.2	25.6	1000.0	1000.000	155.0	H	28.8	70.0
3535.600000	44.5	27.1	1000.0	1000.000	155.0	H	29.6	74.0

Limit and Margin CAV

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - CAV	Limit - CAV
1118.400000	42.9	22.0	1000.0	1000.000	155.0	H	28.0	50.0
1487.600000	46.0	22.0	1000.0	1000.000	155.0	H	28.0	50.0
1766.400000	45.5	24.9	1000.0	1000.000	155.0	H	25.1	50.0
1928.000000	48.3	26.7	1000.0	1000.000	155.0	H	23.3	50.0
2869.600000	41.2	25.6	1000.0	1000.000	155.0	H	24.4	50.0
3535.600000	44.5	27.1	1000.0	1000.000	155.0	H	26.9	54.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Frequency Range of Test: 1 GHz to 6 GHz (running mode,230V~/50Hz)

RE-1-6GHz-3115-Pre

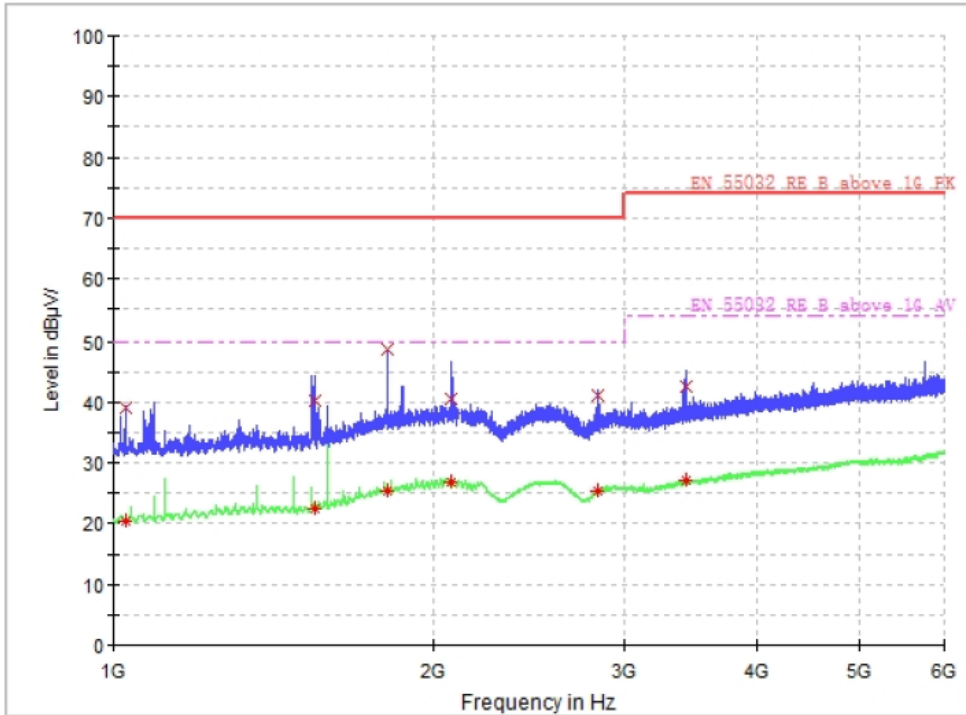

Graphical Results - Vertical Polarity


Limit and Margin PK

Frequency (MHz)	MaxPeak (dB V/m)	CAverage (dB V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - PK+	Limit - PK+
1025.200000	39.0	20.3	1000.0	1000.000	155.0	V	31.0	70.0
1543.200000	40.3	22.5	1000.0	1000.000	155.0	V	29.7	70.0
1807.600000	48.7	25.3	1000.0	1000.000	155.0	V	21.3	70.0
2074.000000	40.4	26.9	1000.0	1000.000	155.0	V	29.6	70.0
2833.600000	41.2	25.5	1000.0	1000.000	155.0	V	28.8	70.0
3428.400000	42.5	27.0	1000.0	1000.000	155.0	V	31.5	74.0

Limit and Margin CAV

Frequency (MHz)	MaxPeak (dB V/m)	CAverage (dB V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Margin - CAV	Limit - CAV
1025.200000	39.0	20.3	1000.0	1000.000	155.0	V	29.7	50.0
1543.200000	40.3	22.5	1000.0	1000.000	155.0	V	27.5	50.0
1807.600000	48.7	25.3	1000.0	1000.000	155.0	V	24.7	50.0
2074.000000	40.4	26.9	1000.0	1000.000	155.0	V	23.1	50.0
2833.600000	41.2	25.5	1000.0	1000.000	155.0	V	24.5	50.0
3428.400000	42.5	27.0	1000.0	1000.000	155.0	V	27.0	54.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (charging mode, 110V~/60Hz)

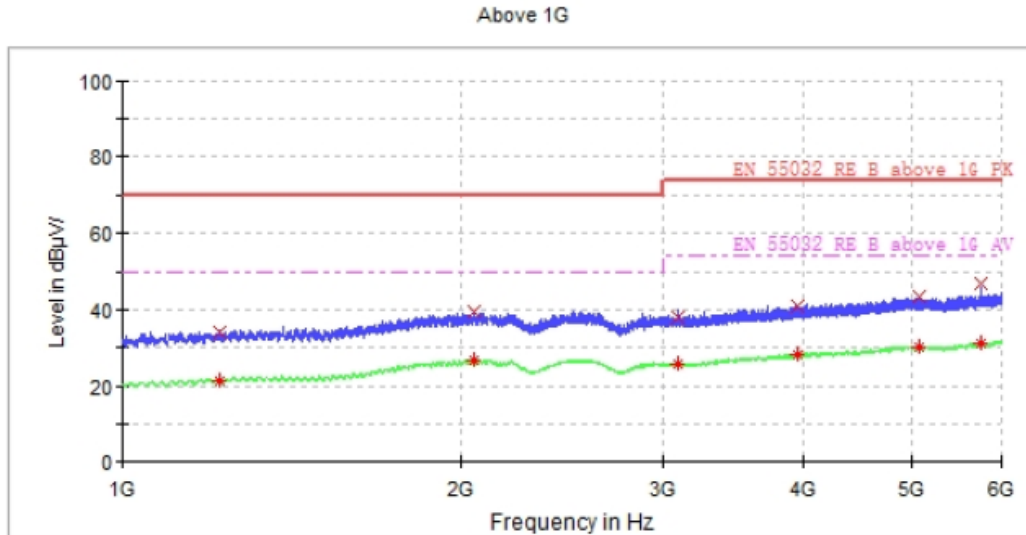

Graphical Results - Horizontal Polarity


PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1219.200000	34.0	5.0	1000.000	-7.6	36.0	70.0
2048.000000	39.6	5.0	1000.000	0.2	30.4	70.0
3094.000000	38.3	5.0	1000.000	1.3	35.7	74.0
3950.800000	41.1	5.0	1000.000	5.1	32.9	74.0
5074.400000	43.5	5.0	1000.000	8.3	30.5	74.0
5748.800000	47.2	5.0	1000.000	9.5	26.8	74.0

CAV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB/m)	Margin - CAV (dB)	Limit - CAV (dBµV/m)
1219.200000	21.3	5.0	1000.000	-7.6	28.7	50.0
2048.000000	26.6	5.0	1000.000	0.2	23.4	50.0
3094.000000	25.8	5.0	1000.000	1.3	28.2	54.0
3950.800000	28.5	5.0	1000.000	5.1	25.5	54.0
5074.400000	30.3	5.0	1000.000	8.3	23.7	54.0
5748.800000	31.3	5.0	1000.000	9.5	22.7	54.0

For adaptor: adaptor 3_FY2401500S3, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (charging mode,110V~/60Hz)

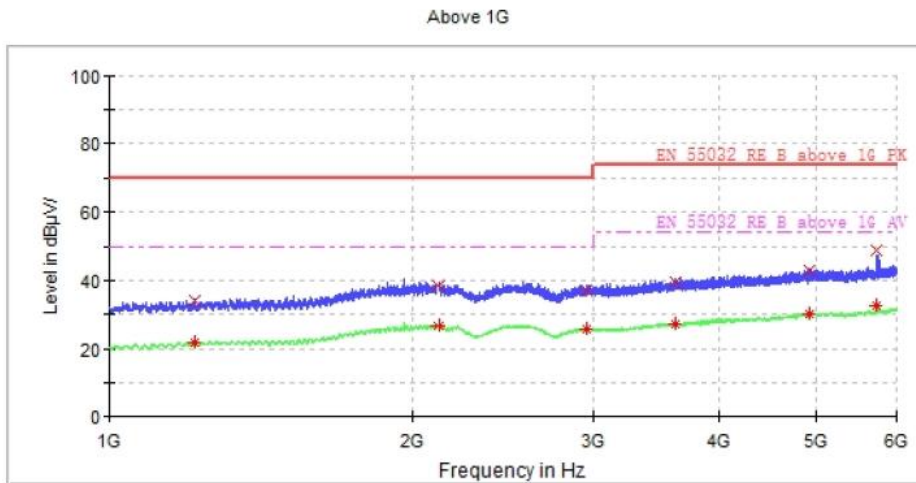

Graphical Results - Vertical Polarity

PK


Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1213.600000	34.1	5.0	1000.000	-7.7	35.9	70.0
2113.600000	38.5	5.0	1000.000	0.1	31.5	70.0
2956.400000	37.3	5.0	1000.000	0.8	32.7	70.0
3622.400000	39.8	5.0	1000.000	3.5	34.2	74.0
4919.600000	43.2	5.0	1000.000	7.9	30.8	74.0
5738.800000	49.2	5.0	1000.000	9.5	24.8	74.0

CAV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB/m)	Margin - CAV (dB)	Limit - CAV (dBµV/m)
1213.600000	21.8	5.0	1000.000	-7.7	28.2	50.0
2113.600000	26.7	5.0	1000.000	0.1	23.3	50.0
2956.400000	25.7	5.0	1000.000	0.8	28.3	54.0
3622.400000	27.2	5.0	1000.000	3.5	26.8	54.0
4919.600000	30.1	5.0	1000.000	7.9	23.9	54.0
5738.800000	32.9	5.0	1000.000	9.5	21.1	54.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (charging mode,230V~/50Hz)

Above 1G

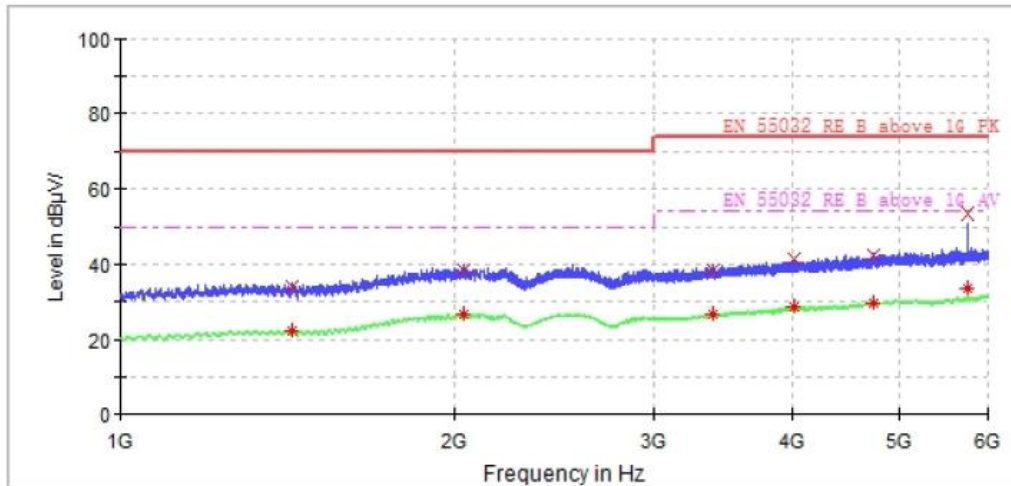

Graphical Results - Horizontal Polarity

PK


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1428.800000	34.4	22.2	5.0	1000.000	-5.9	35.6	70.0
2032.000000	38.8	26.8	5.0	1000.000	0.2	31.2	70.0
3398.800000	38.6	26.6	5.0	1000.000	2.5	35.4	74.0
4014.800000	41.6	28.6	5.0	1000.000	5.3	32.4	74.0
4728.400000	42.4	29.8	5.0	1000.000	7.3	31.6	74.0
5750.400000	53.3	33.8	5.0	1000.000	9.5	20.7	74.0

CAV

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB/m)	Margin - CAV (dB)	Limit - CAV (dBµV/m)
1428.800000	34.4	22.2	5.0	1000.000	-5.9	27.8	50.0
2032.000000	38.8	26.8	5.0	1000.000	0.2	23.2	50.0
3398.800000	38.6	26.6	5.0	1000.000	2.5	27.4	54.0
4014.800000	41.6	28.6	5.0	1000.000	5.3	25.4	54.0
4728.400000	42.4	29.8	5.0	1000.000	7.3	24.2	54.0
5750.400000	53.3	33.8	5.0	1000.000	9.5	20.2	54.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (charging mode,230V~/50Hz)

Above 1G

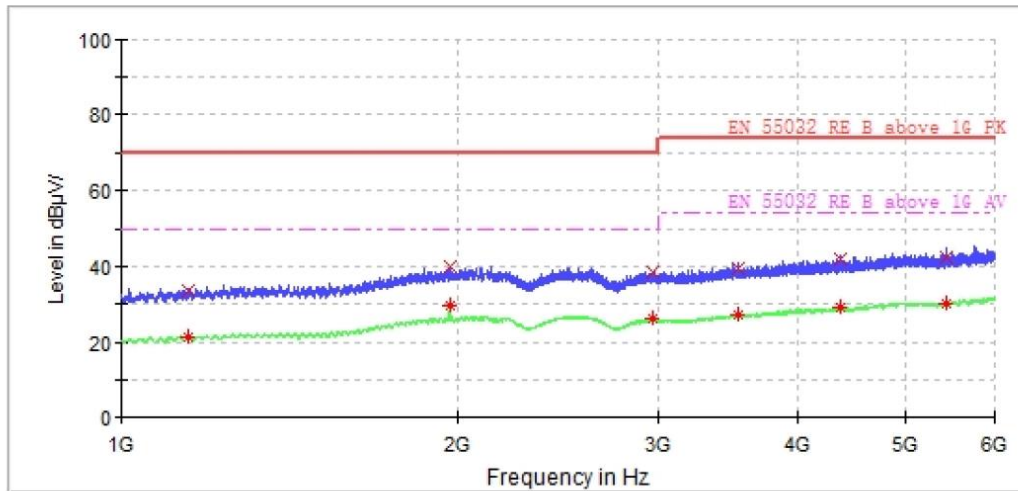

Graphical Results - Vertical Polarity


PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1149.600000	33.8	5.0	1000.000	-8.2	36.2	70.0
1962.800000	40.0	5.0	1000.000	-0.1	30.0	70.0
2969.200000	38.5	5.0	1000.000	0.8	31.5	70.0
3539.600000	39.4	5.0	1000.000	3.1	34.6	74.0
4375.200000	42.1	5.0	1000.000	6.2	31.9	74.0
5435.200000	42.7	5.0	1000.000	8.8	31.3	74.0

CAV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB/m)	Margin - CAV (dB)	Limit - CAV (dBµV/m)
1149.600000	21.4	5.0	1000.000	-8.2	28.6	50.0
1962.800000	29.8	5.0	1000.000	-0.1	20.2	50.0
2969.200000	26.0	5.0	1000.000	0.8	28	54.0
3539.600000	27.4	5.0	1000.000	3.1	26.6	54.0
4375.200000	29.1	5.0	1000.000	6.2	24.9	54.0
5435.200000	30.3	5.0	1000.000	8.8	23.7	54.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (running mode,110V~/60Hz)

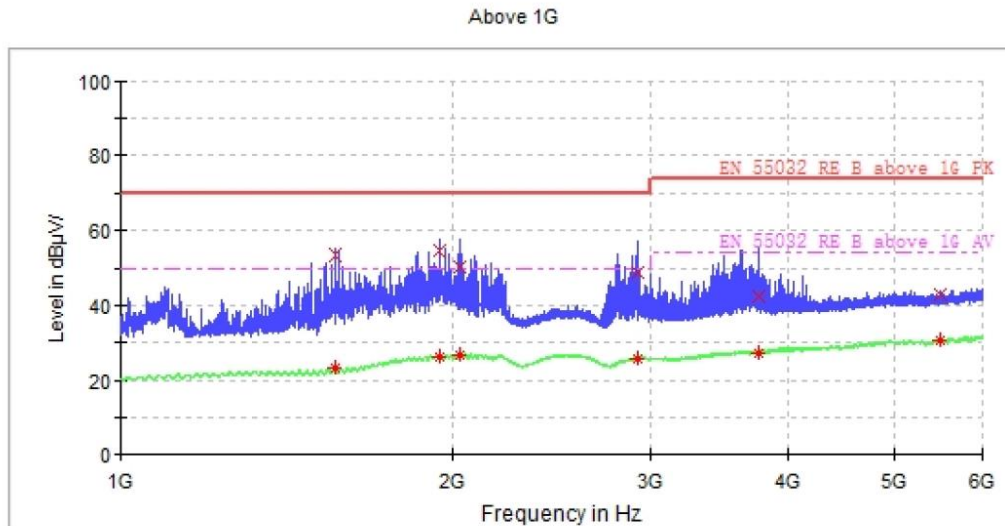

Graphical Results - Horizontal Polarity


PK

Frequency (MHz)	MaxPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dB μ V/m)
1561.600000	53.3	5.0	1000.000	-4.6	16.7	70.0
1945.200000	54.3	5.0	1000.000	-0.3	15.7	70.0
2028.800000	50.6	5.0	1000.000	0.2	19.4	70.0
2928.000000	48.9	5.0	1000.000	0.7	21.1	70.0
3758.000000	42.5	5.0	1000.000	4.2	31.5	74.0
5498.800000	43.1	5.0	1000.000	8.8	30.9	74.0

CAV

Frequency (MHz)	Average (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB/m)	Margin - CAV (dB)	Limit - CAV (dB μ V/m)
1561.600000	23.0	5.0	1000.000	-4.6	27	50.0
1945.200000	26.4	5.0	1000.000	-0.3	23.6	50.0
2028.800000	26.9	5.0	1000.000	0.2	27.1	54.0
2928.000000	25.7	5.0	1000.000	0.7	28.3	54.0
3758.000000	27.5	5.0	1000.000	4.2	26.5	54.0
5498.800000	30.6	5.0	1000.000	8.8	23.4	54.0

For adaptor: adaptor 3_FY2401500S3, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (running mode,110V~/60Hz)

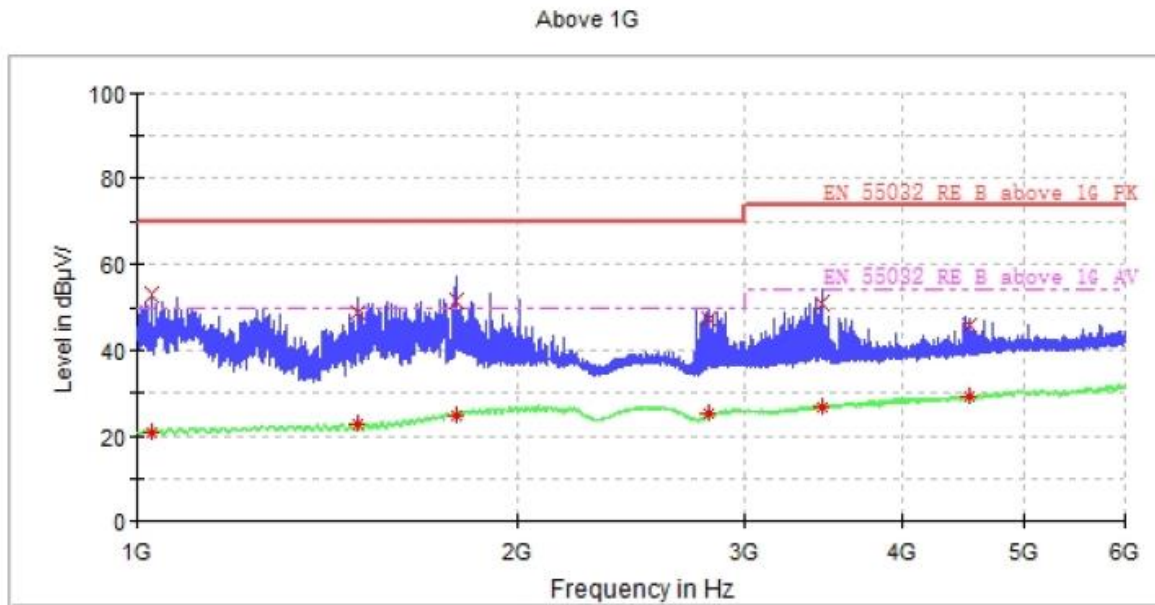

Graphical Results - Vertical Polarity

PK


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1027.200000	53.1	20.8	5.0	1000.000	-9.3	16.9	70.0
1492.800000	49.1	22.6	5.0	1000.000	-5.4	20.9	70.0
1786.800000	51.4	24.9	5.0	1000.000	-2.0	18.6	70.0
2817.200000	47.6	25.2	5.0	1000.000	0.5	22.4	70.0
3457.200000	51.2	27.0	5.0	1000.000	2.7	22.8	74.0
4524.000000	46.2	29.3	5.0	1000.000	6.6	27.8	74.0

CAV

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB/m)	Margin - CAV (dB)	Limit - CAV (dBµV/m)
1027.200000	53.1	20.8	5.0	1000.000	-9.3	29.2	50.0
1492.800000	49.1	22.6	5.0	1000.000	-5.4	27.4	50.0
1786.800000	51.4	24.9	5.0	1000.000	-2.0	29.1	54.0
2817.200000	47.6	25.2	5.0	1000.000	0.5	28.8	54.0
3457.200000	51.2	27.0	5.0	1000.000	2.7	27	54.0
4524.000000	46.2	29.3	5.0	1000.000	6.6	24.7	54.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (running mode,230V~/50Hz)

Above 1G

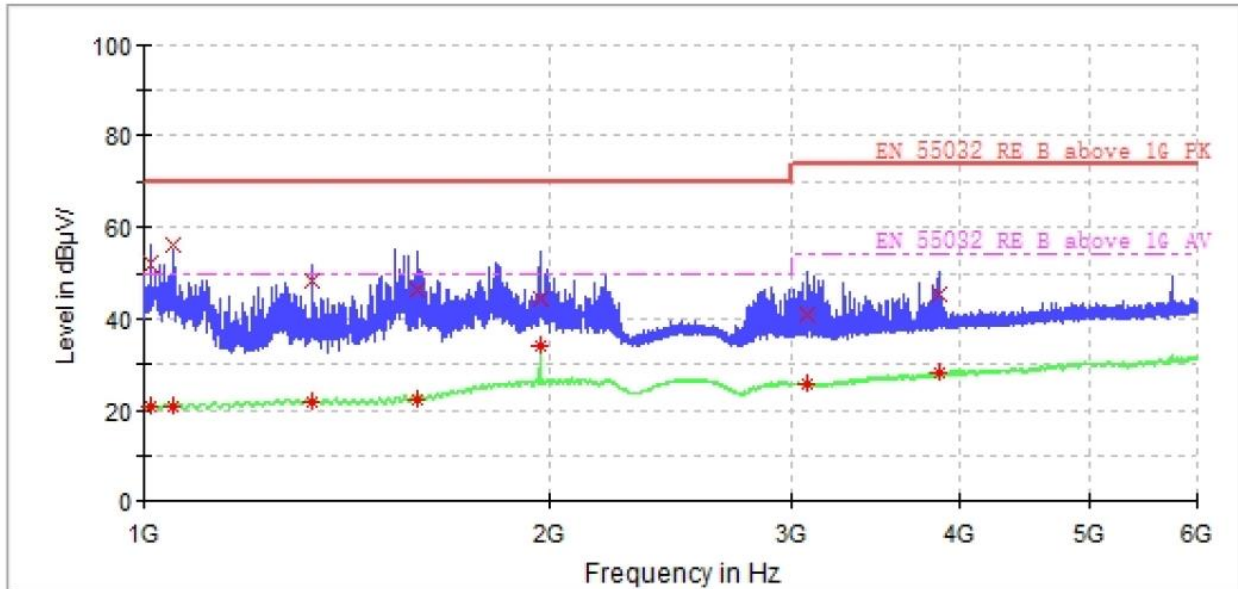

Graphical Results - Horizontal Polarity


PK

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dB μ V/m)
1010.400000	52.2	21.0	5.0	1000.000	-9.5	17.8	70.0
1049.200000	56.0	20.9	5.0	1000.000	-9.1	14.0	70.0
1332.400000	48.4	21.6	5.0	1000.000	-6.7	21.7	70.0
1591.200000	46.5	22.1	5.0	1000.000	-4.3	23.5	70.0
1964.800000	44.3	34.1	5.0	1000.000	-0.1	25.7	70.0
3081.600000	41.1	25.7	5.0	1000.000	1.2	32.9	74.0
3860.000000	45.8	28.0	5.0	1000.000	4.7	28.2	74.0

CAV

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB/m)	Margin - CAV (dB)	Limit - CAV (dB μ V/m)
1010.400000	52.2	21.0	5.0	1000.000	-9.5	29.0	50.0
1049.200000	56.0	20.9	5.0	1000.000	-9.1	29.1	50.0
1332.400000	48.4	21.6	5.0	1000.000	-6.7	28.4	50.0
1591.200000	46.5	22.1	5.0	1000.000	-4.3	27.9	50.0
1964.800000	44.3	34.1	5.0	1000.000	-0.1	15.9	50.0
3081.600000	41.1	25.7	5.0	1000.000	1.2	28.3	54.0
3860.000000	45.8	28.0	5.0	1000.000	4.7	26.0	54.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Frequency Range of Test: 1 GHz to 6 GHz (running mode,230V~/50Hz)

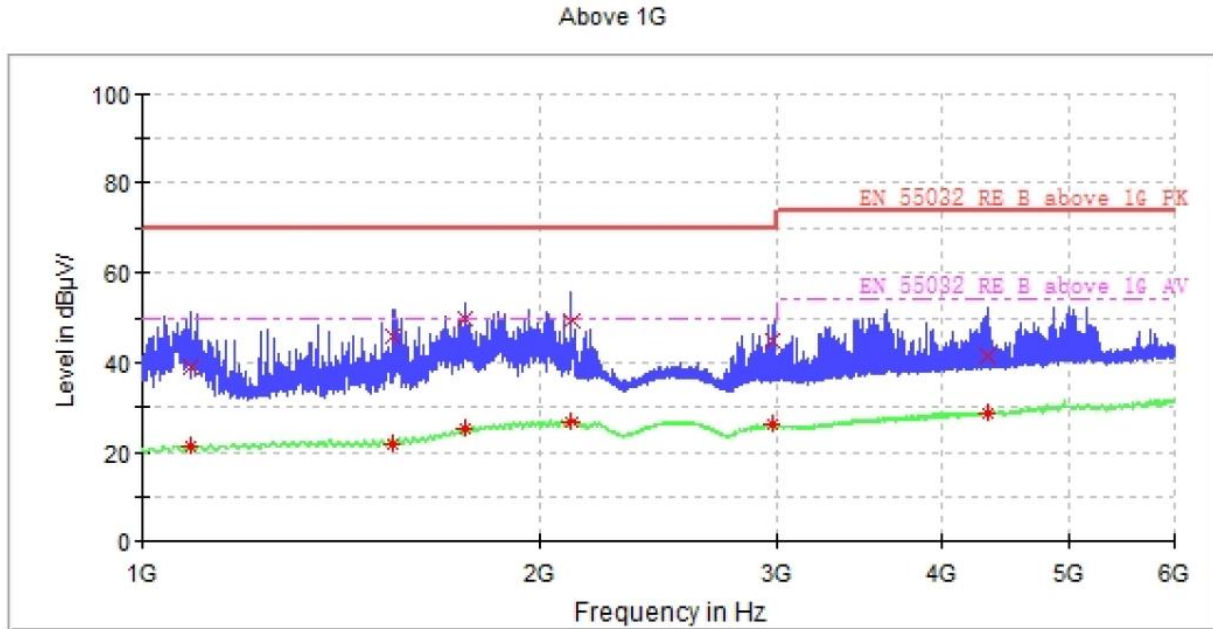


Graphical Results - Vertical Polarity

PK

Frequency (MHz)	MaxPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dB μ V/m)
1087.200000	39.0	5.0	1000.000	-8.8	31.0	70.0
1548.000000	46.3	5.0	1000.000	-4.8	23.7	70.0
1753.200000	49.9	5.0	1000.000	-2.4	20.1	70.0
2109.600000	49.4	5.0	1000.000	0.1	20.6	70.0
2982.800000	45.3	5.0	1000.000	0.8	24.7	70.0
4335.600000	41.6	5.0	1000.000	6.1	32.4	74.0

CAV

Frequency (MHz)	Average (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB/m)	Margin - CAV (dB)	Limit - CAV (dB μ V/m)
1087.200000	21.1	5.0	1000.000	-8.8	28.9	50.0
1548.000000	21.9	5.0	1000.000	-4.8	28.1	50.0
1753.200000	25.1	5.0	1000.000	-2.4	24.9	50.0
2109.600000	26.8	5.0	1000.000	0.1	23.2	50.0
2982.800000	26.0	5.0	1000.000	0.8	24.0	50.0
4335.600000	28.7	5.0	1000.000	6.1	25.3	54.0

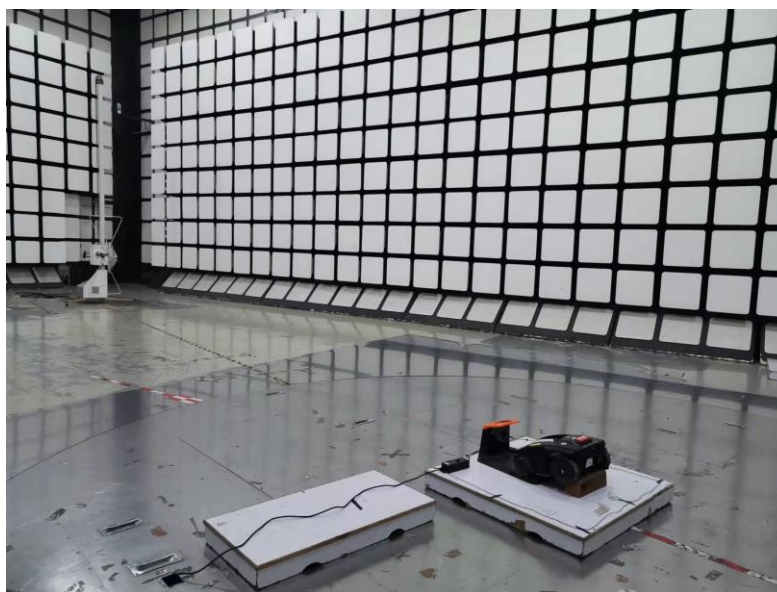

Test Setup (30MHz-100MHz)

2.1.8 Test Location

This test was carried out in 10m anechoic chamber and 3m anechoic.

2.2 Conducted Emissions

2.2.1 Specification Reference

ETSI EN 301 489-1: V2.2.3 (2019-11), Clause 8.4
 EN 55014-1:2017, Clause 4.3.3.6

2.2.2 Equipment Under Test


LLS BL300i/YG (Remark: EUT with Wi-Fi) , LLS BL300B/YG (Remark: EUT with BLE)

2.2.3 Date of Test

19/10/2021-29/10/2021

2.2.4 Test Method

The EUT was placed on a non-conductive table 0.1m above a reference ground plane. All power was connected to the EUT through an Artificial Mains Network (AMN). Conducted disturbance voltage measurements on mains lines were made at the output of the AMN. The AMN was placed 0.8m from the boundary of the EUT and bonded to the reference ground plane.

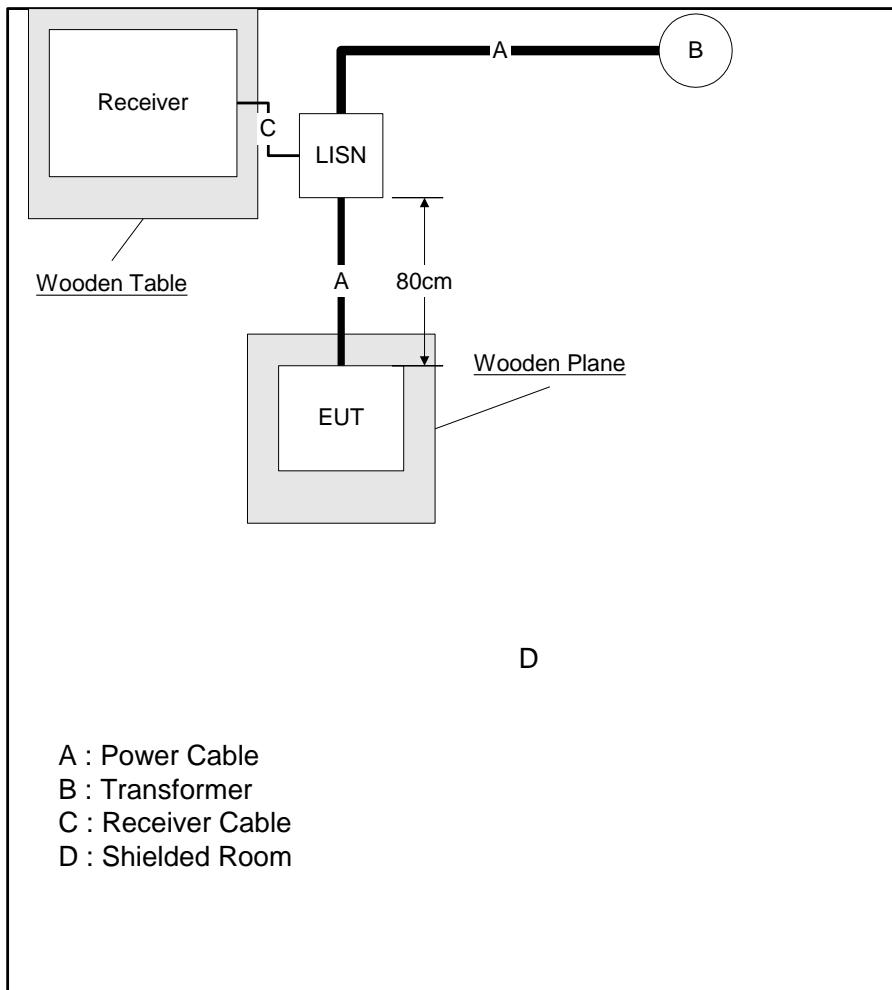



2.2.5 Environmental Conditions

Ambient Temperature 23.0-55.0 °C
 Relative Humidity 54.0-58.0 %
 Atmospheric Pressure 1003.0-1011.0mbar

2.2.6 Specification Limits

Required Specification Limits (EN 55032 Class B)			
Line Under Test	Frequency Range (MHz)	Quasi-peak (dBµV)	Average (dBµV)
AC Power Port	0.15 to 0.5	66 to 56	56 to 46
	0.5 to 5	56	46
	5 to 30	60	50

EN 55014-1 Household appliances and equipment causing similar disturbances and regulating controls incorporating semiconductor devices						
Frequency range MHz	Disturbance voltage at main terminals		Disturbance voltage at associated ports		Disturbance current at associated ports	
	Quasi-peak dBµV	Average dBµV	Quasi-peak dBµV	Average dBµV	Quasi-peak dBµA	Average dBµA
0.15 to 0.5	66 to 56	59 to 46	80	70	40 to 30	30 to 20
0.5 to 5	56	46	74	64	30	20
5 to 30	60	50	74	64		

Required Specification Limits (EN 301489-1)			
Line Under Test	Frequency Range (MHz)	Quasi-peak (dBµV)	Average (dBµV)
DC Power Port	0.15 to 0.5	79	66
	0.5 to 30	73	60


2.2.7 Test Results

Results for Configuration and Mode: AC Powered/Power on(Charging mode, running mode).

Performance assessment of the EUT made during this test: PASS.

Detailed results are shown below.

For adaptor: adapter 1_FY2401500S1, BLE mode
 Line Under Test: Line L (110V~/60Hz, Charging mode)

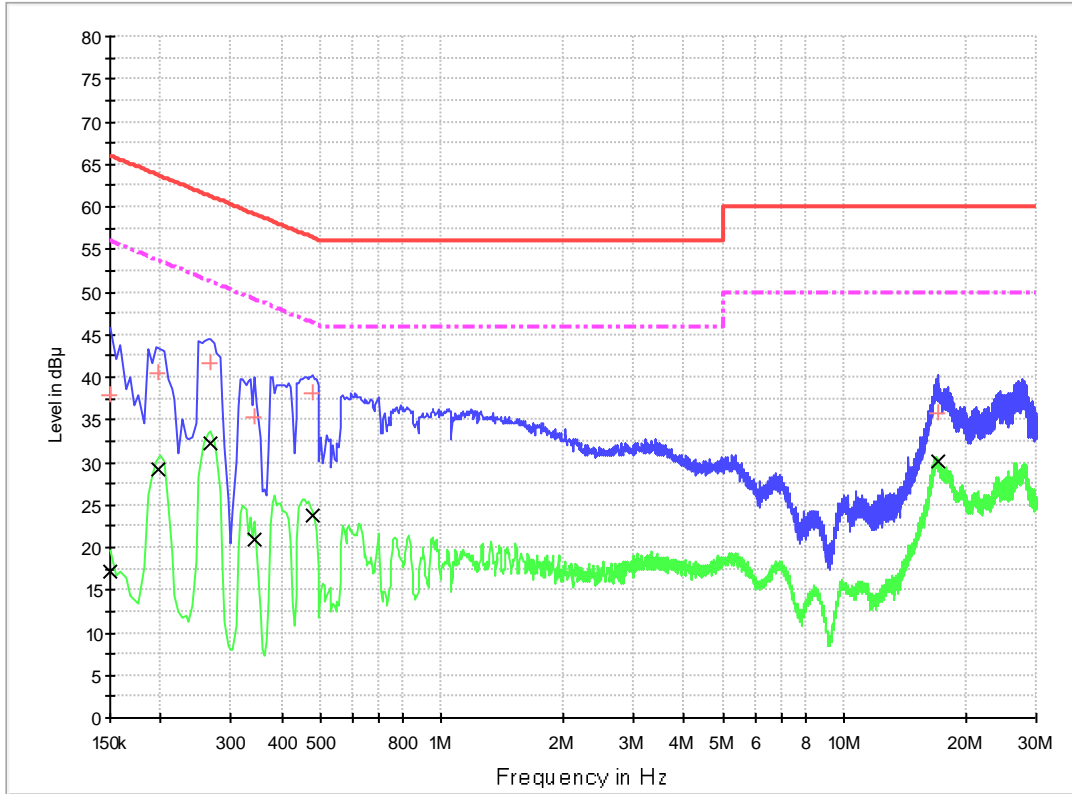

Graphical Results - Line L


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	37.8	1000.0	9.000	Off	L1	10.0	28.2	66.0
0.198000	40.5	1000.0	9.000	Off	L1	10.0	23.2	63.7
0.266000	41.6	1000.0	9.000	Off	L1	10.0	19.6	61.2
0.342000	35.3	1000.0	9.000	Off	L1	10.0	23.9	59.2
0.478000	38.1	1000.0	9.000	Off	L1	10.0	18.3	56.4
17.030000	35.8	1000.0	9.000	Off	L1	10.0	24.2	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	17.2	1000.0	9.000	Off	L1	10.0	38.8	56.0
0.198000	29.2	1000.0	9.000	Off	L1	10.0	24.5	53.7
0.266000	32.2	1000.0	9.000	Off	L1	10.0	19.0	51.2
0.342000	20.9	1000.0	9.000	Off	L1	10.0	28.3	49.2
0.478000	23.7	1000.0	9.000	Off	L1	10.0	22.7	46.4
17.030000	30.1	1000.0	9.000	Off	L1	10.0	19.9	50.0

For adaptor: adapter 1_FY2401500S1 ,BLE mode
 Line Under Test: Line N (110V~/60Hz, Charging mode)

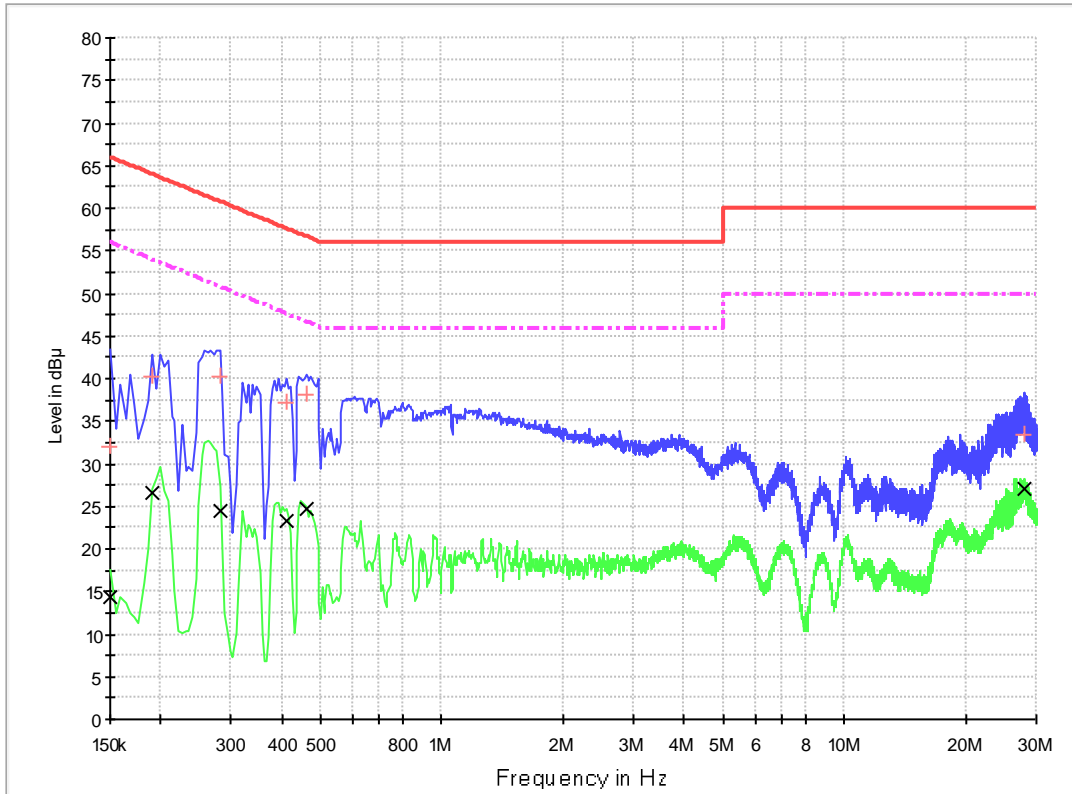

Graphical Results - Line N


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	31.9	1000.0	9.000	Off	N	10.0	34.1	66.0
0.190000	40.1	1000.0	9.000	Off	N	10.0	23.9	64.0
0.282000	40.3	1000.0	9.000	Off	N	10.0	20.4	60.8
0.410000	37.1	1000.0	9.000	Off	N	10.0	20.5	57.6
0.462000	38.1	1000.0	9.000	Off	N	10.0	18.6	56.7
27.962000	33.3	1000.0	9.000	Off	N	10.0	26.7	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	14.3	1000.0	9.000	Off	N	10.0	41.7	56.0
0.190000	26.6	1000.0	9.000	Off	N	10.0	27.4	54.0
0.282000	24.5	1000.0	9.000	Off	N	10.0	26.2	50.8
0.410000	23.4	1000.0	9.000	Off	N	10.0	24.2	47.6
0.462000	24.6	1000.0	9.000	Off	N	10.0	22.1	46.7
27.962000	27.1	1000.0	9.000	Off	N	10.0	22.9	50.0

For adaptor: adapter 1_FY2401500S1 ,BLE mode
 Line Under Test: Line L (charging mode, 230V~/50Hz)

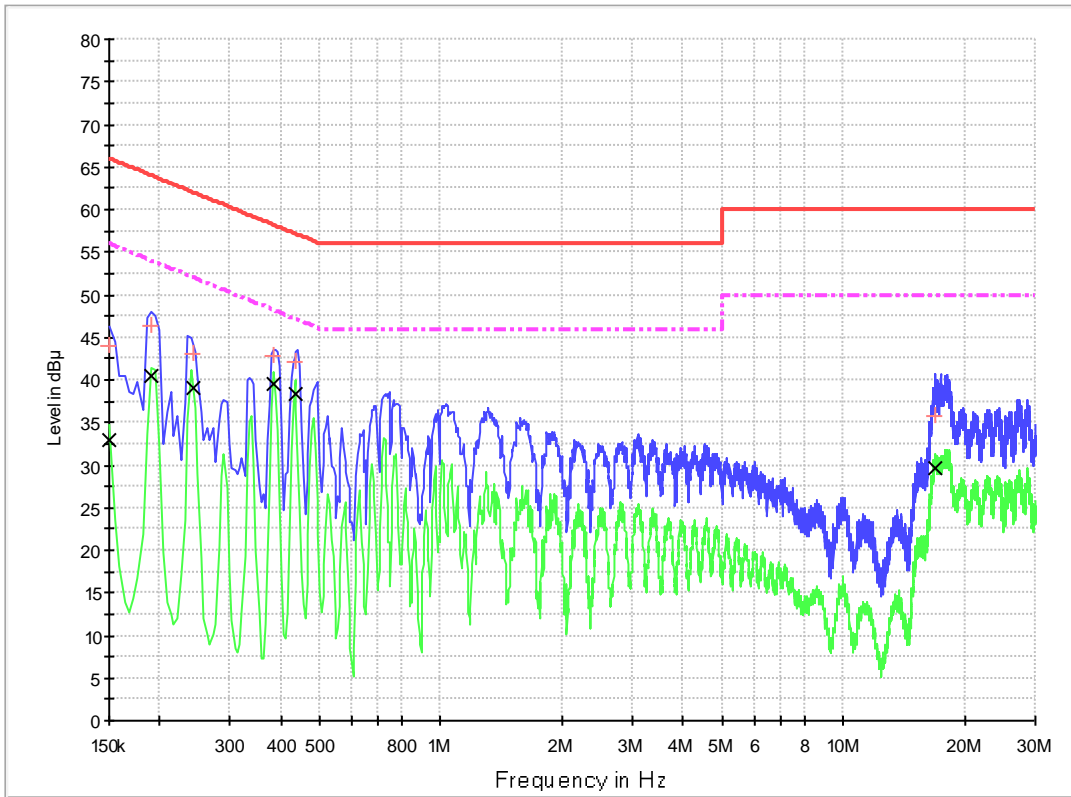

Graphical Results - Line L


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	44.1	1000.0	9.000	Off	L1	10.0	21.9	66.0
0.190000	46.4	1000.0	9.000	Off	L1	10.0	17.6	64.0
0.242000	43.0	1000.0	9.000	Off	L1	10.0	19.1	62.0
0.386000	42.8	1000.0	9.000	Off	L1	10.0	15.3	58.1
0.434000	42.1	1000.0	9.000	Off	L1	10.0	15.1	57.2
16.838000	35.8	1000.0	9.000	Off	L1	10.0	24.2	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	32.8	1000.0	9.000	Off	L1	10.0	23.2	56.0
0.190000	40.5	1000.0	9.000	Off	L1	10.0	13.6	54.0
0.242000	39.0	1000.0	9.000	Off	L1	10.0	13.0	52.0
0.386000	39.6	1000.0	9.000	Off	L1	10.0	8.6	48.1
0.434000	38.3	1000.0	9.000	Off	L1	10.0	8.9	47.2
16.838000	29.8	1000.0	9.000	Off	L1	10.0	20.2	50.0

For adaptor: adapter 1_FY2401500S1 ,BLE mode
 Line Under Test: Line N (charging mode, 230V~/50Hz)

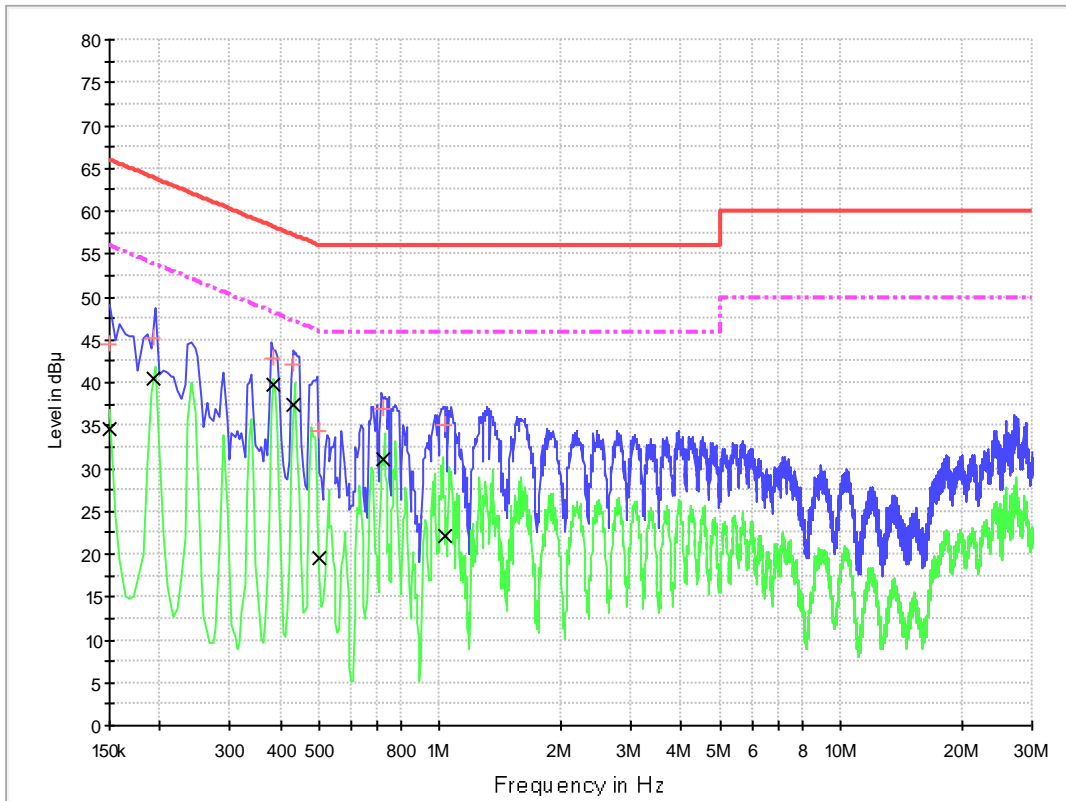

Graphical Results - Line N


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	44.4	1000.0	9.000	Off	N	10.0	21.6	66.0
0.194000	45.2	1000.0	9.000	Off	N	10.0	18.6	63.9
0.386000	42.7	1000.0	9.000	Off	N	10.0	15.4	58.1
0.430000	42.1	1000.0	9.000	Off	N	10.0	15.2	57.3
0.498000	34.4	1000.0	9.000	Off	N	10.0	21.7	56.0
0.718000	36.9	1000.0	9.000	Off	N	10.0	19.1	56.0
1.026000	35.0	1000.0	9.000	Off	N	10.0	21.0	56.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	34.7	1000.0	9.000	Off	N	10.0	21.3	56.0
0.194000	40.6	1000.0	9.000	Off	N	10.0	13.3	53.9
0.386000	39.8	1000.0	9.000	Off	N	10.0	8.4	48.1
0.430000	37.4	1000.0	9.000	Off	N	10.0	9.9	47.3
0.498000	19.5	1000.0	9.000	Off	N	10.0	26.6	46.0
0.718000	31.1	1000.0	9.000	Off	N	10.0	14.9	46.0
1.026000	22.2	1000.0	9.000	Off	N	10.0	23.8	46.0

For adaptor: adapter 1_FY2401500S1, BLE mode
 Line Under Test: Line L (running mode, 110V~/60Hz)

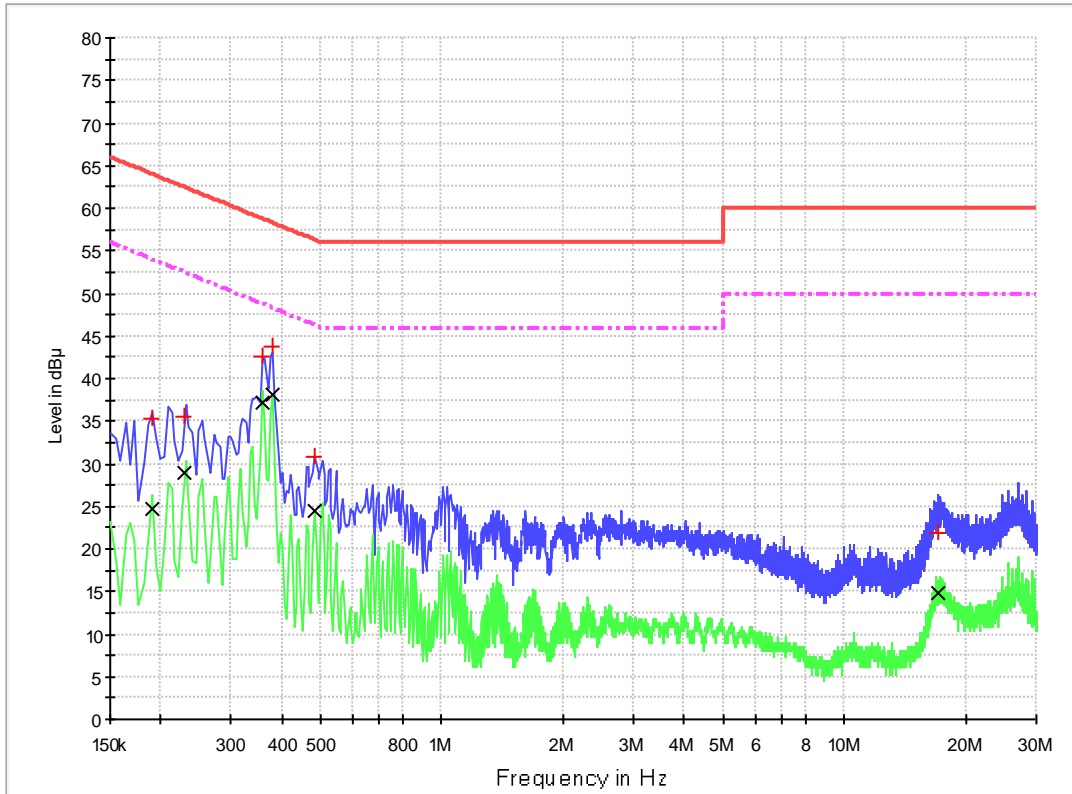

Graphical Results - Line L


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.190000	35.3	1000.0	9.000	Off	L1	10.0	28.8	64.0
0.230000	35.4	1000.0	9.000	Off	L1	10.0	27.0	62.4
0.358000	42.7	1000.0	9.000	Off	L1	10.0	16.1	58.8
0.378000	43.8	1000.0	9.000	Off	L1	10.0	14.5	58.3
0.482000	30.8	1000.0	9.000	Off	L1	10.0	25.5	56.3
17.146000	21.9	1000.0	9.000	Off	L1	10.0	38.1	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.190000	24.8	1000.0	9.000	Off	L1	10.0	29.2	54.0
0.230000	29.0	1000.0	9.000	Off	L1	10.0	23.4	52.4
0.358000	37.2	1000.0	9.000	Off	L1	10.0	11.6	48.8
0.378000	38.1	1000.0	9.000	Off	L1	10.0	10.2	48.3
0.482000	24.5	1000.0	9.000	Off	L1	10.0	21.8	46.3
17.146000	14.8	1000.0	9.000	Off	L1	10.0	35.2	50.0

For adaptor: adapter 1_FY2401500S1, BLE mode
 Line Under Test: Line N (running mode, 110V~/60Hz)

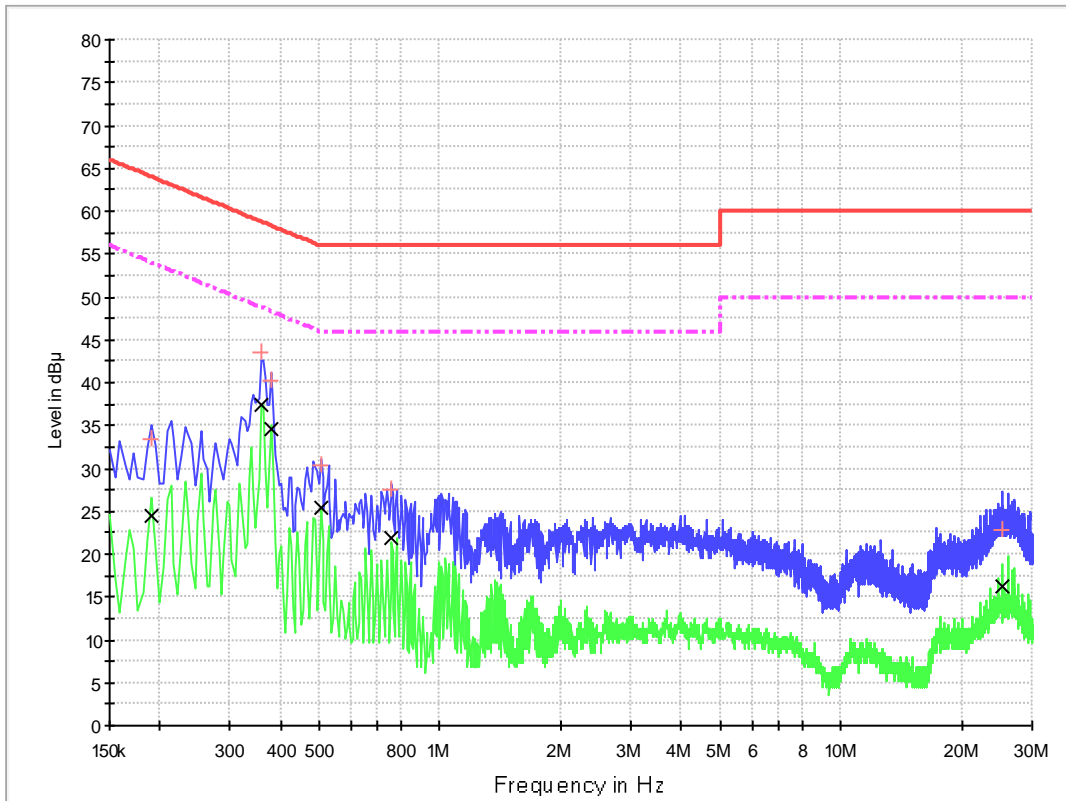

Graphical Results - Line N

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.190000	33.3	1000.0	9.000	Off	N	10.0	30.7	64.0
0.358000	43.5	1000.0	9.000	Off	N	10.0	15.3	58.8
0.378000	40.2	1000.0	9.000	Off	N	10.0	18.1	58.3
0.506000	30.4	1000.0	9.000	Off	N	10.0	25.6	56.0
0.758000	27.5	1000.0	9.000	Off	N	10.0	28.5	56.0
25.174000	22.8	1000.0	9.000	Off	N	10.0	37.2	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.190000	24.4	1000.0	9.000	Off	N	10.0	29.6	54.0
0.358000	37.4	1000.0	9.000	Off	N	10.0	11.4	48.8
0.378000	34.5	1000.0	9.000	Off	N	10.0	13.8	48.3
0.506000	25.3	1000.0	9.000	Off	N	10.0	20.7	46.0
0.758000	21.8	1000.0	9.000	Off	N	10.0	24.2	46.0
25.174000	16.2	1000.0	9.000	Off	N	10.0	33.8	50.0

For adaptor: adapter 1_FY2401500S1

Line Under Test: Line L (running mode, 230V~/50Hz)

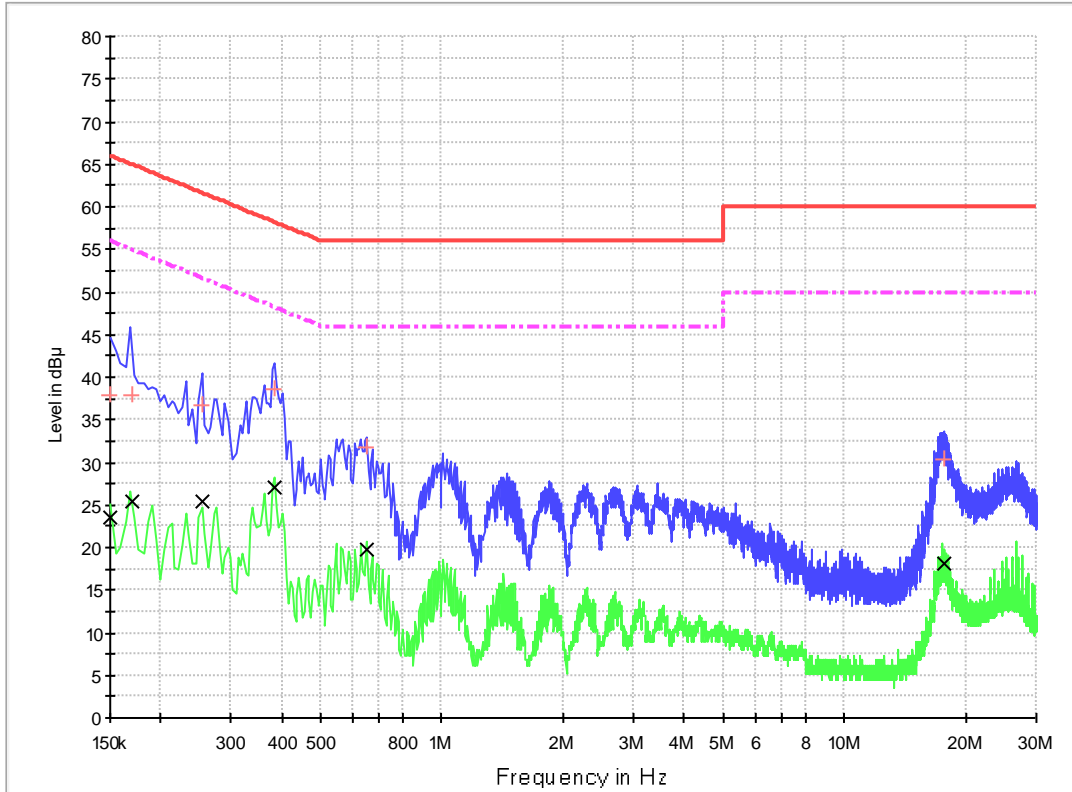

Graphical Results - Line L


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	37.8	1000.0	9.000	Off	L1	10.0	28.2	66.0
0.170000	37.9	1000.0	9.000	Off	L1	10.0	27.1	65.0
0.254000	36.7	1000.0	9.000	Off	L1	10.0	25.0	61.6
0.386000	38.7	1000.0	9.000	Off	L1	10.0	19.5	58.1
0.650000	31.7	1000.0	9.000	Off	L1	10.0	24.3	56.0
17.602000	30.3	1000.0	9.000	Off	L1	10.0	29.7	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	23.5	1000.0	9.000	Off	L1	10.0	32.5	56.0
0.170000	25.5	1000.0	9.000	Off	L1	10.0	29.5	55.0
0.254000	25.5	1000.0	9.000	Off	L1	10.0	26.2	51.6
0.386000	27.0	1000.0	9.000	Off	L1	10.0	21.2	48.1
0.650000	19.8	1000.0	9.000	Off	L1	10.0	26.2	46.0
17.602000	18.2	1000.0	9.000	Off	L1	10.0	31.8	50.0

For adaptor: adapter 1_FY2401500S1
 Line Under Test: Line N (running mode, 230V~/50Hz)

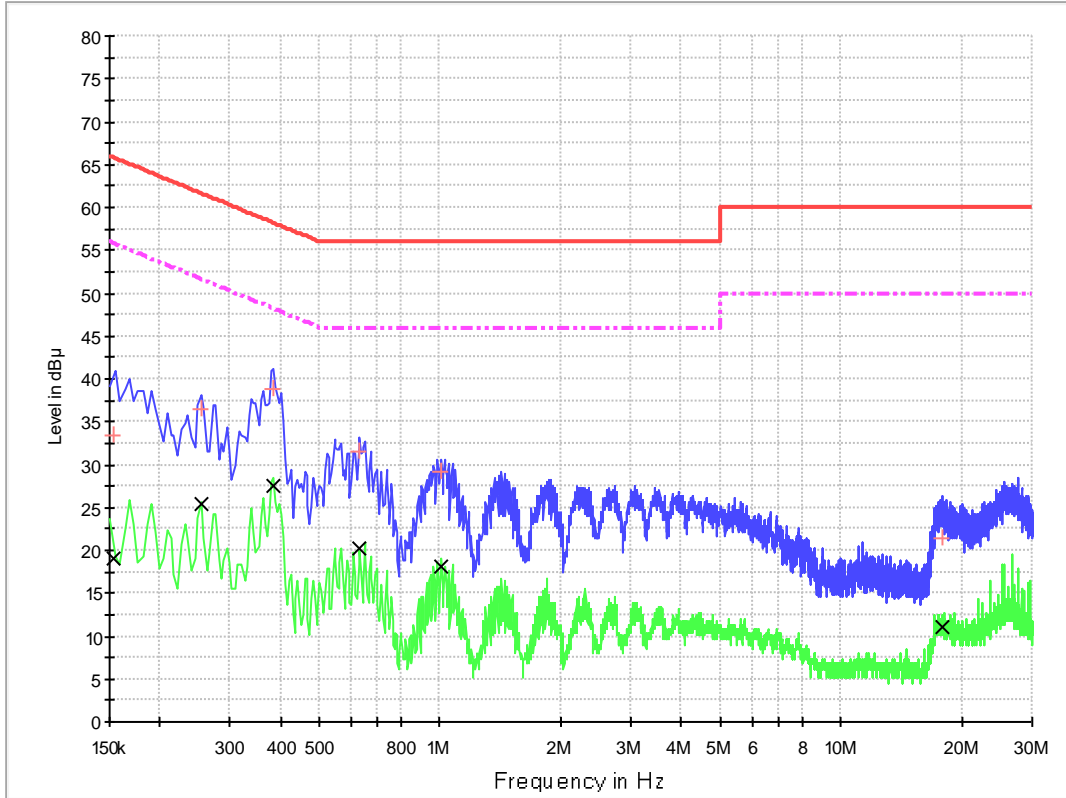

Graphical Results - Line N

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.154000	33.4	1000.0	9.000	Off	L1	10.0	32.4	65.8
0.254000	36.6	1000.0	9.000	Off	L1	10.0	25.1	61.6
0.386000	38.9	1000.0	9.000	Off	L1	10.0	19.2	58.1
0.630000	31.6	1000.0	9.000	Off	L1	10.0	24.4	56.0
1.010000	29.2	1000.0	9.000	Off	L1	10.0	26.8	56.0
17.990000	21.3	1000.0	9.000	Off	L1	10.0	38.7	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.154000	19.1	1000.0	9.000	Off	L1	10.0	36.7	55.8
0.254000	25.5	1000.0	9.000	Off	L1	10.0	26.1	51.6
0.386000	27.4	1000.0	9.000	Off	L1	10.0	20.7	48.1
0.630000	20.3	1000.0	9.000	Off	L1	10.0	25.7	46.0
1.010000	18.0	1000.0	9.000	Off	L1	10.0	28.0	46.0
17.990000	11.1	1000.0	9.000	Off	L1	10.0	38.9	50.0

For adaptor: adapter 1_FY2401500S1 , BLE mode

Line Under Test: Line Positive (DC Input, charging mode, 110V~/60Hz)

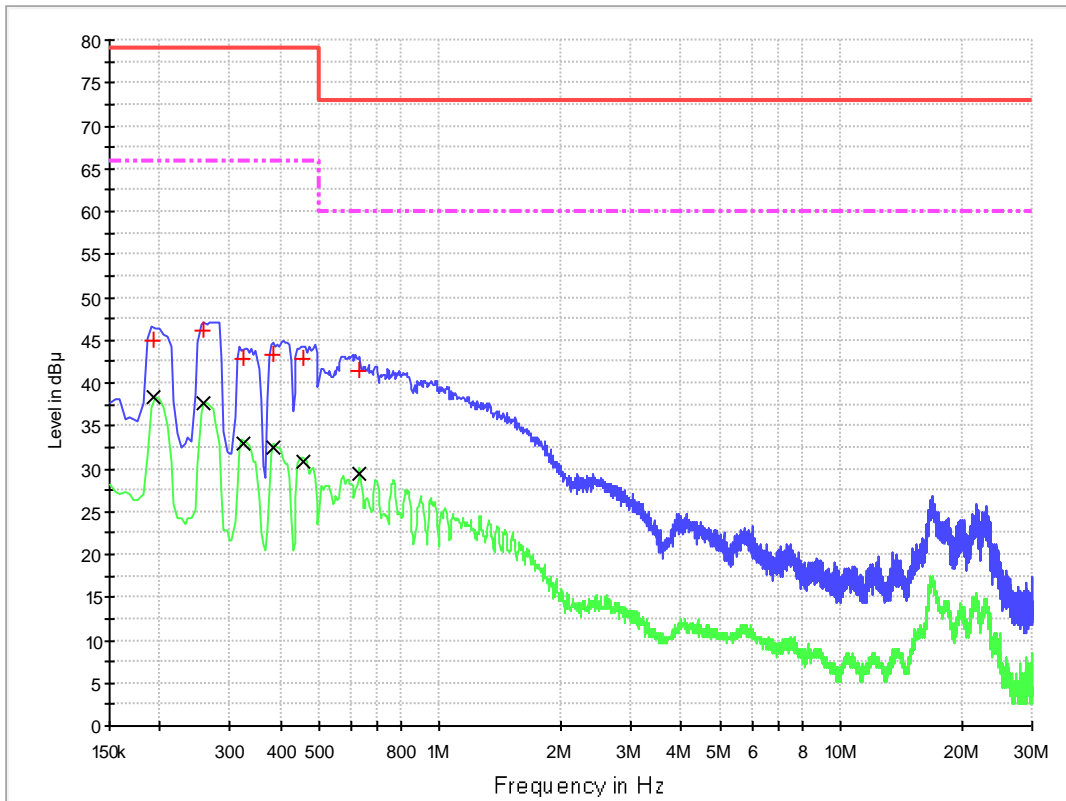

Graphical Results - Line L


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.194000	45.2	1000.0	9.000	Off	10.0	33.8	79.0
0.262000	45.9	1000.0	9.000	Off	10.0	33.1	79.0
0.326000	42.8	1000.0	9.000	Off	10.0	36.2	79.0
0.394000	43.2	1000.0	9.000	Off	10.0	35.8	79.0
0.462000	42.6	1000.0	9.000	Off	10.0	36.4	79.0
0.694000	39.9	1000.0	9.000	Off	10.0	33.1	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.194000	38.4	1000.0	9.000	Off	10.0	27.6	66.0
0.262000	37.8	1000.0	9.000	Off	10.0	28.2	66.0
0.326000	32.9	1000.0	9.000	Off	10.0	33.1	66.0
0.394000	32.2	1000.0	9.000	Off	10.0	33.8	66.0
0.462000	30.5	1000.0	9.000	Off	10.0	35.5	66.0
0.694000	28.2	1000.0	9.000	Off	10.0	31.8	60.0

For adaptor: adapter 1_FY2401500S1 ,BLE mode
 Line Under Test: Line Negative (DC Input, charging mode, 110V~/60Hz)

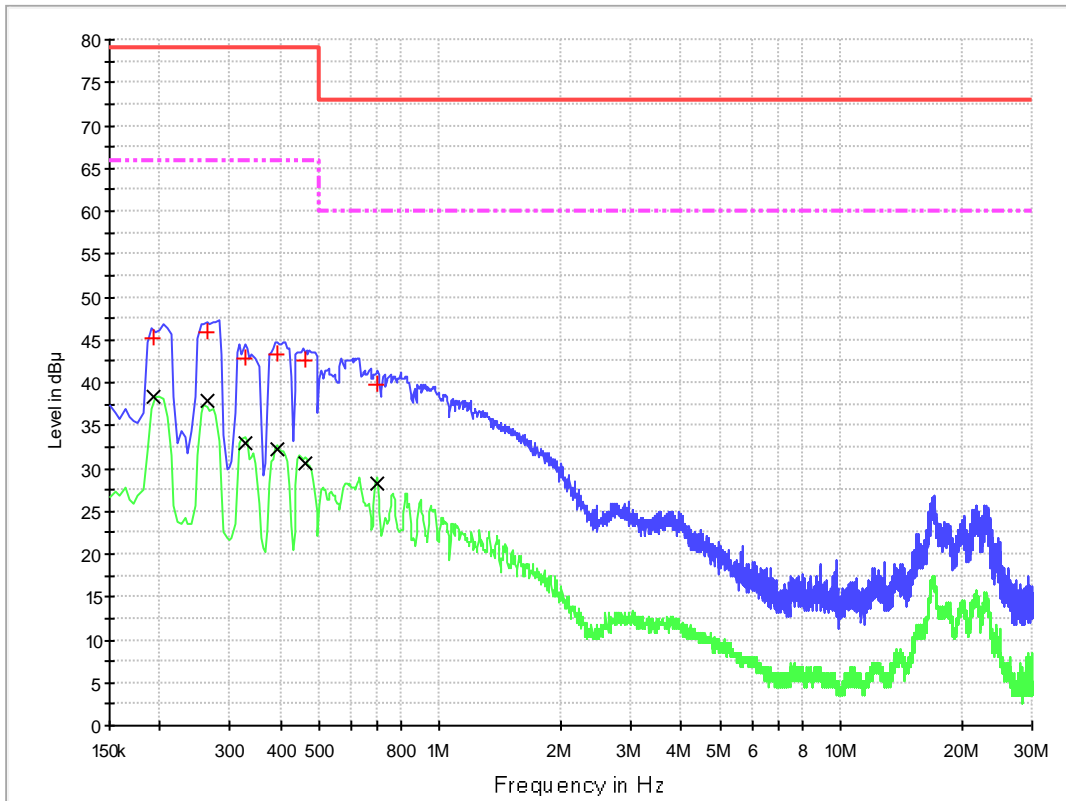

Graphical Results - Line N


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.194000	45.2	1000.0	9.000	Off	10.0	33.8	79.0
0.262000	45.9	1000.0	9.000	Off	10.0	33.1	79.0
0.326000	42.8	1000.0	9.000	Off	10.0	36.2	79.0
0.394000	43.2	1000.0	9.000	Off	10.0	35.8	79.0
0.462000	42.6	1000.0	9.000	Off	10.0	36.4	79.0
0.694000	39.9	1000.0	9.000	Off	10.0	33.1	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.194000	38.4	1000.0	9.000	Off	10.0	27.6	66.0
0.262000	37.8	1000.0	9.000	Off	10.0	28.2	66.0
0.326000	32.9	1000.0	9.000	Off	10.0	33.1	66.0
0.394000	32.2	1000.0	9.000	Off	10.0	33.8	66.0
0.462000	30.5	1000.0	9.000	Off	10.0	35.5	66.0
0.694000	28.2	1000.0	9.000	Off	10.0	31.8	60.0

For adaptor: adapter 1_FY2401500S1,BLE mode
 Line Under Test: Line Positive (DC Input, running mode, 110V~/60Hz)

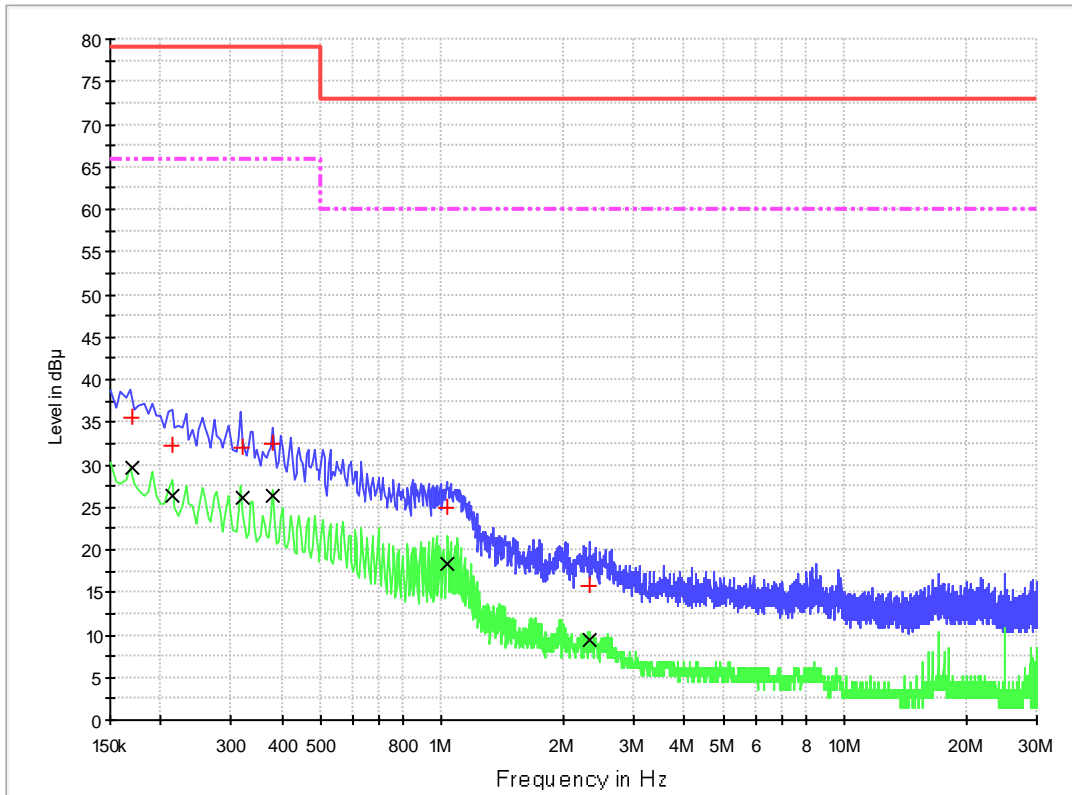

Graphical Results - Line L


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.170000	35.6	1000.0	9.000	Off	10.0	43.4	79.0
0.214000	32.3	1000.0	9.000	Off	10.0	46.7	79.0
0.318000	31.9	1000.0	9.000	Off	10.0	47.1	79.0
0.378000	32.4	1000.0	9.000	Off	10.0	46.6	79.0
1.026000	24.9	1000.0	9.000	Off	10.0	48.1	73.0
2.330000	15.8	1000.0	9.000	Off	10.0	57.2	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.170000	29.6	1000.0	9.000	Off	10.0	36.4	66.0
0.214000	26.3	1000.0	9.000	Off	10.0	39.7	66.0
0.318000	26.2	1000.0	9.000	Off	10.0	39.8	66.0
0.378000	26.4	1000.0	9.000	Off	10.0	39.6	66.0
1.026000	18.2	1000.0	9.000	Off	10.0	41.8	60.0
2.330000	9.4	1000.0	9.000	Off	10.0	50.6	60.0

For adaptor: adapter 1_FY2401500S1, BLE mode
 Line Under Test: Line Negative (DC Input, running mode, 110V~/60Hz)

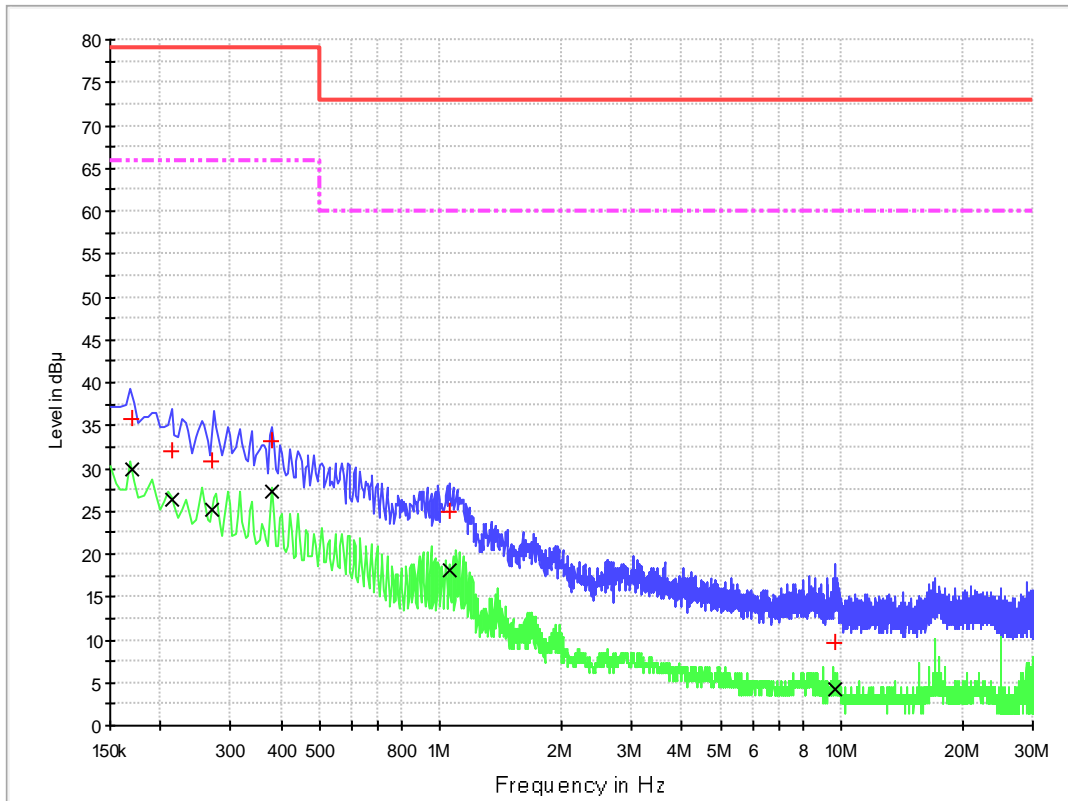

Graphical Results - Line N


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.170000	35.8	1000.0	9.000	Off	10.0	43.2	79.0
0.214000	32.0	1000.0	9.000	Off	10.0	47.0	79.0
0.270000	30.9	1000.0	9.000	Off	10.0	48.1	79.0
0.378000	33.3	1000.0	9.000	Off	10.0	45.7	79.0
1.054000	24.9	1000.0	9.000	Off	10.0	48.1	73.0
9.658000	9.5	1000.0	9.000	Off	10.0	63.5	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.170000	29.8	1000.0	9.000	Off	10.0	36.2	66.0
0.214000	26.3	1000.0	9.000	Off	10.0	39.7	66.0
0.270000	25.2	1000.0	9.000	Off	10.0	40.8	66.0
0.378000	27.2	1000.0	9.000	Off	10.0	38.8	66.0
1.054000	18.1	1000.0	9.000	Off	10.0	41.9	60.0
9.658000	4.3	1000.0	9.000	Off	10.0	55.7	60.0

For adaptor: adapter 1_FY2401500S1, BLE mode
 Line Under Test: Line Positive (DC Input, charging mode, 230V~/50Hz)

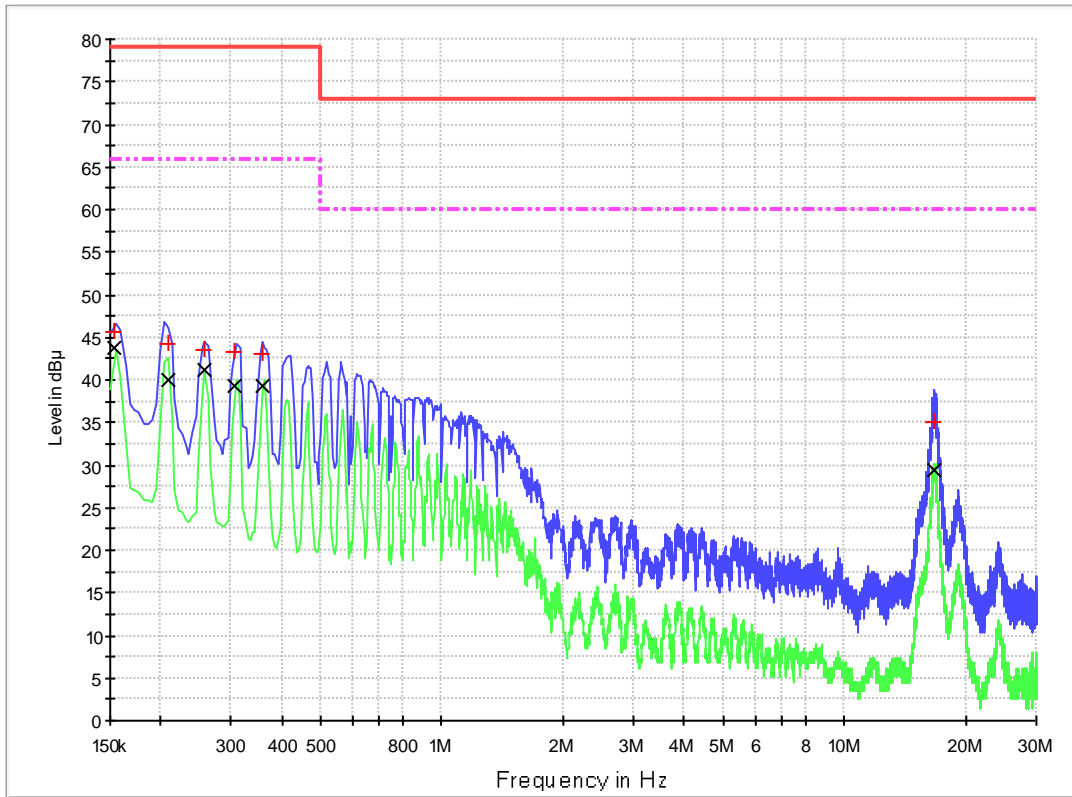

Graphical Results - Line L


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.154000	45.7	1000.0	9.000	Off	10.0	33.3	79.0
0.210000	44.3	1000.0	9.000	Off	10.0	34.7	79.0
0.258000	43.6	1000.0	9.000	Off	10.0	35.4	79.0
0.306000	43.3	1000.0	9.000	Off	10.0	35.7	79.0
0.358000	43.2	1000.0	9.000	Off	10.0	35.8	79.0
16.742000	35.1	1000.0	9.000	Off	10.0	37.9	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.154000	43.7	1000.0	9.000	Off	10.0	22.3	66.0
0.210000	40.1	1000.0	9.000	Off	10.0	25.9	66.0
0.258000	41.1	1000.0	9.000	Off	10.0	24.9	66.0
0.306000	39.4	1000.0	9.000	Off	10.0	26.6	66.0
0.358000	39.2	1000.0	9.000	Off	10.0	26.8	66.0
16.742000	29.3	1000.0	9.000	Off	10.0	30.7	60.0

For adaptor: adapter 1_FY2401500S1, BLE mode
 Line Under Test: Line Negative (DC Input, charging mode, 230V~/50Hz)

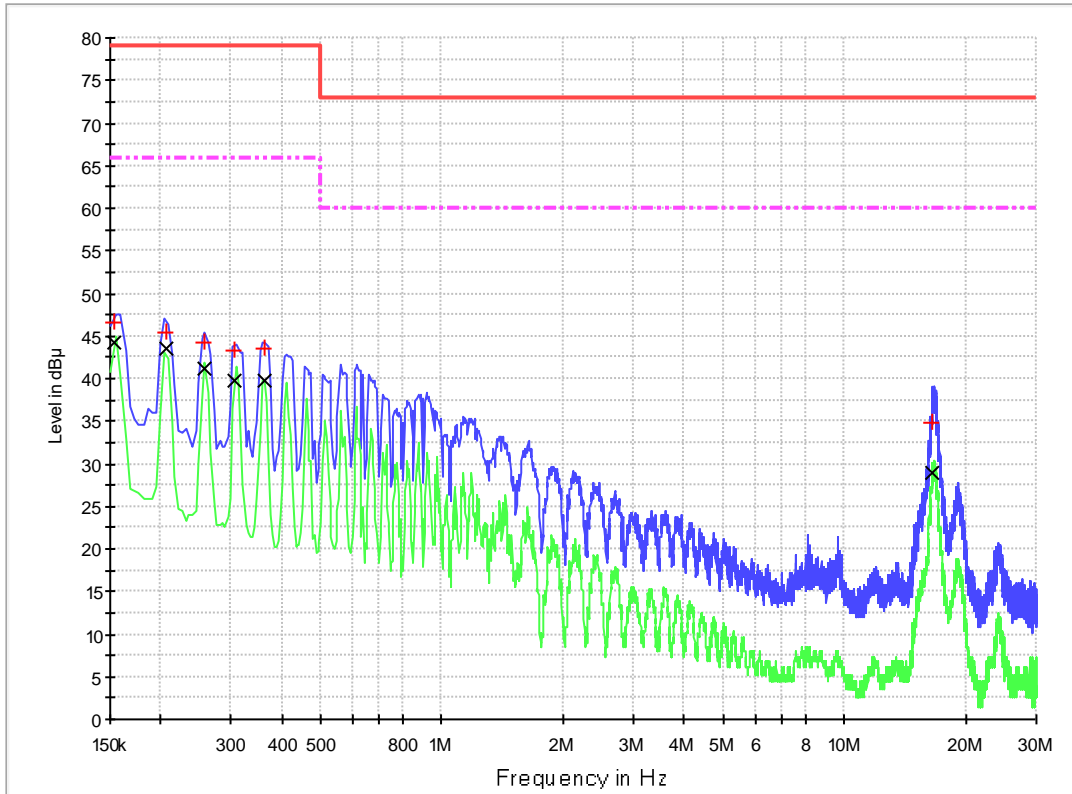

Graphical Results - Line N


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.154000	46.5	1000.0	9.000	Off	10.0	32.5	79.0
0.206000	45.5	1000.0	9.000	Off	10.0	33.5	79.0
0.258000	44.2	1000.0	9.000	Off	10.0	34.8	79.0
0.306000	43.3	1000.0	9.000	Off	10.0	35.7	79.0
0.362000	43.5	1000.0	9.000	Off	10.0	35.5	79.0
16.614000	34.9	1000.0	9.000	Off	10.0	38.1	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.154000	44.3	1000.0	9.000	Off	10.0	21.7	66.0
0.206000	43.5	1000.0	9.000	Off	10.0	22.5	66.0
0.258000	41.3	1000.0	9.000	Off	10.0	24.7	66.0
0.306000	39.7	1000.0	9.000	Off	10.0	26.3	66.0
0.362000	39.7	1000.0	9.000	Off	10.0	26.3	66.0
16.614000	28.9	1000.0	9.000	Off	10.0	31.1	60.0

For adaptor: adapter 1_FY2401500S1, BLE mode
 Line Under Test: Line Positive (DC Input, running mode, 230V~/50Hz)

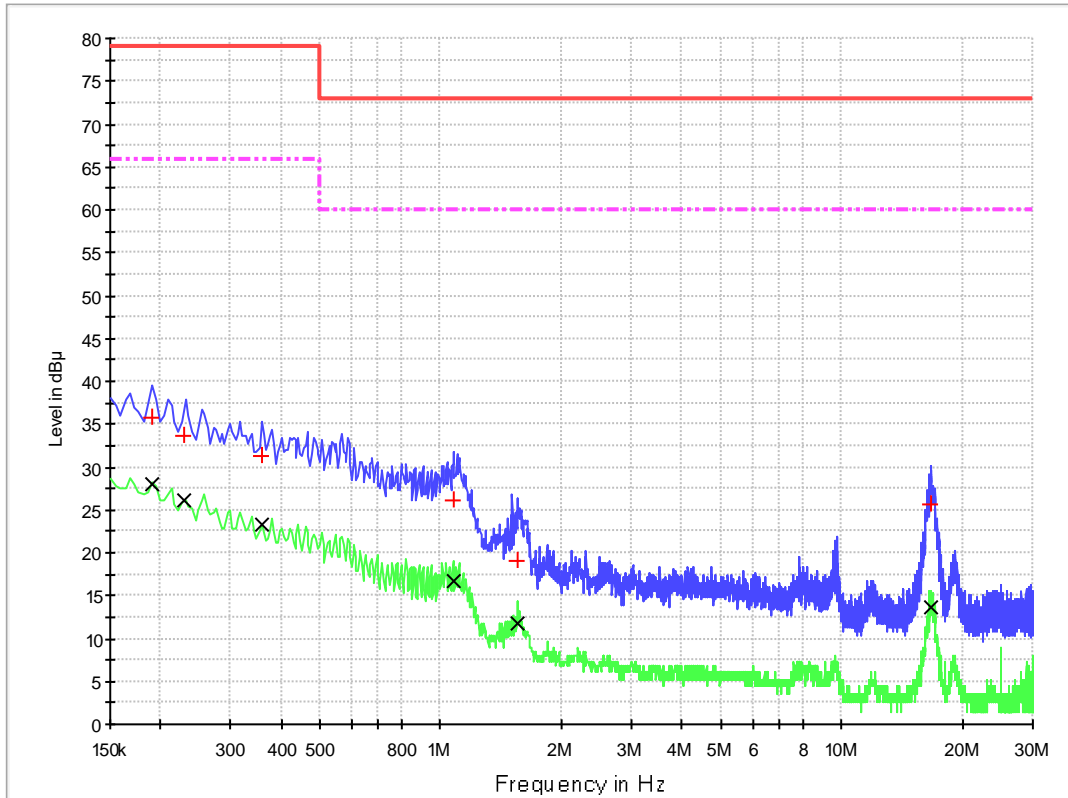

Graphical Results - Line L

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.190000	35.7	1000.0	9.000	Off	10.0	43.3	79.0
0.230000	33.6	1000.0	9.000	Off	10.0	45.4	79.0
0.358000	31.3	1000.0	9.000	Off	10.0	47.7	79.0
1.078000	26.1	1000.0	9.000	Off	10.0	46.9	73.0
1.554000	19.1	1000.0	9.000	Off	10.0	53.9	73.0
16.710000	25.7	1000.0	9.000	Off	10.0	47.3	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.190000	27.9	1000.0	9.000	Off	10.0	38.1	66.0
0.230000	26.1	1000.0	9.000	Off	10.0	39.9	66.0
0.358000	23.3	1000.0	9.000	Off	10.0	42.7	66.0
1.078000	16.6	1000.0	9.000	Off	10.0	43.4	60.0
1.554000	11.7	1000.0	9.000	Off	10.0	48.3	60.0
16.710000	13.8	1000.0	9.000	Off	10.0	46.2	60.0

For adaptor: adapter 1_FY2401500S1

Line Under Test: Line Negative (DC Input, running mode, 230V~/50Hz)

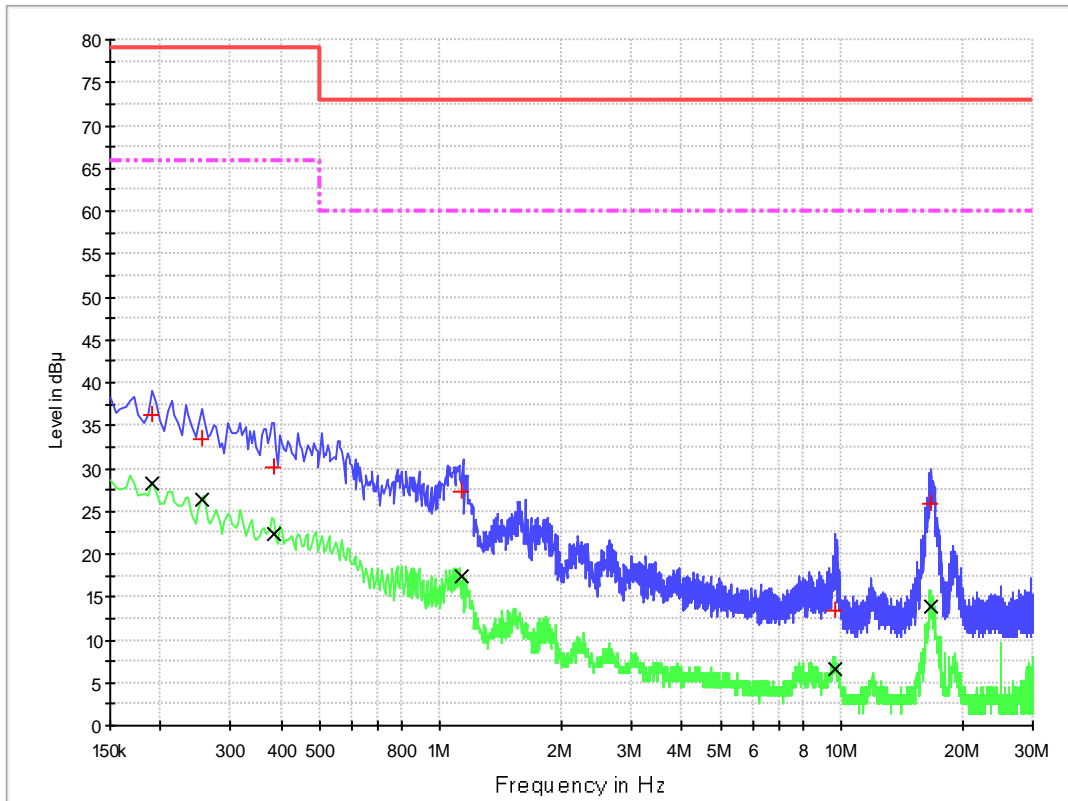

Graphical Results - Line N

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.190000	36.2	1000.0	9.000	Off	10.0	42.8	79.0
0.254000	33.5	1000.0	9.000	Off	10.0	45.5	79.0
0.386000	30.1	1000.0	9.000	Off	10.0	48.9	79.0
1.134000	27.3	1000.0	9.000	Off	10.0	45.7	73.0
9.626000	13.4	1000.0	9.000	Off	10.0	59.6	73.0
16.702000	25.9	1000.0	9.000	Off	10.0	47.1	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.190000	28.3	1000.0	9.000	Off	10.0	37.7	66.0
0.254000	26.4	1000.0	9.000	Off	10.0	39.6	66.0
0.386000	22.5	1000.0	9.000	Off	10.0	43.5	66.0
1.134000	17.4	1000.0	9.000	Off	10.0	42.6	60.0
9.626000	6.7	1000.0	9.000	Off	10.0	53.3	60.0
16.702000	13.9	1000.0	9.000	Off	10.0	46.1	60.0

For adaptor: adapter 1_FY2401500S1 , BLE mode

Line Under Test: Line Positive (DC Output, 110V~/60Hz)

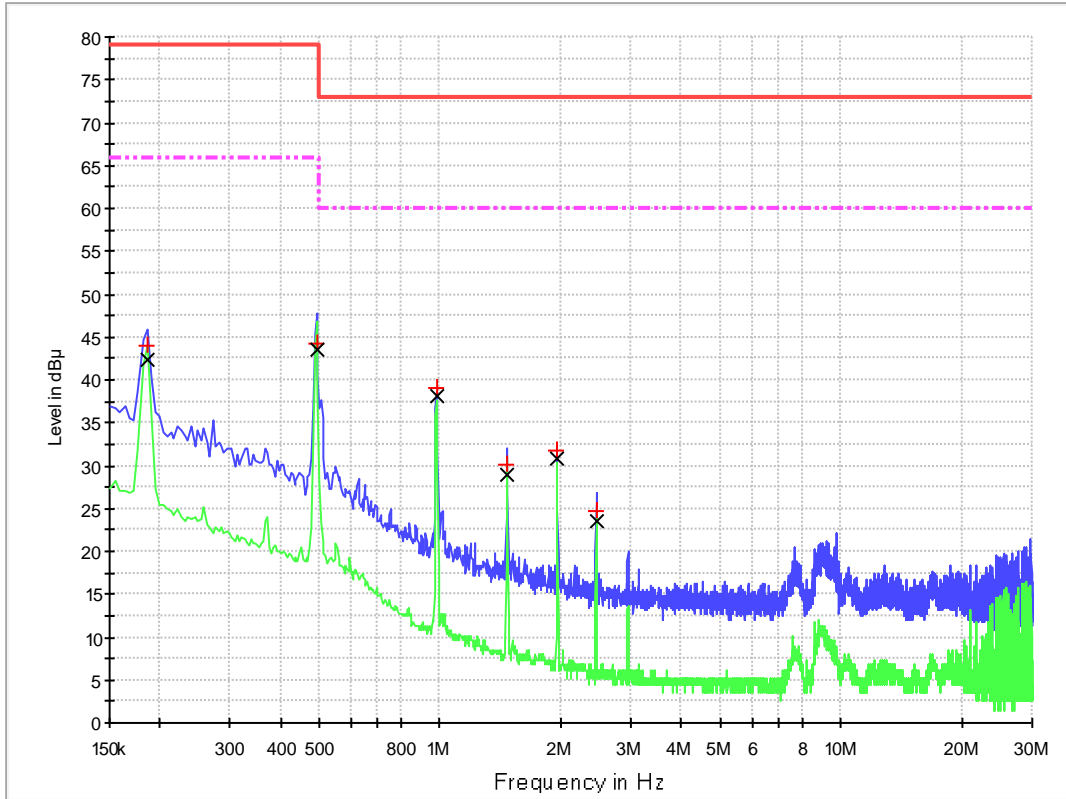

Graphical Results - Line L

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.186000	44.0	1000.0	9.000	Off	10.0	35.0	79.0
0.494000	44.2	1000.0	9.000	Off	10.0	34.8	79.0
0.982000	39.1	1000.0	9.000	Off	10.0	33.9	73.0
1.474000	30.2	1000.0	9.000	Off	10.0	42.8	73.0
1.962000	31.7	1000.0	9.000	Off	10.0	41.3	73.0
2.454000	24.8	1000.0	9.000	Off	10.0	48.2	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.186000	42.2	1000.0	9.000	Off	10.0	23.8	66.0
0.494000	43.5	1000.0	9.000	Off	10.0	22.5	66.0
0.982000	38.2	1000.0	9.000	Off	10.0	21.8	60.0
1.474000	29.0	1000.0	9.000	Off	10.0	31.0	60.0
1.962000	30.8	1000.0	9.000	Off	10.0	29.2	60.0
2.454000	23.6	1000.0	9.000	Off	10.0	36.4	60.0

For adaptor: adapter 1_FY2401500S1, BLE mode

Line Under Test: Line Negative (DC Output, 110V~/60Hz)

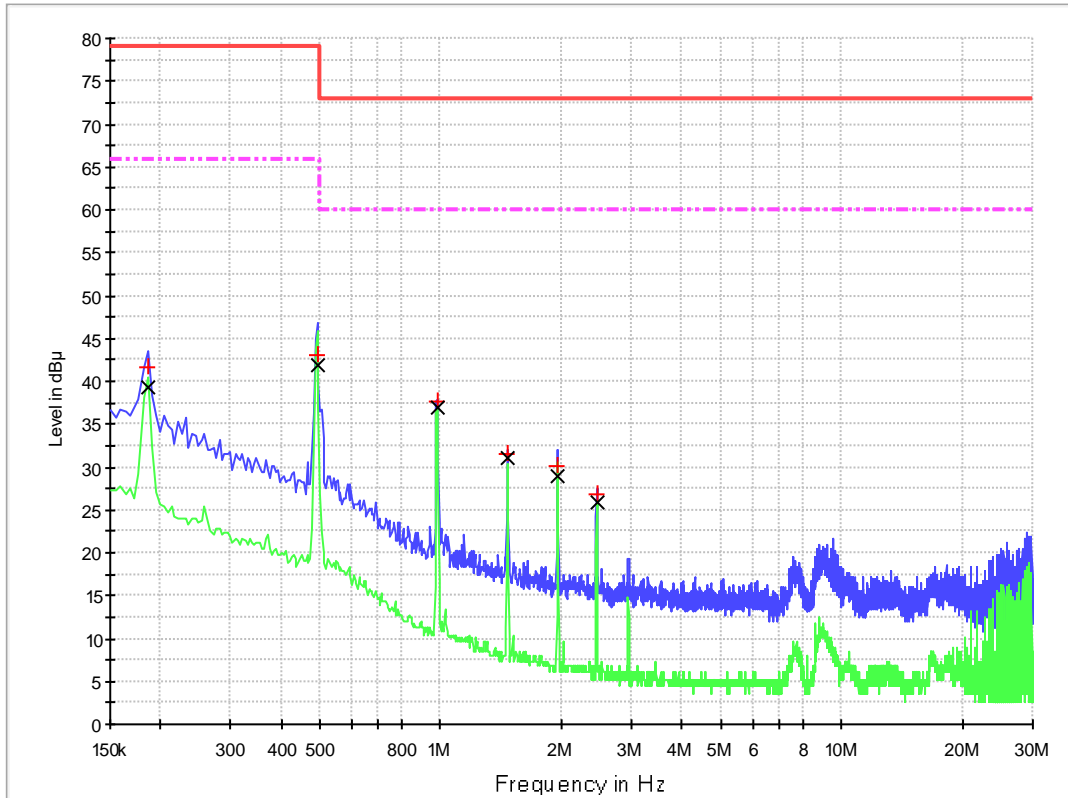

Graphical Results - Line N

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.186000	41.7	1000.0	9.000	Off	10.0	37.3	79.0
0.494000	43.1	1000.0	9.000	Off	10.0	35.9	79.0
0.982000	37.6	1000.0	9.000	Off	10.0	35.4	73.0
1.470000	31.6	1000.0	9.000	Off	10.0	41.4	73.0
1.958000	30.1	1000.0	9.000	Off	10.0	42.9	73.0
2.450000	26.8	1000.0	9.000	Off	10.0	46.2	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.186000	39.3	1000.0	9.000	Off	10.0	26.7	66.0
0.494000	41.9	1000.0	9.000	Off	10.0	24.1	66.0
0.982000	37.0	1000.0	9.000	Off	10.0	23.0	60.0
1.470000	31.0	1000.0	9.000	Off	10.0	29.0	60.0
1.958000	28.9	1000.0	9.000	Off	10.0	31.1	60.0
2.450000	25.9	1000.0	9.000	Off	10.0	34.1	60.0

For adaptor: adapter 1_FY2401500S1, BLE mode

Line Under Test: Line Positive (DC Output, 230V~/50Hz)

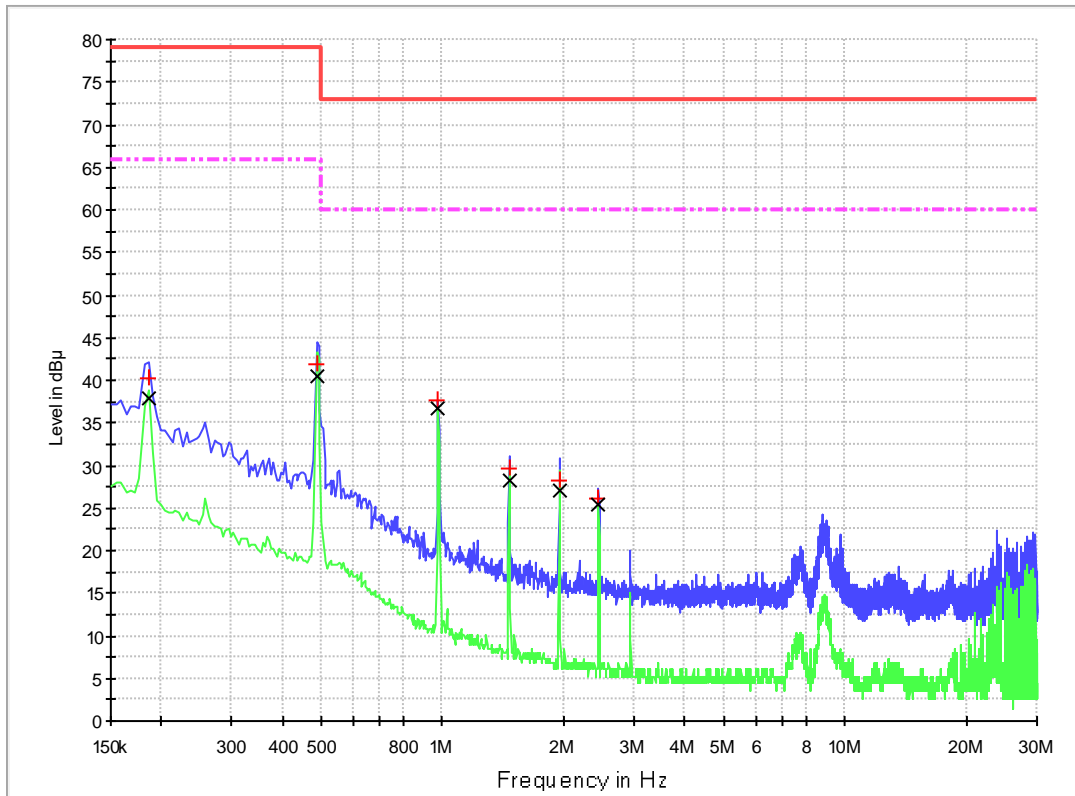

Graphical Results - Line L

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.186000	40.4	1000.0	9.000	Off	10.0	38.6	79.0
0.486000	41.8	1000.0	9.000	Off	10.0	37.2	79.0
0.978000	37.5	1000.0	9.000	Off	10.0	35.5	73.0
1.470000	29.6	1000.0	9.000	Off	10.0	43.4	73.0
1.954000	28.2	1000.0	9.000	Off	10.0	44.8	73.0
2.446000	26.2	1000.0	9.000	Off	10.0	46.8	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.186000	37.8	1000.0	9.000	Off	10.0	28.2	66.0
0.486000	40.5	1000.0	9.000	Off	10.0	25.5	66.0
0.978000	36.7	1000.0	9.000	Off	10.0	23.3	60.0
1.470000	28.2	1000.0	9.000	Off	10.0	31.8	60.0
1.954000	27.0	1000.0	9.000	Off	10.0	33.0	60.0
2.446000	25.4	1000.0	9.000	Off	10.0	34.6	60.0

For adaptor: adapter 1_FY2401500S1 , BLE mode

Line Under Test: Line Negative (DC Output, 230V~/50Hz)

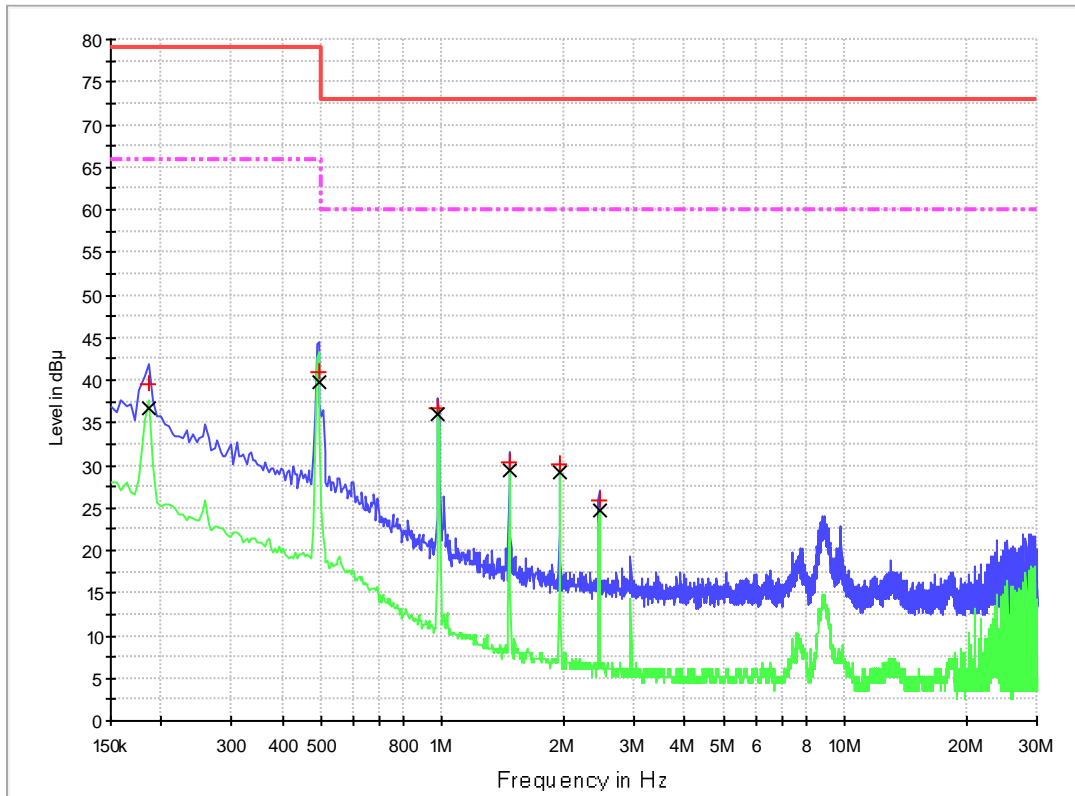

Graphical Results - Line N


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.186000	40.4	1000.0	9.000	Off	10.0	38.6	79.0
0.486000	41.8	1000.0	9.000	Off	10.0	37.2	79.0
0.978000	37.5	1000.0	9.000	Off	10.0	35.5	73.0
1.470000	29.6	1000.0	9.000	Off	10.0	43.4	73.0
1.954000	28.2	1000.0	9.000	Off	10.0	44.8	73.0
2.446000	26.2	1000.0	9.000	Off	10.0	46.8	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.186000	37.8	1000.0	9.000	Off	10.0	28.2	66.0
0.486000	40.5	1000.0	9.000	Off	10.0	25.5	66.0
0.978000	36.7	1000.0	9.000	Off	10.0	23.3	60.0
1.470000	28.2	1000.0	9.000	Off	10.0	31.8	60.0
1.954000	27.0	1000.0	9.000	Off	10.0	33.0	60.0
2.446000	25.4	1000.0	9.000	Off	10.0	34.6	60.0

For adaptor: adapter 2_ FY2401500S2, BLE mode
 Line Under Test: Line L (110V~/60Hz, Charging mode)

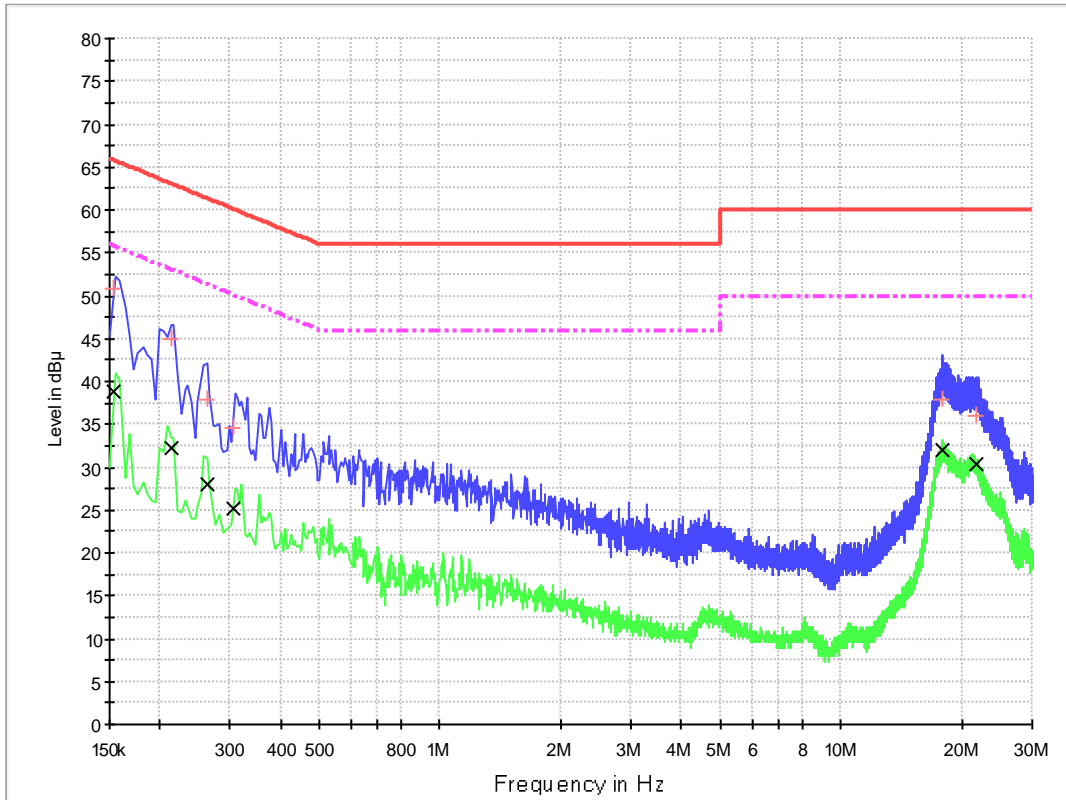

Graphical Results - Line L


QP

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)
0.154000	50.7	1000.0	9.000	Off	L1	10.0	15.0	65.8
0.214000	44.9	1000.0	9.000	Off	L1	10.0	18.1	63.0
0.262000	37.9	1000.0	9.000	Off	L1	10.0	23.4	61.4
0.306000	34.6	1000.0	9.000	Off	L1	10.0	25.5	60.1
17.850000	37.9	1000.0	9.000	Off	L1	10.0	22.1	60.0
21.722000	35.9	1000.0	9.000	Off	L1	10.0	24.1	60.0

AV

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dB μ V)
0.154000	38.9	1000.0	9.000	Off	L1	10.0	16.9	55.8
0.214000	32.3	1000.0	9.000	Off	L1	10.0	20.8	53.0
0.262000	27.9	1000.0	9.000	Off	L1	10.0	23.5	51.4
0.306000	25.2	1000.0	9.000	Off	L1	10.0	24.9	50.1
17.850000	32.0	1000.0	9.000	Off	L1	10.0	18.0	50.0
21.722000	30.2	1000.0	9.000	Off	L1	10.0	19.8	50.0

For adaptor: adapter 2_ FY2401500S2
 Line Under Test: Line N (110V~/60Hz, Charging mode)

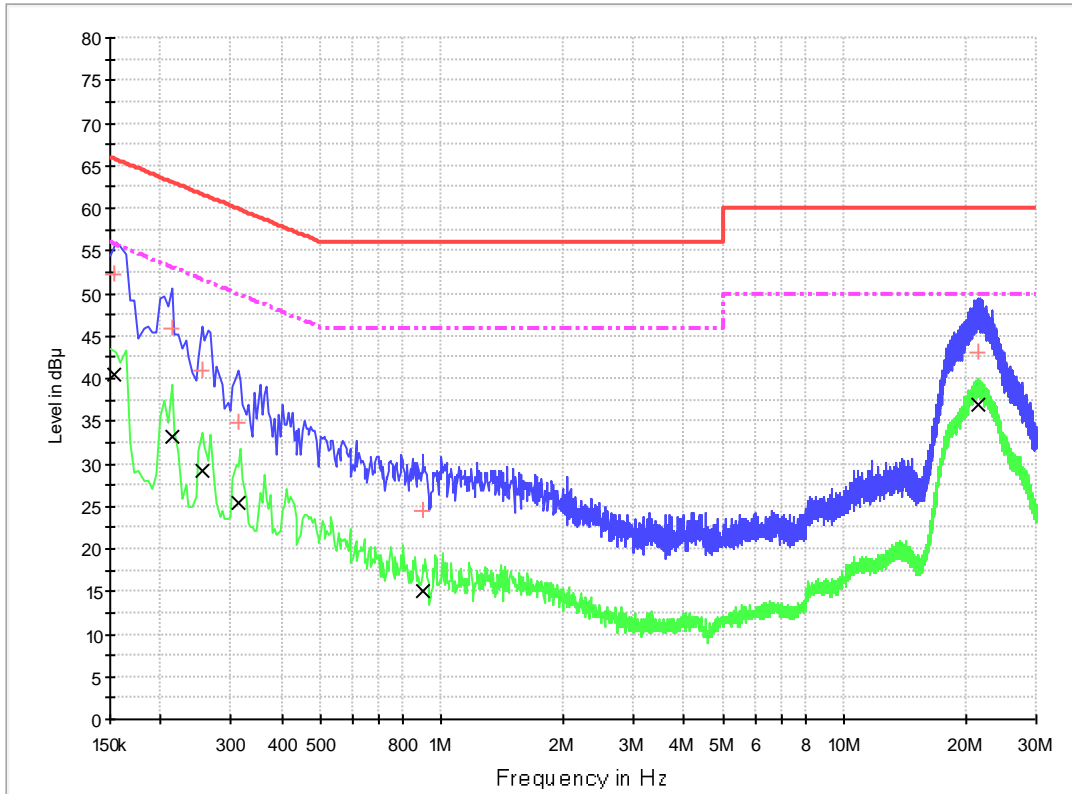

Graphical Results - Line N


QP

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)
0.154000	52.3	1000.0	9.000	Off	N	10.0	13.5	65.8
0.214000	45.9	1000.0	9.000	Off	N	10.0	17.1	63.0
0.254000	40.8	1000.0	9.000	Off	N	10.0	20.8	61.6
0.314000	34.9	1000.0	9.000	Off	N	10.0	25.0	59.9
0.898000	24.5	1000.0	9.000	Off	N	10.0	31.5	56.0
21.410000	43.1	1000.0	9.000	Off	N	10.0	16.9	60.0

AV

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dB μ V)
0.154000	40.6	1000.0	9.000	Off	N	10.0	15.2	55.8
0.214000	33.1	1000.0	9.000	Off	N	10.0	20.0	53.0
0.254000	29.1	1000.0	9.000	Off	N	10.0	22.5	51.6
0.314000	25.5	1000.0	9.000	Off	N	10.0	24.4	49.9
0.898000	15.0	1000.0	9.000	Off	N	10.0	31.0	46.0
21.410000	37.1	1000.0	9.000	Off	N	10.0	12.9	50.0

For adaptor: adapter 2_ FY2401500S2
 Line Under Test: Line L (charging mode, 230V~/50Hz)

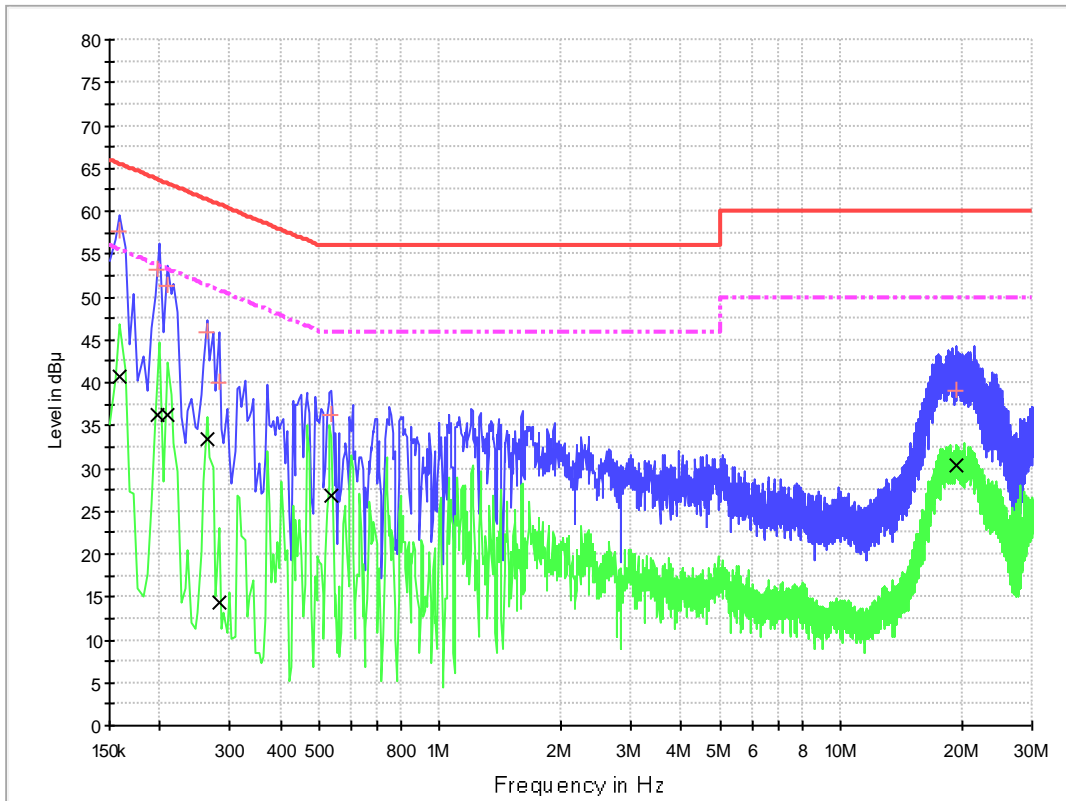

Graphical Results - Line L


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.158000	57.7	1000.0	9.000	Off	L1	10.0	7.9	65.6
0.198000	53.2	1000.0	9.000	Off	L1	10.0	10.5	63.7
0.210000	51.3	1000.0	9.000	Off	L1	10.0	11.9	63.2
0.262000	45.9	1000.0	9.000	Off	L1	10.0	15.5	61.4
0.282000	39.9	1000.0	9.000	Off	L1	10.0	20.8	60.8
0.538000	36.3	1000.0	9.000	Off	L1	10.0	19.7	56.0
19.506000	39.0	1000.0	9.000	Off	L1	10.0	21.0	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.158000	40.6	1000.0	9.000	Off	L1	10.0	15.0	55.6
0.198000	36.2	1000.0	9.000	Off	L1	10.0	17.5	53.7
0.210000	36.2	1000.0	9.000	Off	L1	10.0	17.0	53.2
0.262000	33.5	1000.0	9.000	Off	L1	10.0	17.9	51.4
0.282000	14.4	1000.0	9.000	Off	L1	10.0	36.3	50.8
0.538000	26.8	1000.0	9.000	Off	L1	10.0	19.2	46.0
19.506000	30.3	1000.0	9.000	Off	L1	10.0	19.7	50.0

For adaptor: adapter 2_ FY2401500S2, BLE mode
 Line Under Test: Line N (charging mode, 230V~/50Hz)

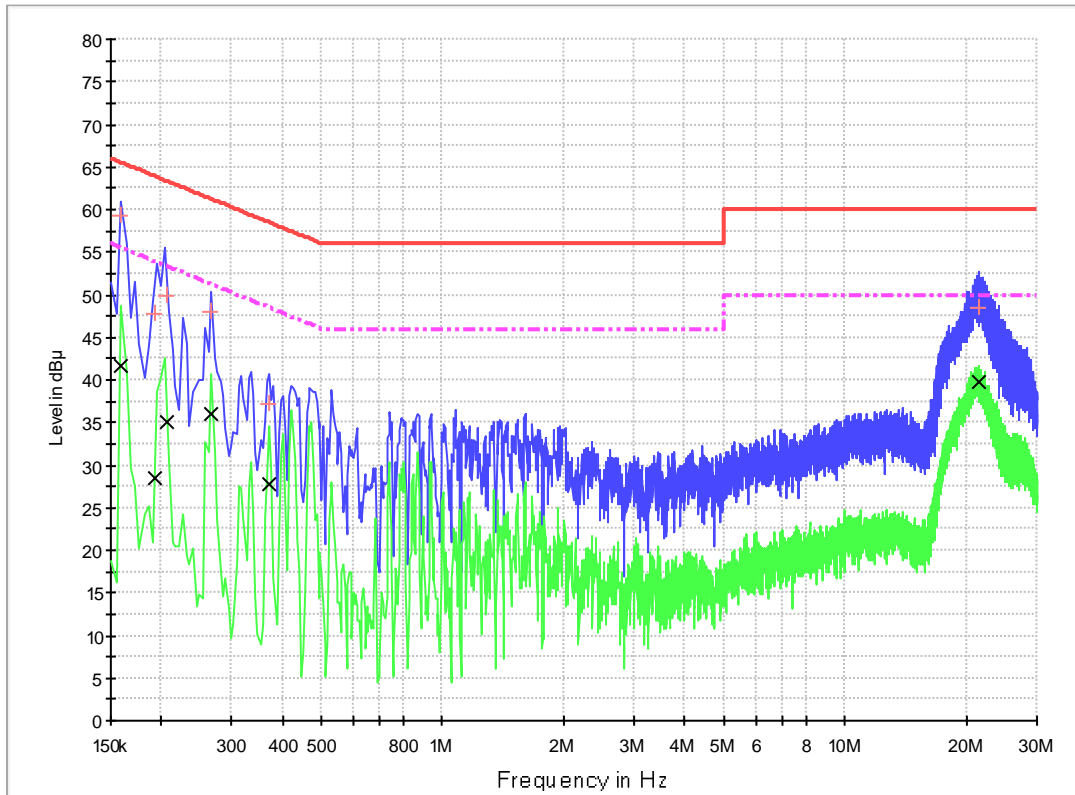

Graphical Results - Line N


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.158000	59.3	1000.0	9.000	Off	N	10.0	6.2	65.6
0.194000	47.8	1000.0	9.000	Off	N	10.0	16.1	63.9
0.206000	49.9	1000.0	9.000	Off	N	10.0	13.4	63.4
0.266000	47.9	1000.0	9.000	Off	N	10.0	13.3	61.2
0.370000	37.1	1000.0	9.000	Off	N	10.0	21.4	58.5
21.630000	48.4	1000.0	9.000	Off	N	10.0	11.6	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.158000	41.7	1000.0	9.000	Off	N	10.0	13.9	55.6
0.194000	28.5	1000.0	9.000	Off	N	10.0	25.4	53.9
0.206000	35.0	1000.0	9.000	Off	N	10.0	18.4	53.4
0.266000	36.0	1000.0	9.000	Off	N	10.0	15.2	51.2
0.370000	27.8	1000.0	9.000	Off	N	10.0	20.7	48.5
21.630000	39.7	1000.0	9.000	Off	N	10.0	10.3	50.0

adaptor: adapter 2_ FY2401500S2
 Line Under Test: Line L (running mode, 110V~/60Hz)

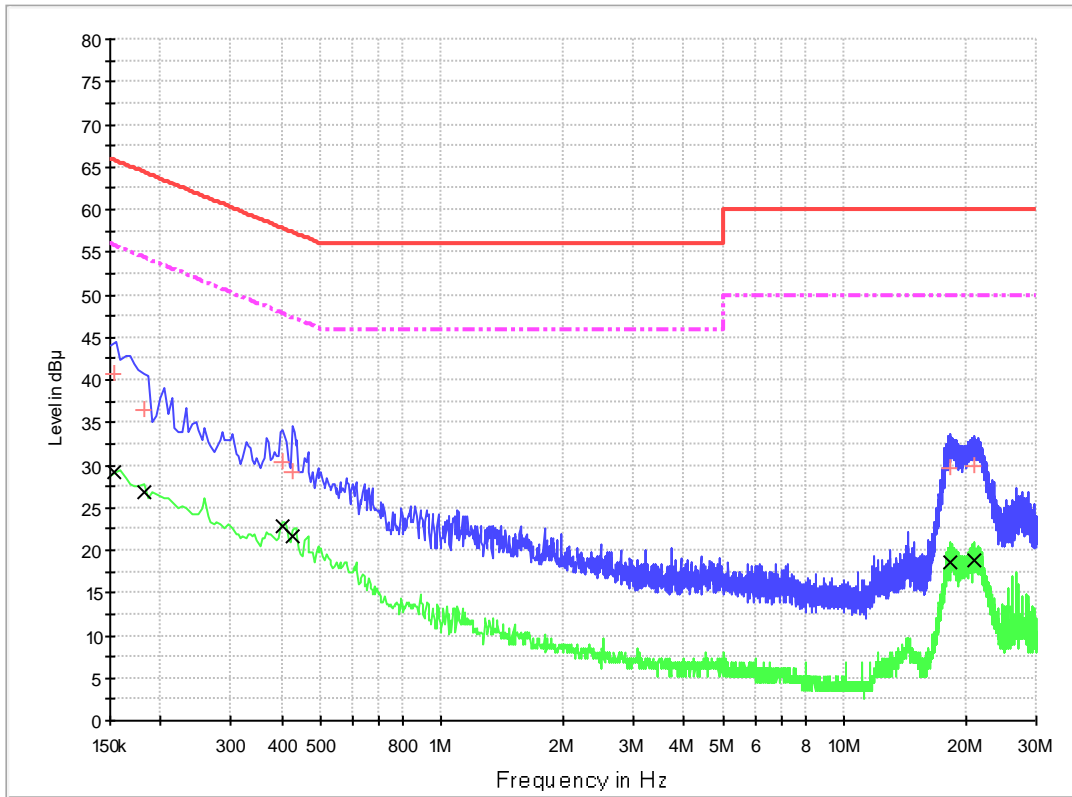

Graphical Results - Line L

QP


Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)
0.154000	40.7	1000.0	9.000	Off	L1	10.0	25.1	65.8
0.182000	36.4	1000.0	9.000	Off	L1	10.0	28.0	64.4
0.402000	30.4	1000.0	9.000	Off	L1	10.0	27.4	57.8
0.426000	29.1	1000.0	9.000	Off	L1	10.0	28.2	57.3
18.270000	29.6	1000.0	9.000	Off	L1	10.0	30.4	60.0
20.986000	29.9	1000.0	9.000	Off	L1	10.0	30.1	60.0

AV

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dB μ V)
0.154000	29.1	1000.0	9.000	Off	L1	10.0	26.7	55.8
0.182000	26.9	1000.0	9.000	Off	L1	10.0	27.5	54.4
0.402000	22.8	1000.0	9.000	Off	L1	10.0	25.0	47.8
0.426000	21.6	1000.0	9.000	Off	L1	10.0	25.7	47.3
18.270000	18.6	1000.0	9.000	Off	L1	10.0	31.4	50.0
20.986000	18.8	1000.0	9.000	Off	L1	10.0	31.2	50.0

For adaptor: adapter 2_ FY2401500S2, BLE mode

Line Under Test: Line N (running mode, 110V~/60Hz)

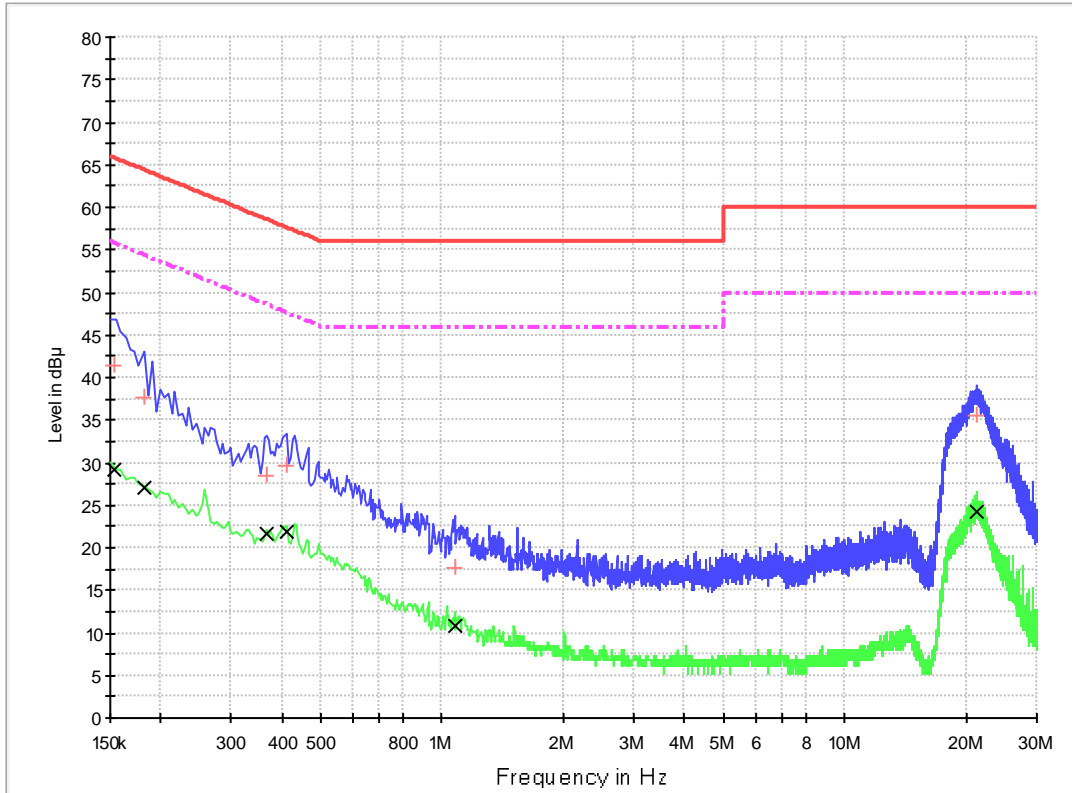

Graphical Results - Line N

QP


Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)
0.154000	41.5	1000.0	9.000	Off	N	10.0	24.3	65.8
0.182000	37.7	1000.0	9.000	Off	N	10.0	26.7	64.4
0.366000	28.4	1000.0	9.000	Off	N	10.0	30.2	58.6
0.410000	29.6	1000.0	9.000	Off	N	10.0	28.0	57.6
1.074000	17.7	1000.0	9.000	Off	N	10.0	38.3	56.0
21.234000	35.5	1000.0	9.000	Off	N	10.0	24.5	60.0

AV

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dB μ V)
0.154000	29.2	1000.0	9.000	Off	N	10.0	26.6	55.8
0.182000	27.2	1000.0	9.000	Off	N	10.0	27.2	54.4
0.366000	21.6	1000.0	9.000	Off	N	10.0	27.0	48.6
0.410000	22.0	1000.0	9.000	Off	N	10.0	25.7	47.6
1.074000	10.9	1000.0	9.000	Off	N	10.0	35.1	46.0
21.234000	24.2	1000.0	9.000	Off	N	10.0	25.8	50.0

For adaptor: adapter 2_ FY2401500S2, BLE mode

Line Under Test: Line L (running mode, 230V~/50Hz)

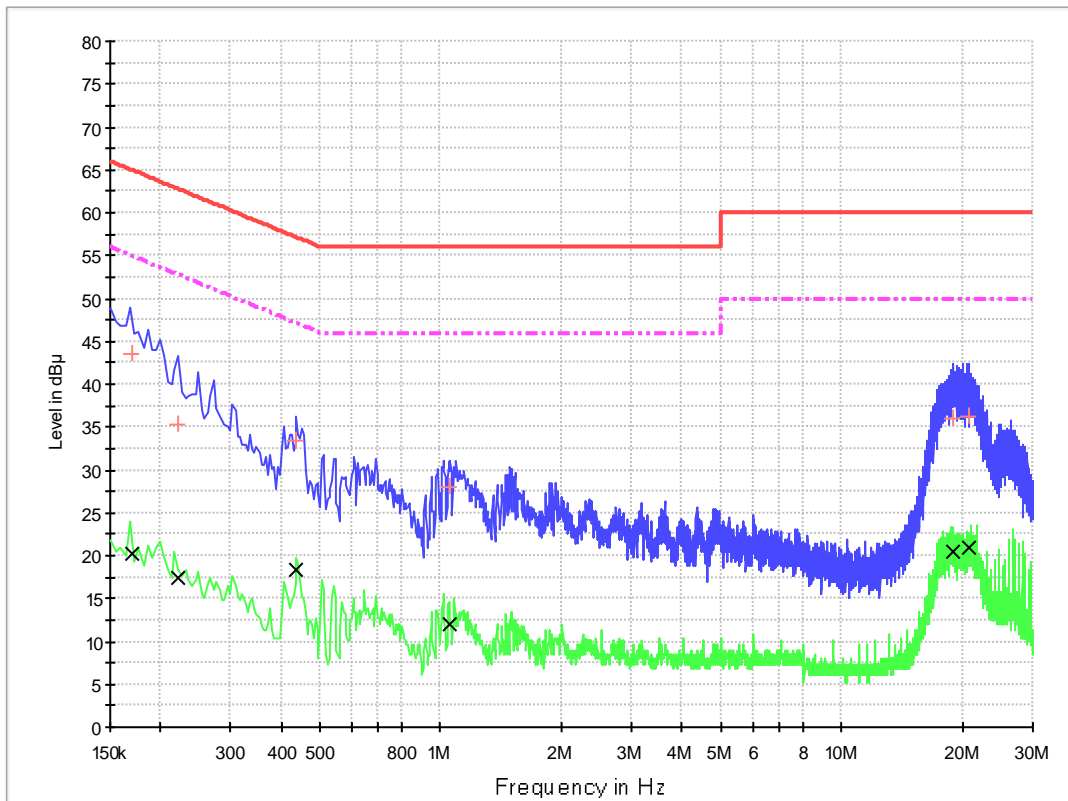

Graphical Results - Line L


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.170000	43.5	1000.0	9.000	Off	L1	10.0	21.5	65.0
0.222000	35.2	1000.0	9.000	Off	L1	10.0	27.5	62.7
0.438000	33.3	1000.0	9.000	Off	L1	10.0	23.8	57.1
1.058000	28.0	1000.0	9.000	Off	L1	10.0	28.0	56.0
19.010000	36.1	1000.0	9.000	Off	L1	10.0	23.9	60.0
20.878000	36.3	1000.0	9.000	Off	L1	10.0	23.7	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.170000	20.3	1000.0	9.000	Off	L1	10.0	34.6	55.0
0.222000	17.4	1000.0	9.000	Off	L1	10.0	35.4	52.7
0.438000	18.3	1000.0	9.000	Off	L1	10.0	28.8	47.1
1.058000	12.1	1000.0	9.000	Off	L1	10.0	33.9	46.0
19.010000	20.5	1000.0	9.000	Off	L1	10.0	29.5	50.0
20.878000	20.9	1000.0	9.000	Off	L1	10.0	29.1	50.0

For adaptor: adapter 2_ FY2401500S2 , BLE mode
 Line Under Test: Line N (running mode, 230V~/50Hz)

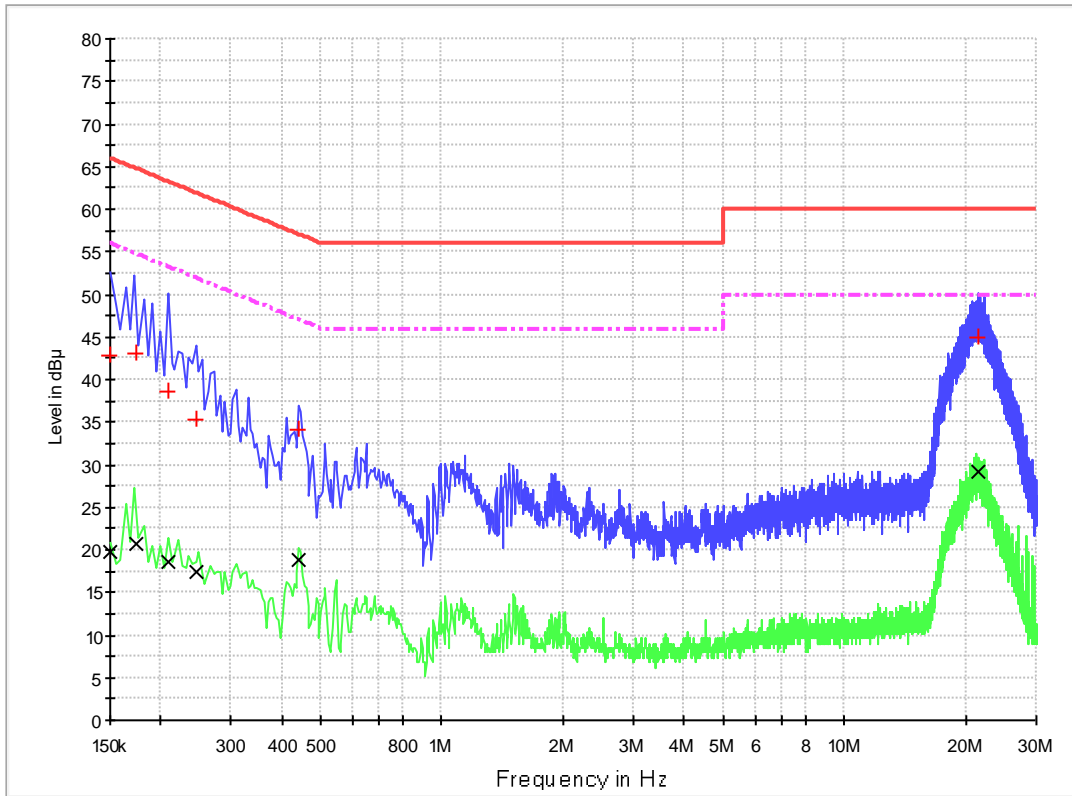

Graphical Results - Line N

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	42.9	1000.0	9.000	Off	N	10.0	23.1	66.0
0.174000	43.0	1000.0	9.000	Off	N	10.0	21.7	64.8
0.210000	38.7	1000.0	9.000	Off	N	10.0	24.5	63.2
0.246000	35.3	1000.0	9.000	Off	N	10.0	26.6	61.9
0.442000	34.1	1000.0	9.000	Off	N	10.0	22.9	57.0
21.486000	44.8	1000.0	9.000	Off	N	10.0	15.2	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	19.8	1000.0	9.000	Off	N	10.0	36.2	56.0
0.174000	20.6	1000.0	9.000	Off	N	10.0	34.2	54.8
0.210000	18.6	1000.0	9.000	Off	N	10.0	34.6	53.2
0.246000	17.4	1000.0	9.000	Off	N	10.0	34.5	51.9
0.442000	18.9	1000.0	9.000	Off	N	10.0	28.1	47.0
21.486000	29.1	1000.0	9.000	Off	N	10.0	20.9	50.0

For adaptor: adapter 2_ FY2401500S2, BLE mode

Line Under Test: Line Positive (DC Input, charging mode, 110V~/60Hz)

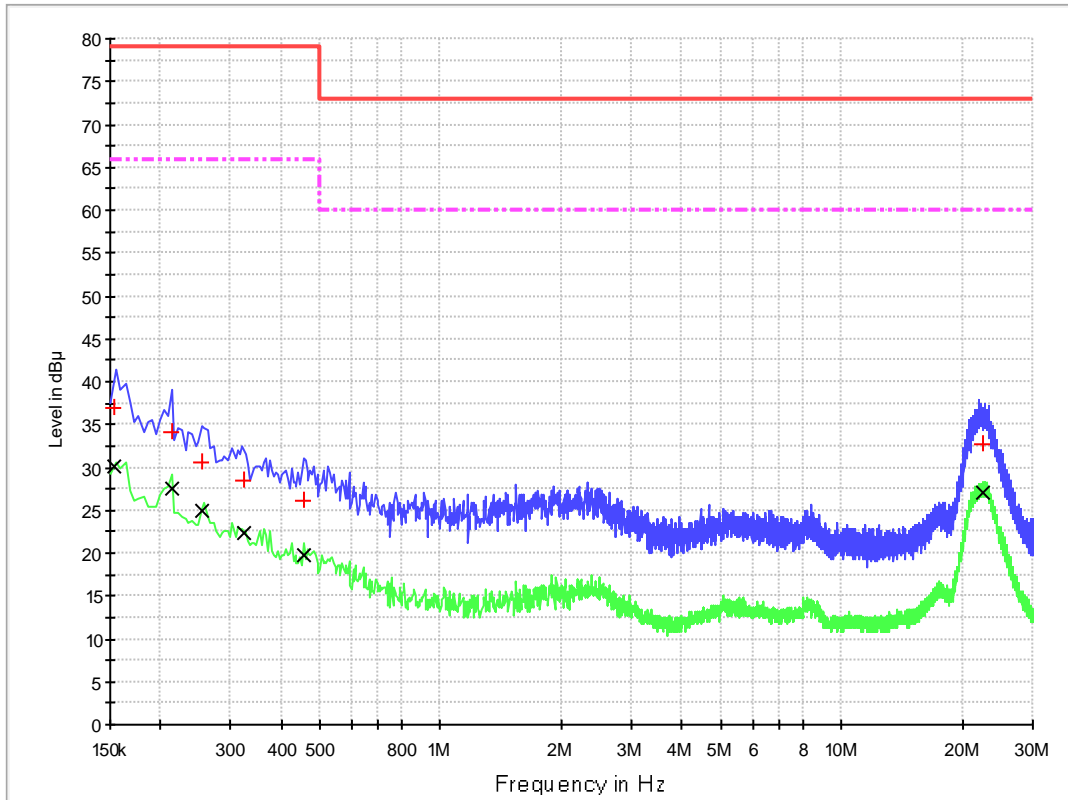

Graphical Results - Line L


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.154000	36.9	1000.0	9.000	Off	10.0	42.1	79.0
0.214000	34.1	1000.0	9.000	Off	10.0	44.9	79.0
0.254000	30.7	1000.0	9.000	Off	10.0	48.3	79.0
0.322000	28.5	1000.0	9.000	Off	10.0	50.5	79.0
0.458000	26.2	1000.0	9.000	Off	10.0	52.8	79.0
22.578000	32.8	1000.0	9.000	Off	10.0	40.2	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.154000	30.2	1000.0	9.000	Off	10.0	35.8	66.0
0.214000	27.6	1000.0	9.000	Off	10.0	38.4	66.0
0.254000	24.9	1000.0	9.000	Off	10.0	41.1	66.0
0.322000	22.3	1000.0	9.000	Off	10.0	43.7	66.0
0.458000	19.8	1000.0	9.000	Off	10.0	46.2	66.0
22.578000	27.0	1000.0	9.000	Off	10.0	33.0	60.0

For adaptor: adapter 2_ FY2401500S2
 Line Under Test: Line Negative (DC Input, charging mode, 110V~/60Hz)

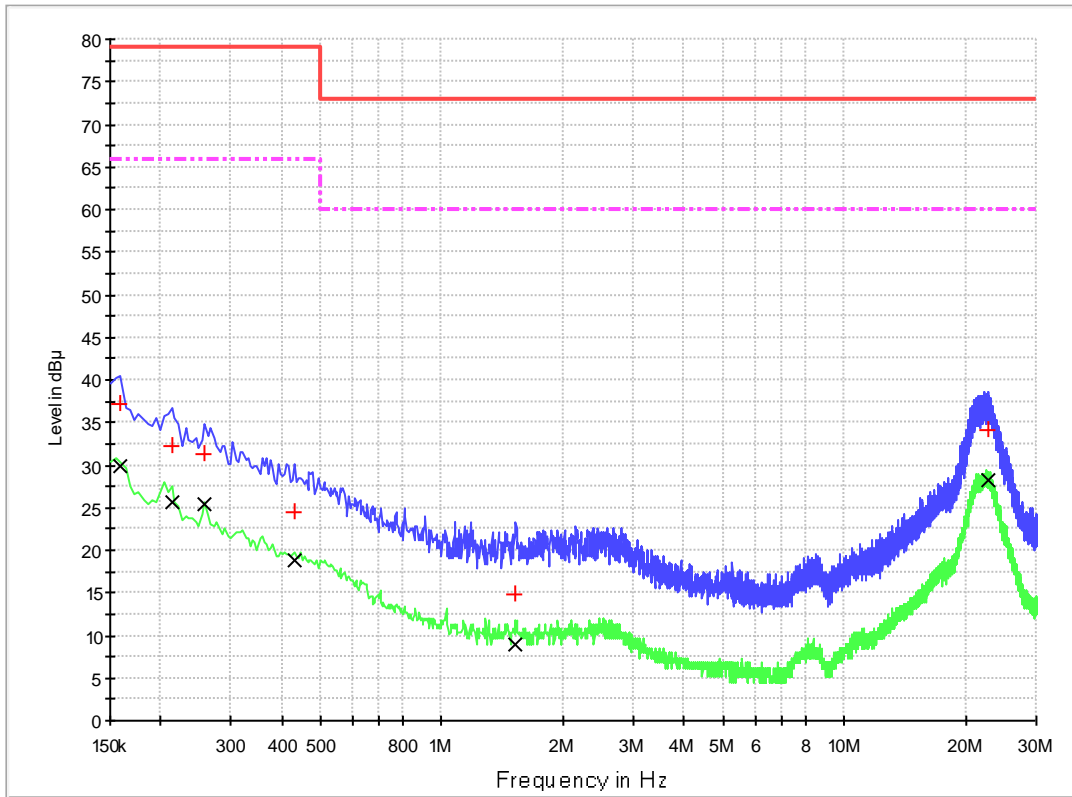

Graphical Results - Line N

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.158000	37.2	1000.0	9.000	Off	10.0	41.8	79.0
0.214000	32.2	1000.0	9.000	Off	10.0	46.8	79.0
0.258000	31.3	1000.0	9.000	Off	10.0	47.7	79.0
0.430000	24.4	1000.0	9.000	Off	10.0	54.6	79.0
1.526000	14.8	1000.0	9.000	Off	10.0	58.2	73.0
22.826000	34.0	1000.0	9.000	Off	10.0	39.0	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.158000	29.9	1000.0	9.000	Off	10.0	36.1	66.0
0.214000	25.7	1000.0	9.000	Off	10.0	40.3	66.0
0.258000	25.4	1000.0	9.000	Off	10.0	40.6	66.0
0.430000	18.8	1000.0	9.000	Off	10.0	47.2	66.0
1.526000	8.8	1000.0	9.000	Off	10.0	51.2	60.0
22.826000	28.2	1000.0	9.000	Off	10.0	31.8	60.0

For adaptor: adapter 2_ FY2401500S2

Line Under Test: Line Positive (DC Input, running mode, 110V~/60Hz)

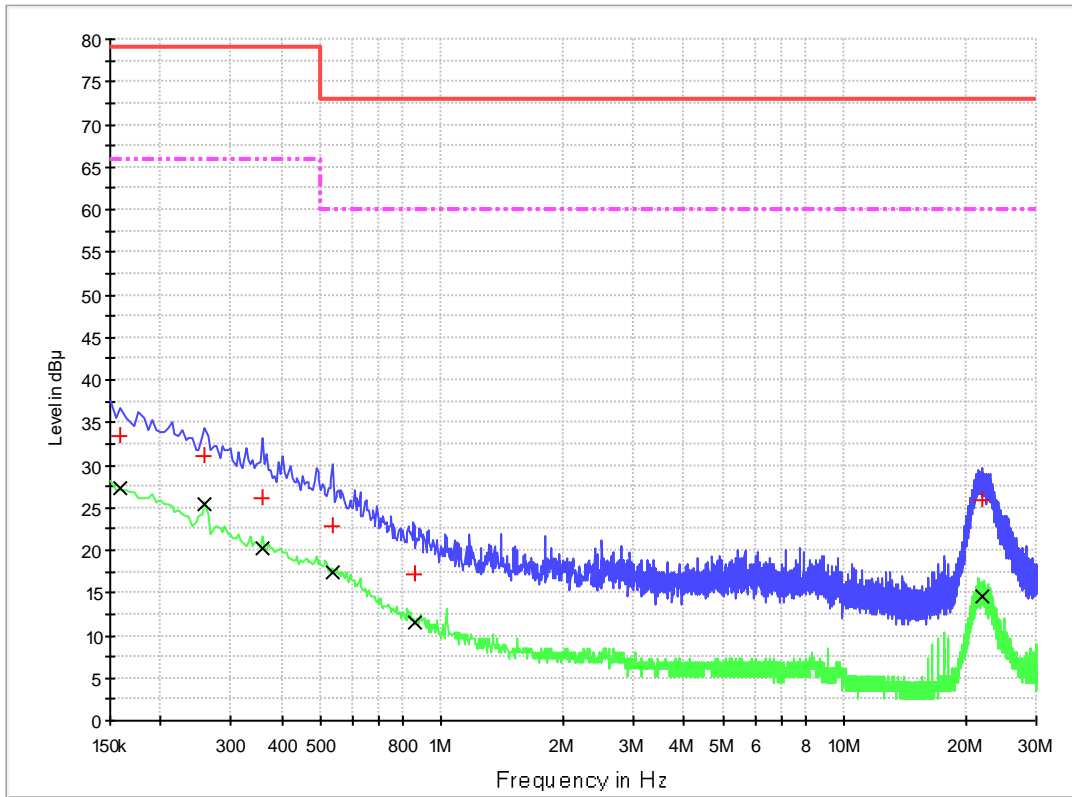

Graphical Results - Line L

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.158000	33.4	1000.0	9.000	Off	10.0	45.6	79.0
0.258000	31.1	1000.0	9.000	Off	10.0	47.9	79.0
0.358000	26.0	1000.0	9.000	Off	10.0	53.0	79.0
0.538000	22.9	1000.0	9.000	Off	10.0	50.1	73.0
0.854000	17.1	1000.0	9.000	Off	10.0	55.9	73.0
21.954000	25.9	1000.0	9.000	Off	10.0	47.1	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.158000	27.2	1000.0	9.000	Off	10.0	38.8	66.0
0.258000	25.3	1000.0	9.000	Off	10.0	40.7	66.0
0.358000	20.2	1000.0	9.000	Off	10.0	45.8	66.0
0.538000	17.3	1000.0	9.000	Off	10.0	42.7	60.0
0.854000	11.6	1000.0	9.000	Off	10.0	48.4	60.0
21.954000	14.7	1000.0	9.000	Off	10.0	45.3	60.0

For adaptor: adapter 2_ FY2401500S2

Line Under Test: Line Negative (DC Input, running mode, 110V~/60Hz)

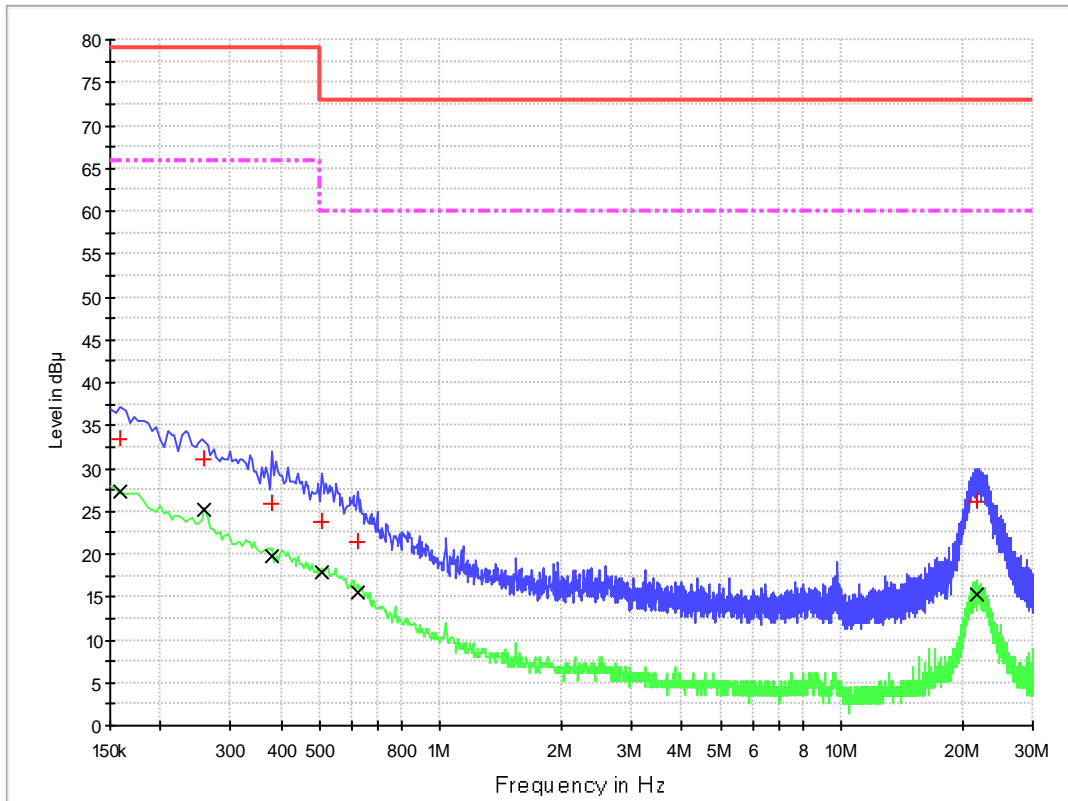

Graphical Results - Line N

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.158000	33.4	1000.0	9.000	Off	10.0	45.6	79.0
0.258000	31.1	1000.0	9.000	Off	10.0	47.9	79.0
0.378000	25.9	1000.0	9.000	Off	10.0	53.1	79.0
0.506000	23.7	1000.0	9.000	Off	10.0	49.3	73.0
0.622000	21.5	1000.0	9.000	Off	10.0	51.5	73.0
21.810000	26.2	1000.0	9.000	Off	10.0	46.8	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.158000	27.2	1000.0	9.000	Off	10.0	38.8	66.0
0.258000	25.2	1000.0	9.000	Off	10.0	40.8	66.0
0.378000	19.9	1000.0	9.000	Off	10.0	46.2	66.0
0.506000	17.8	1000.0	9.000	Off	10.0	42.2	60.0
0.622000	15.6	1000.0	9.000	Off	10.0	44.4	60.0
21.810000	15.2	1000.0	9.000	Off	10.0	44.8	60.0

For adaptor: adapter 2_ FY2401500S2

Line Under Test: Line Positive (DC Input, charging mode, 230V~/50Hz)

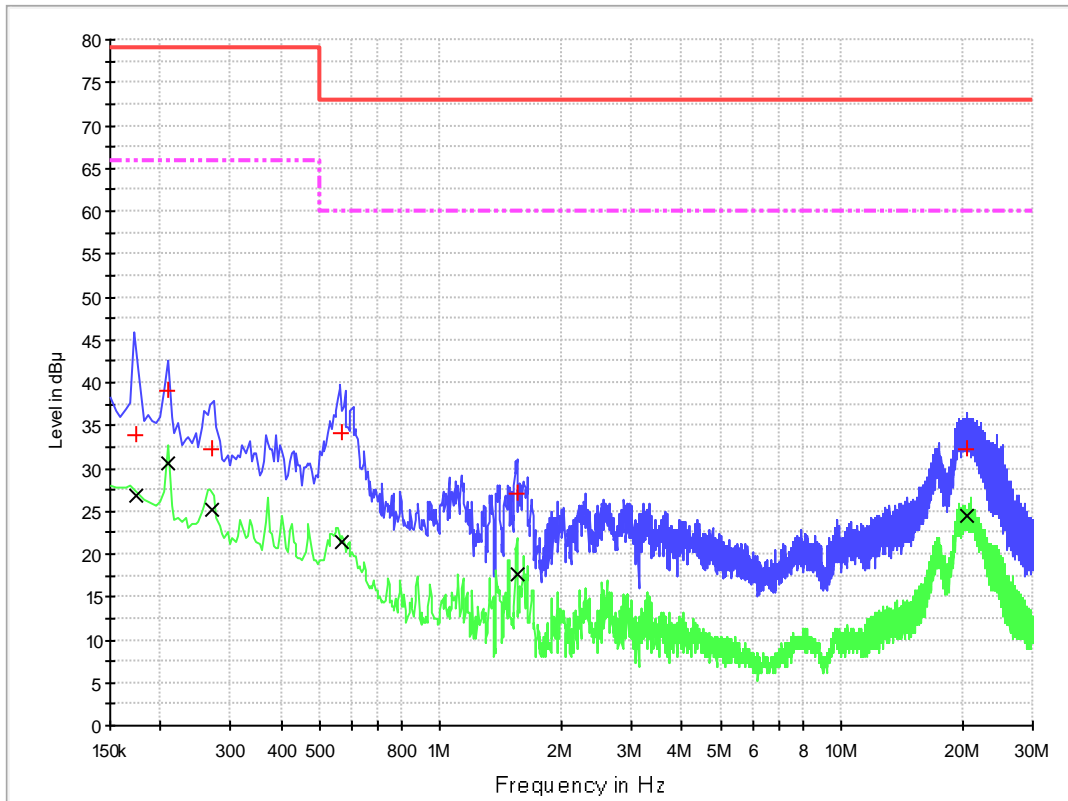

Graphical Results - Line L


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.174000	33.8	1000.0	9.000	Off	10.0	45.2	79.0
0.210000	39.1	1000.0	9.000	Off	10.0	39.9	79.0
0.270000	32.3	1000.0	9.000	Off	10.0	46.7	79.0
0.566000	34.1	1000.0	9.000	Off	10.0	38.9	73.0
1.550000	27.1	1000.0	9.000	Off	10.0	45.9	73.0
20.658000	32.2	1000.0	9.000	Off	10.0	40.8	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.174000	26.8	1000.0	9.000	Off	10.0	39.2	66.0
0.210000	30.7	1000.0	9.000	Off	10.0	35.3	66.0
0.270000	25.1	1000.0	9.000	Off	10.0	40.9	66.0
0.566000	21.5	1000.0	9.000	Off	10.0	38.5	60.0
1.550000	17.6	1000.0	9.000	Off	10.0	42.4	60.0
20.658000	24.4	1000.0	9.000	Off	10.0	35.6	60.0

For adaptor: adapter 2_ FY2401500S2
 Line Under Test: Line Negative (DC Input, charging mode, 230V~/50Hz)

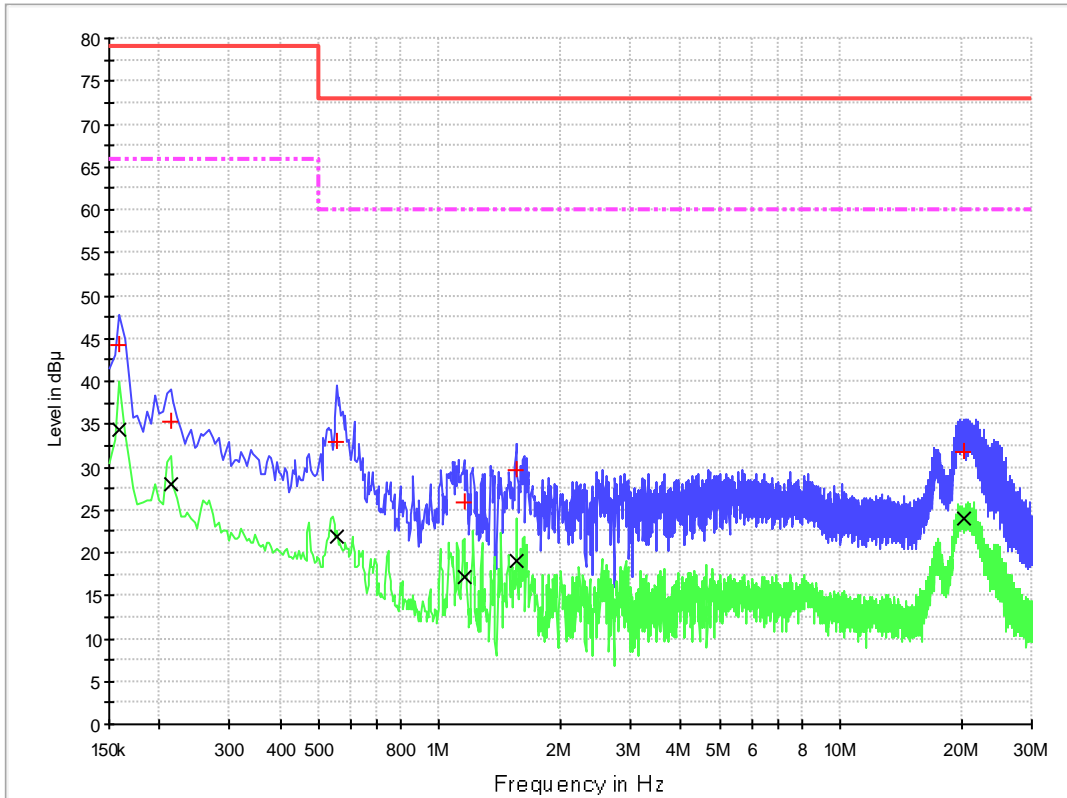

Graphical Results - Line N

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.158000	44.1	1000.0	9.000	Off	10.0	34.9	79.0
0.214000	35.3	1000.0	9.000	Off	10.0	43.7	79.0
0.554000	32.8	1000.0	9.000	Off	10.0	40.2	73.0
1.150000	25.9	1000.0	9.000	Off	10.0	47.1	73.0
1.554000	29.6	1000.0	9.000	Off	10.0	43.4	73.0
20.298000	31.9	1000.0	9.000	Off	10.0	41.1	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.158000	34.3	1000.0	9.000	Off	10.0	31.7	66.0
0.214000	28.0	1000.0	9.000	Off	10.0	38.0	66.0
0.554000	22.0	1000.0	9.000	Off	10.0	38.0	60.0
1.150000	17.2	1000.0	9.000	Off	10.0	42.8	60.0
1.554000	19.1	1000.0	9.000	Off	10.0	40.9	60.0
20.298000	23.9	1000.0	9.000	Off	10.0	36.1	60.0

For adaptor: adapter 2_ FY2401500S2

Line Under Test: Line Positive (DC Input, running mode, 230V~/50Hz)

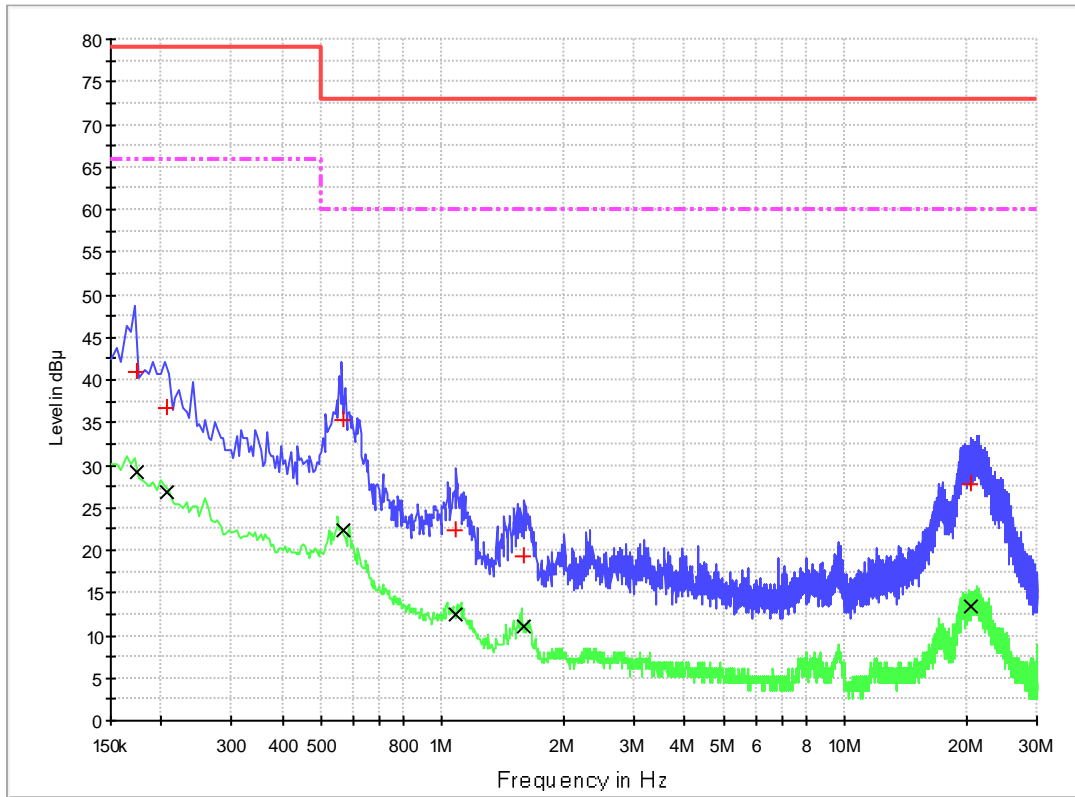

Graphical Results - Line L

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.174000	40.9	1000.0	9.000	Off	10.0	38.1	79.0
0.206000	36.8	1000.0	9.000	Off	10.0	42.2	79.0
0.566000	35.3	1000.0	9.000	Off	10.0	37.7	73.0
1.082000	22.3	1000.0	9.000	Off	10.0	50.7	73.0
1.598000	19.2	1000.0	9.000	Off	10.0	53.8	73.0
20.446000	27.7	1000.0	9.000	Off	10.0	45.3	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.174000	29.2	1000.0	9.000	Off	10.0	36.8	66.0
0.206000	26.7	1000.0	9.000	Off	10.0	39.3	66.0
0.566000	22.3	1000.0	9.000	Off	10.0	37.7	60.0
1.082000	12.4	1000.0	9.000	Off	10.0	47.6	60.0
1.598000	11.0	1000.0	9.000	Off	10.0	49.0	60.0
20.446000	13.4	1000.0	9.000	Off	10.0	46.6	60.0

For adaptor: adapter 2_ FY2401500S2

Line Under Test: Line Negative (DC Input, running mode, 230V~/50Hz)

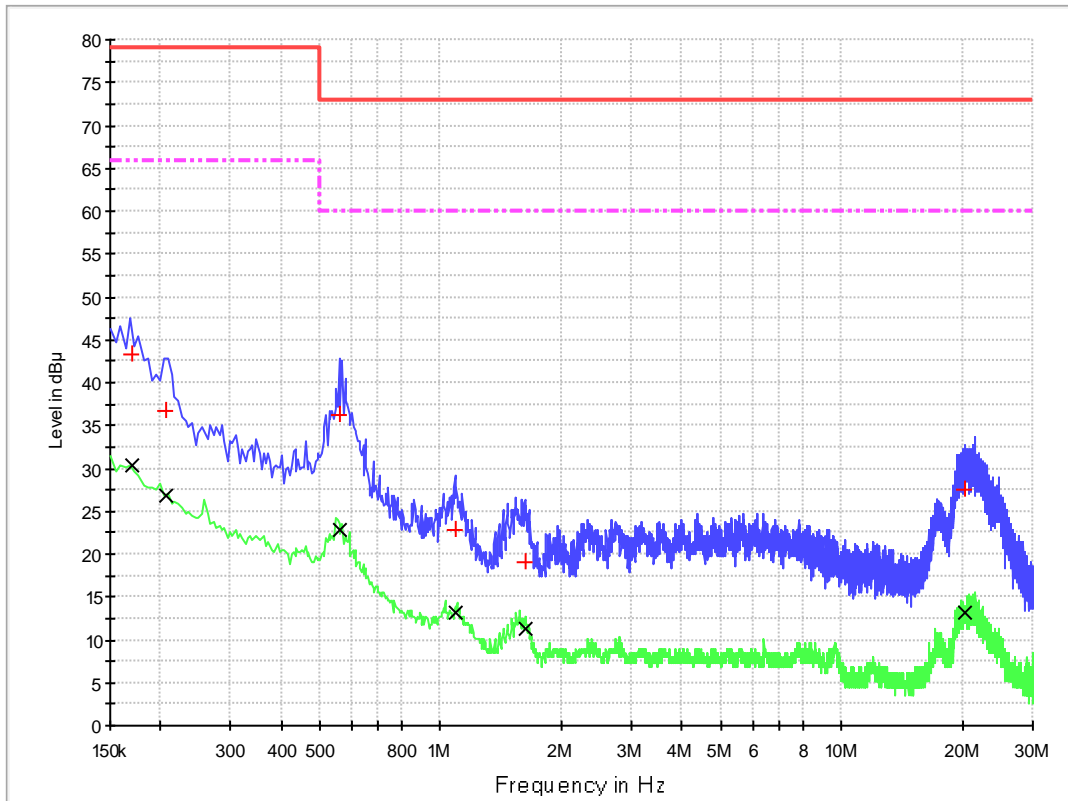

Graphical Results - Line N

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.170000	43.2	1000.0	9.000	Off	10.0	35.8	79.0
0.206000	36.7	1000.0	9.000	Off	10.0	42.3	79.0
0.558000	36.2	1000.0	9.000	Off	10.0	36.8	73.0
1.086000	22.8	1000.0	9.000	Off	10.0	50.2	73.0
1.622000	19.1	1000.0	9.000	Off	10.0	53.9	73.0
20.298000	27.5	1000.0	9.000	Off	10.0	45.5	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.170000	30.3	1000.0	9.000	Off	10.0	35.7	66.0
0.206000	26.8	1000.0	9.000	Off	10.0	39.2	66.0
0.558000	22.9	1000.0	9.000	Off	10.0	37.1	60.0
1.086000	13.2	1000.0	9.000	Off	10.0	46.8	60.0
1.622000	11.2	1000.0	9.000	Off	10.0	48.8	60.0
20.298000	13.2	1000.0	9.000	Off	10.0	46.8	60.0

For adaptor: adapter 2_ FY2401500S2, BLE mode

Line Under Test: Line Positive (DC Output, charging mode, 110V~/60Hz)

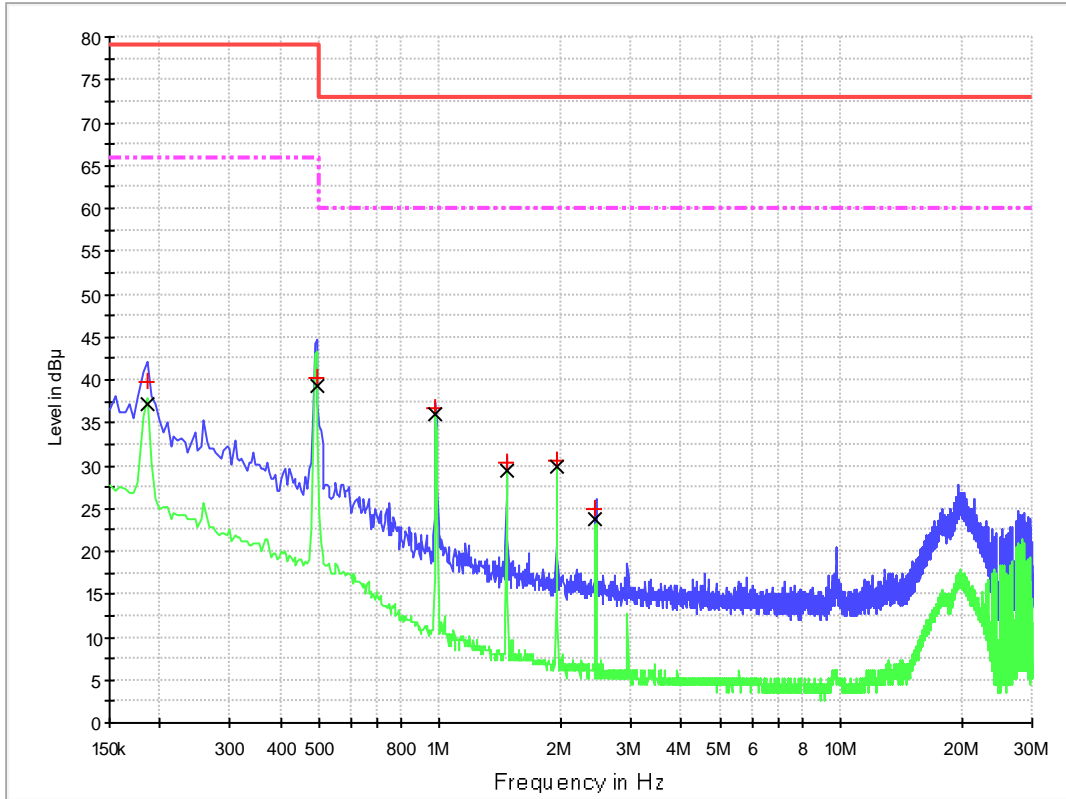

Graphical Results - Line L

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.186000	39.8	1000.0	9.000	Off	10.0	39.2	79.0
0.494000	40.2	1000.0	9.000	Off	10.0	38.8	79.0
0.978000	36.7	1000.0	9.000	Off	10.0	36.3	73.0
1.470000	30.5	1000.0	9.000	Off	10.0	42.5	73.0
1.958000	30.5	1000.0	9.000	Off	10.0	42.5	73.0
2.446000	24.9	1000.0	9.000	Off	10.0	48.1	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.186000	37.1	1000.0	9.000	Off	10.0	28.9	66.0
0.494000	39.4	1000.0	9.000	Off	10.0	26.6	66.0
0.978000	36.1	1000.0	9.000	Off	10.0	23.9	60.0
1.470000	29.4	1000.0	9.000	Off	10.0	30.6	60.0
1.958000	29.8	1000.0	9.000	Off	10.0	30.2	60.0
2.446000	23.8	1000.0	9.000	Off	10.0	36.2	60.0

For adaptor: adapter 2_ FY2401500S2 , BLE mode

Line Under Test: Line Negative (DC Output, charging mode, 110V~/60Hz)

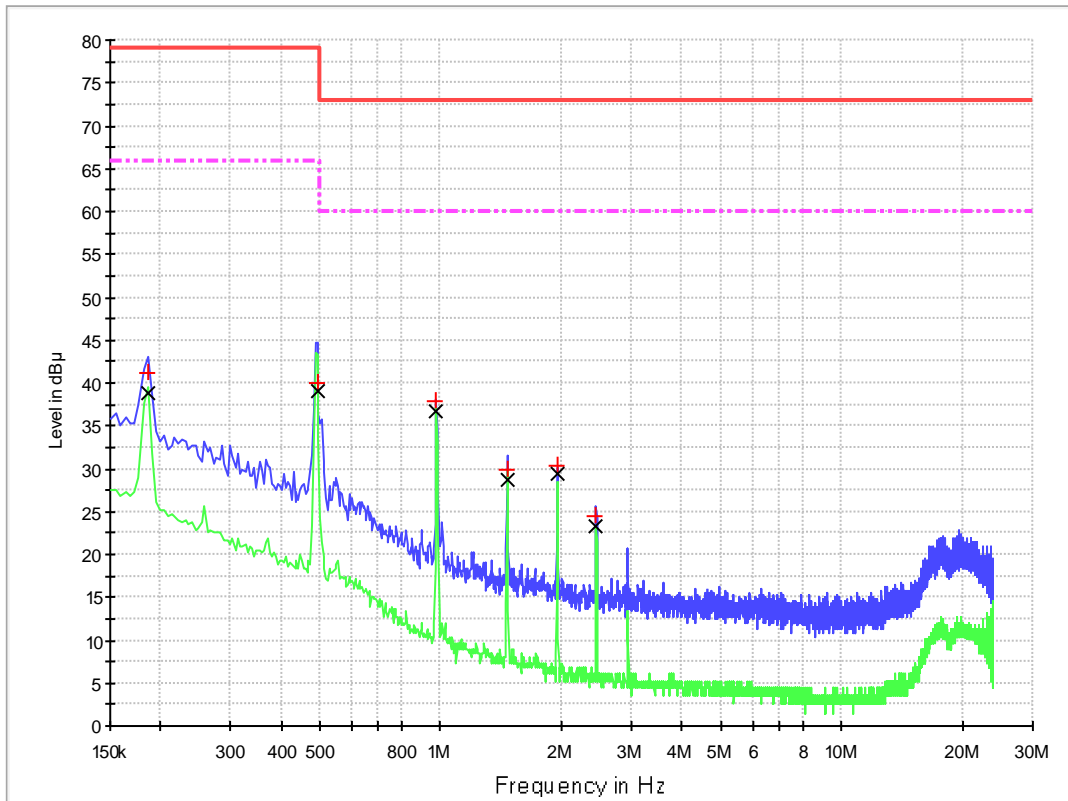

Graphical Results - Line N

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.186000	41.1	1000.0	9.000	Off	10.0	37.9	79.0
0.494000	40.0	1000.0	9.000	Off	10.0	39.0	79.0
0.978000	37.8	1000.0	9.000	Off	10.0	35.2	73.0
1.470000	29.8	1000.0	9.000	Off	10.0	43.2	73.0
1.958000	30.3	1000.0	9.000	Off	10.0	42.7	73.0
2.446000	24.4	1000.0	9.000	Off	10.0	48.6	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.186000	38.8	1000.0	9.000	Off	10.0	27.2	66.0
0.494000	39.0	1000.0	9.000	Off	10.0	27.0	66.0
0.978000	36.7	1000.0	9.000	Off	10.0	23.3	60.0
1.470000	28.7	1000.0	9.000	Off	10.0	31.3	60.0
1.958000	29.4	1000.0	9.000	Off	10.0	30.6	60.0
2.446000	23.4	1000.0	9.000	Off	10.0	36.6	60.0

For adaptor: adapter 2_ FY2401500S2, BLE mode

Line Under Test: Line Positive (DC Output, charging mode, 230V~/50Hz)

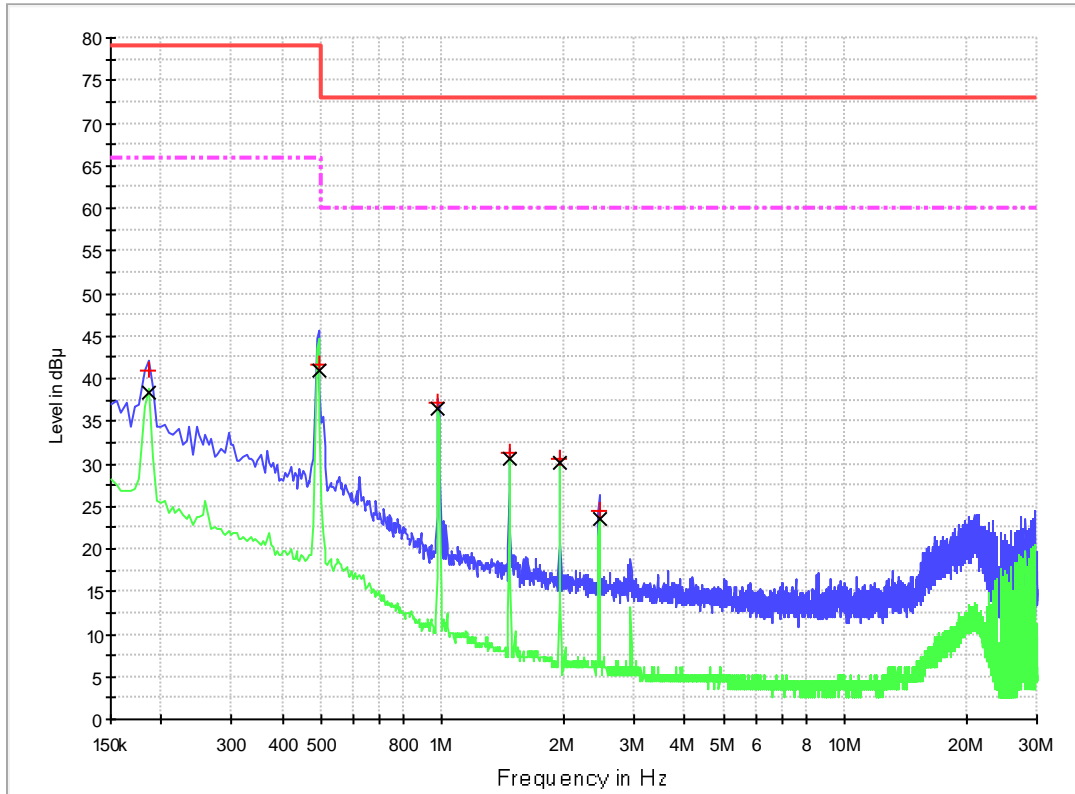

Graphical Results - Line L

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.186000	40.9	1000.0	9.000	Off	10.0	38.1	79.0
0.494000	41.6	1000.0	9.000	Off	10.0	37.4	79.0
0.978000	37.2	1000.0	9.000	Off	10.0	35.8	73.0
1.470000	31.3	1000.0	9.000	Off	10.0	41.7	73.0
1.958000	30.6	1000.0	9.000	Off	10.0	42.4	73.0
2.450000	24.5	1000.0	9.000	Off	10.0	48.5	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.186000	38.3	1000.0	9.000	Off	10.0	27.7	66.0
0.494000	40.9	1000.0	9.000	Off	10.0	25.1	66.0
0.978000	36.4	1000.0	9.000	Off	10.0	23.6	60.0
1.470000	30.6	1000.0	9.000	Off	10.0	29.4	60.0
1.958000	30.1	1000.0	9.000	Off	10.0	29.9	60.0
2.450000	23.6	1000.0	9.000	Off	10.0	36.4	60.0

For adaptor: adapter 2_ FY2401500S2

Line Under Test: Line Negative (DC Output, charging mode, 230V~/50Hz)

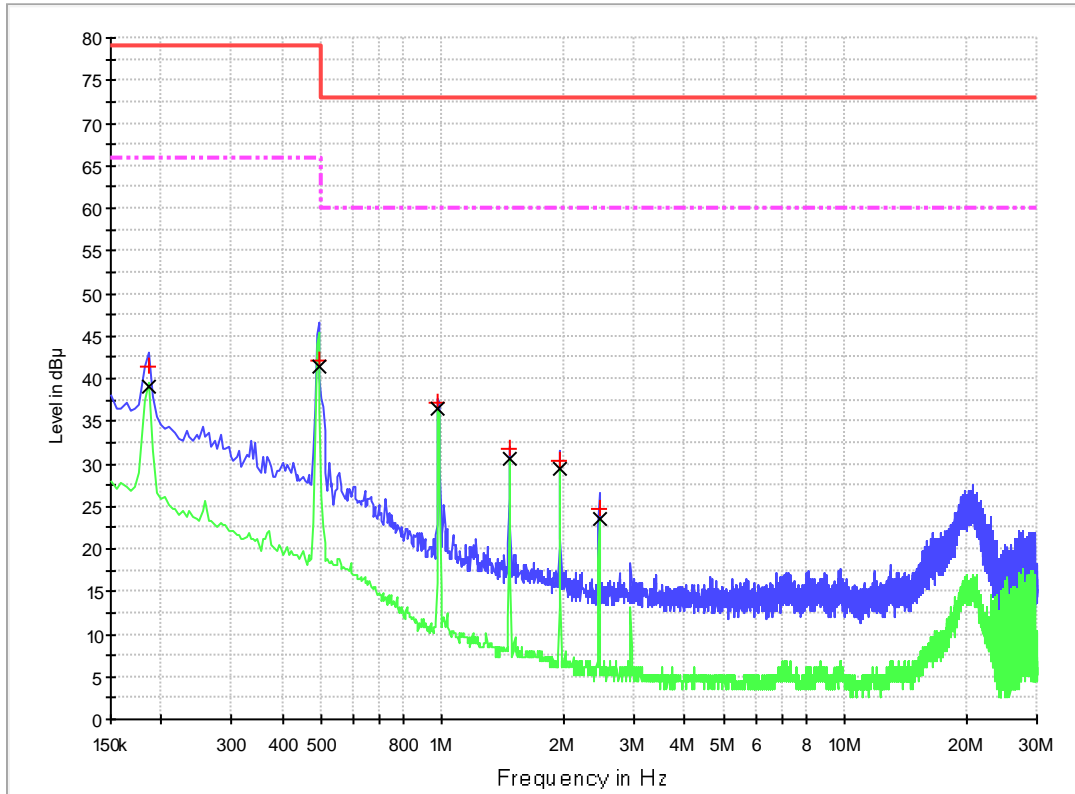

Graphical Results - Line N

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.186000	41.3	1000.0	9.000	Off	10.0	37.7	79.0
0.494000	42.2	1000.0	9.000	Off	10.0	36.8	79.0
0.978000	37.1	1000.0	9.000	Off	10.0	35.9	73.0
1.470000	31.7	1000.0	9.000	Off	10.0	41.3	73.0
1.958000	30.3	1000.0	9.000	Off	10.0	42.7	73.0
2.450000	24.8	1000.0	9.000	Off	10.0	48.2	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.186000	39.0	1000.0	9.000	Off	10.0	27.0	66.0
0.494000	41.5	1000.0	9.000	Off	10.0	24.5	66.0
0.978000	36.5	1000.0	9.000	Off	10.0	23.5	60.0
1.470000	30.7	1000.0	9.000	Off	10.0	29.3	60.0
1.958000	29.4	1000.0	9.000	Off	10.0	30.6	60.0
2.450000	23.4	1000.0	9.000	Off	10.0	36.6	60.0

For adaptor: adapter 2_ FY2401500S2, BLE mode

Line Under Test: Line Positive (DC Output, running mode, 110V~/60Hz)

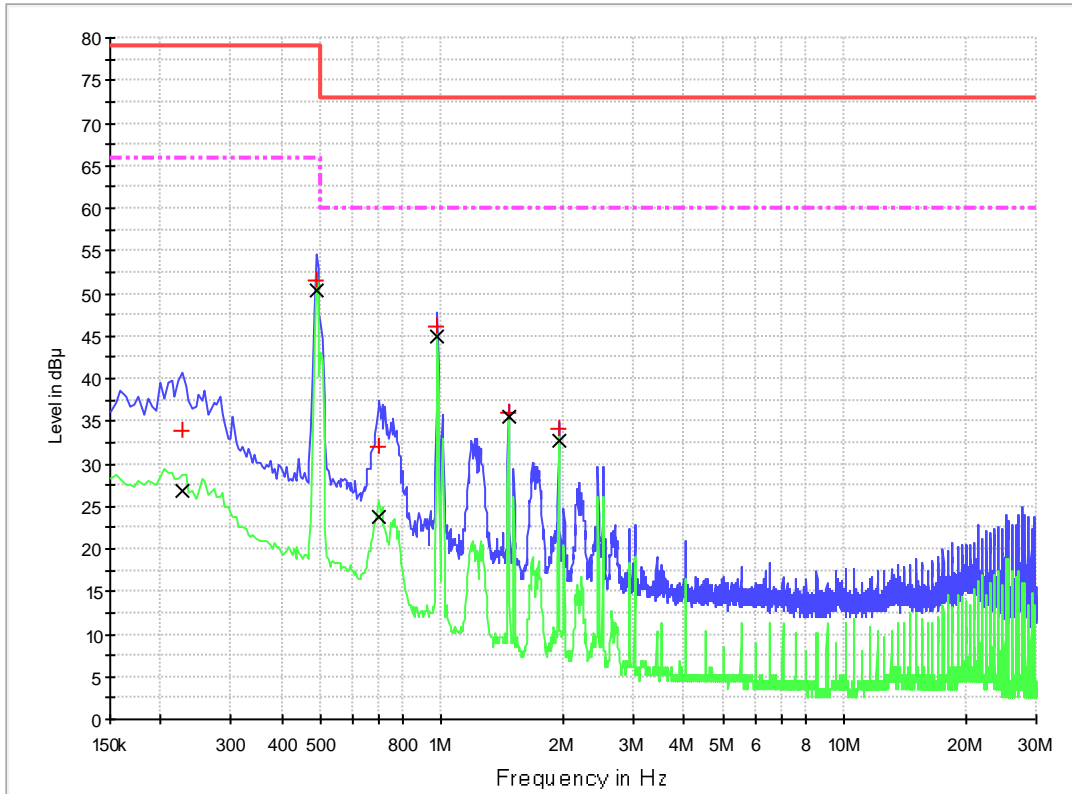

Graphical Results - Line L

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.226000	33.9	1000.0	9.000	Off	10.0	45.1	79.0
0.486000	51.6	1000.0	9.000	Off	10.0	27.4	79.0
0.698000	32.0	1000.0	9.000	Off	10.0	41.0	73.0
0.978000	46.1	1000.0	9.000	Off	10.0	26.9	73.0
1.466000	36.0	1000.0	9.000	Off	10.0	37.0	73.0
1.954000	34.0	1000.0	9.000	Off	10.0	39.0	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.226000	26.8	1000.0	9.000	Off	10.0	39.2	66.0
0.486000	50.3	1000.0	9.000	Off	10.0	15.7	66.0
0.698000	23.9	1000.0	9.000	Off	10.0	36.1	60.0
0.978000	44.9	1000.0	9.000	Off	10.0	15.1	60.0
1.466000	35.5	1000.0	9.000	Off	10.0	24.5	60.0
1.954000	32.6	1000.0	9.000	Off	10.0	27.4	60.0

For adaptor: adapter 2_ FY2401500S2, BLE mode

Line Under Test: Line Negative (DC Output, running mode, 110V~/60Hz)

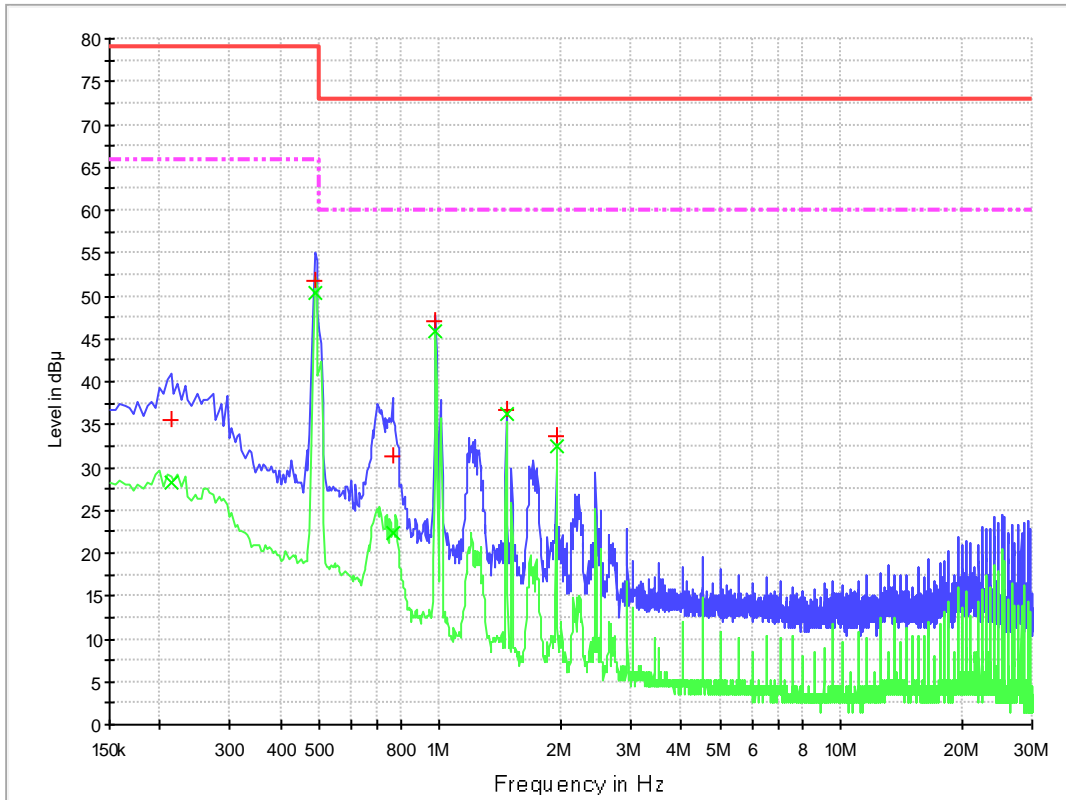

Graphical Results - Line N

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.214000	35.4	1000.0	9.000	Off	10.0	43.6	79.0
0.486000	51.8	1000.0	9.000	Off	10.0	27.2	79.0
0.762000	31.2	1000.0	9.000	Off	10.0	41.8	73.0
0.978000	47.1	1000.0	9.000	Off	10.0	25.9	73.0
1.466000	36.7	1000.0	9.000	Off	10.0	36.3	73.0
1.954000	33.6	1000.0	9.000	Off	10.0	39.4	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.214000	28.2	1000.0	9.000	Off	10.0	37.8	66.0
0.486000	50.4	1000.0	9.000	Off	10.0	15.6	66.0
0.762000	22.3	1000.0	9.000	Off	10.0	37.7	60.0
0.978000	45.9	1000.0	9.000	Off	10.0	14.1	60.0
1.466000	36.3	1000.0	9.000	Off	10.0	23.7	60.0
1.954000	32.5	1000.0	9.000	Off	10.0	27.5	60.0

For adaptor: adapter 2_ FY2401500S2, BLE mode

Line Under Test: Line Positive (DC Output, running mode, 230V~/50Hz)

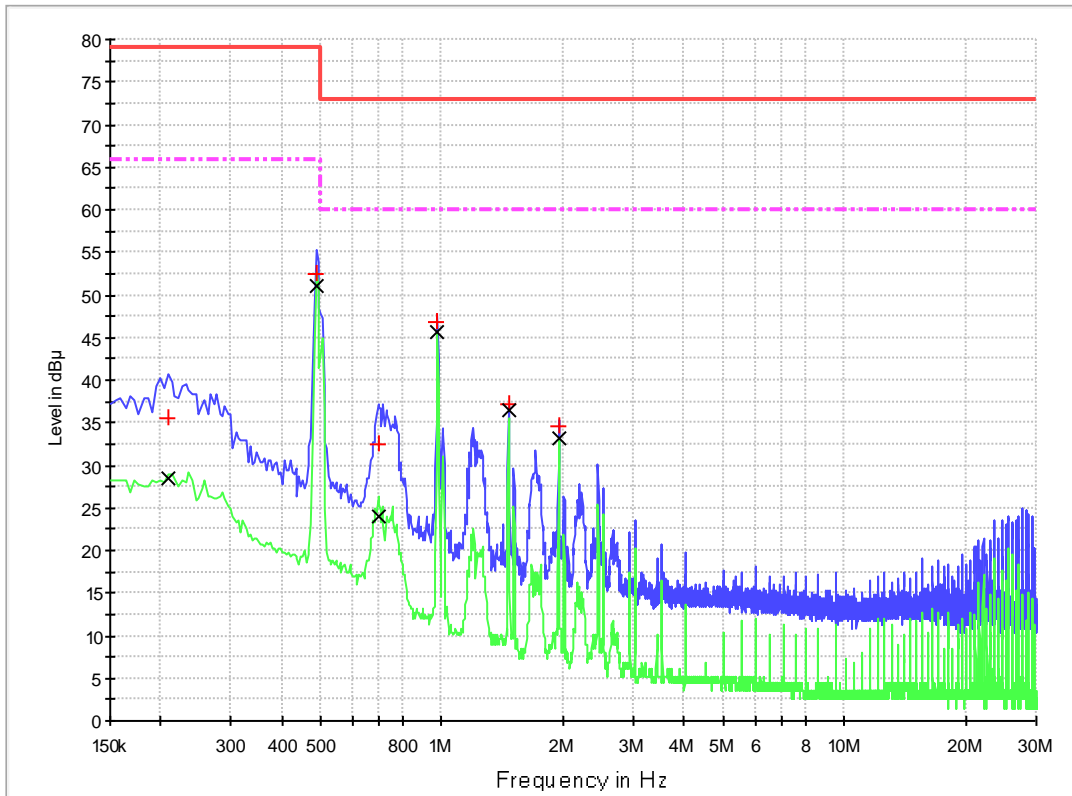

Graphical Results - Line L

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.210000	35.6	1000.0	9.000	Off	10.0	43.4	79.0
0.486000	52.4	1000.0	9.000	Off	10.0	26.6	79.0
0.694000	32.4	1000.0	9.000	Off	10.0	40.6	73.0
0.978000	46.9	1000.0	9.000	Off	10.0	26.1	73.0
1.466000	37.3	1000.0	9.000	Off	10.0	35.7	73.0
1.954000	34.6	1000.0	9.000	Off	10.0	38.4	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.210000	28.4	1000.0	9.000	Off	10.0	37.6	66.0
0.486000	51.0	1000.0	9.000	Off	10.0	15.0	66.0
0.694000	24.1	1000.0	9.000	Off	10.0	35.9	60.0
0.978000	45.7	1000.0	9.000	Off	10.0	14.3	60.0
1.466000	36.4	1000.0	9.000	Off	10.0	23.6	60.0
1.954000	33.2	1000.0	9.000	Off	10.0	26.8	60.0

For adaptor: adapter 2_ FY2401500S2, BLE mode

Line Under Test: Line Negative (DC Output, running mode, 230V~/50Hz)

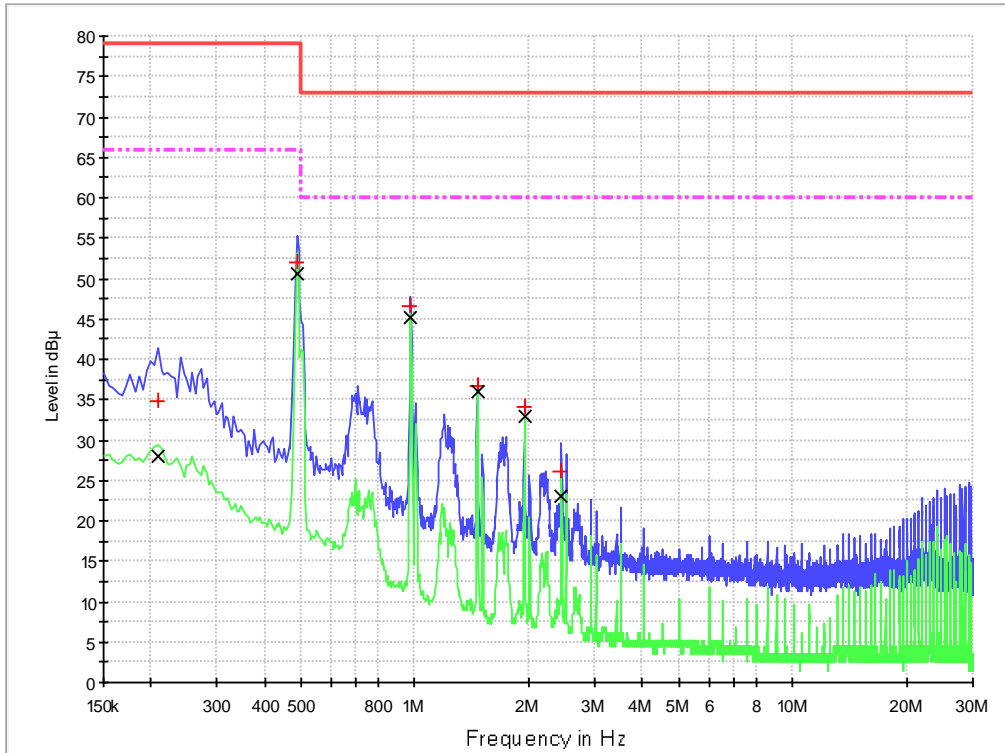

Graphical Results - Line N


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.210000	34.9	1000.0	9.000	Off	10.0	44.1	79.0
0.486000	52.0	1000.0	9.000	Off	10.0	27.0	79.0
0.978000	46.5	1000.0	9.000	Off	10.0	26.5	73.0
1.466000	36.8	1000.0	9.000	Off	10.0	36.2	73.0
1.954000	34.1	1000.0	9.000	Off	10.0	38.9	73.0
2.446000	26.1	1000.0	9.000	Off	10.0	46.9	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.210000	28.0	1000.0	9.000	Off	10.0	38.0	66.0
0.486000	50.7	1000.0	9.000	Off	10.0	15.3	66.0
0.978000	45.2	1000.0	9.000	Off	10.0	14.8	60.0
1.466000	36.0	1000.0	9.000	Off	10.0	24.0	60.0
1.954000	33.0	1000.0	9.000	Off	10.0	27.0	60.0
2.446000	23.0	1000.0	9.000	Off	10.0	37.0	60.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Line Under Test: Line L (110V~/60Hz, Charging mode)

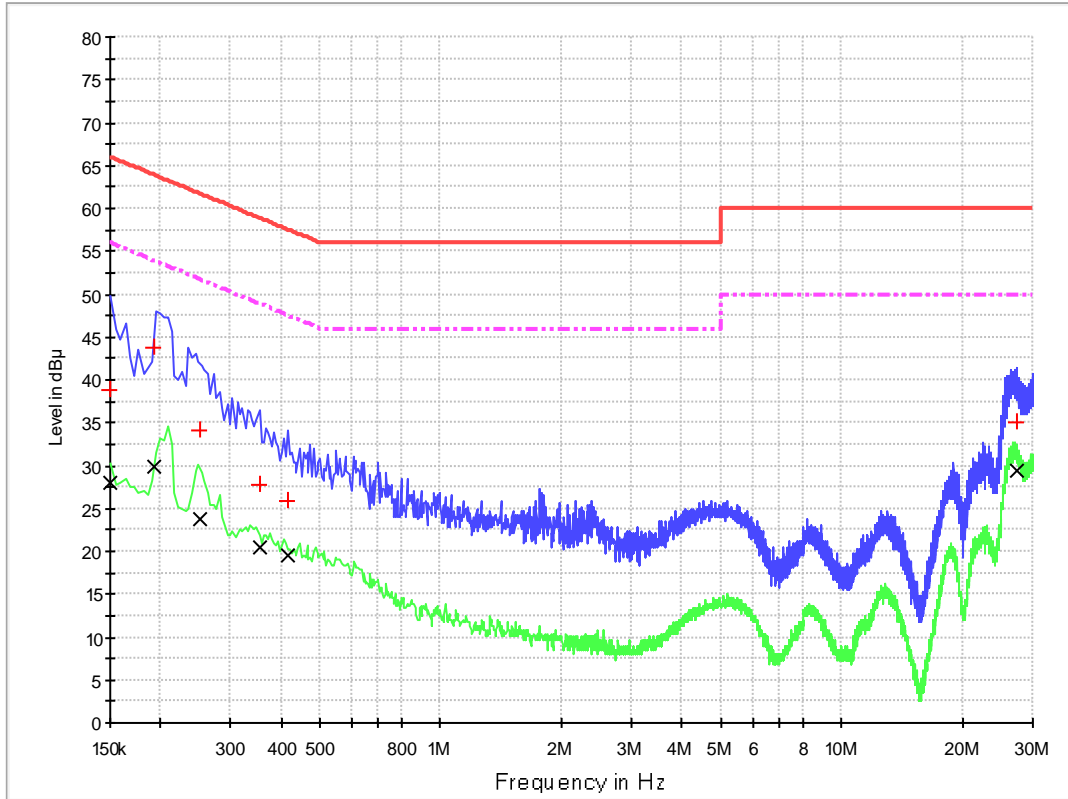

Graphical Results - Line L


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	38.8	1000.0	9.000	Off	L1	10.0	27.2	66.0
0.194000	43.8	1000.0	9.000	Off	L1	10.0	20.1	63.9
0.250000	34.1	1000.0	9.000	Off	L1	10.0	27.7	61.8
0.354000	27.8	1000.0	9.000	Off	L1	10.0	31.1	58.9
0.414000	25.9	1000.0	9.000	Off	L1	10.0	31.6	57.6
27.246000	35.2	1000.0	9.000	Off	L1	10.0	24.8	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	27.9	1000.0	9.000	Off	L1	10.0	28.1	56.0
0.194000	29.9	1000.0	9.000	Off	L1	10.0	24.0	53.9
0.250000	23.8	1000.0	9.000	Off	L1	10.0	27.9	51.8
0.354000	20.6	1000.0	9.000	Off	L1	10.0	28.3	48.9
0.414000	19.6	1000.0	9.000	Off	L1	10.0	27.9	47.6
27.246000	29.5	1000.0	9.000	Off	L1	10.0	20.5	50.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Line Under Test: Line N (110V~/60Hz, Charging mode)

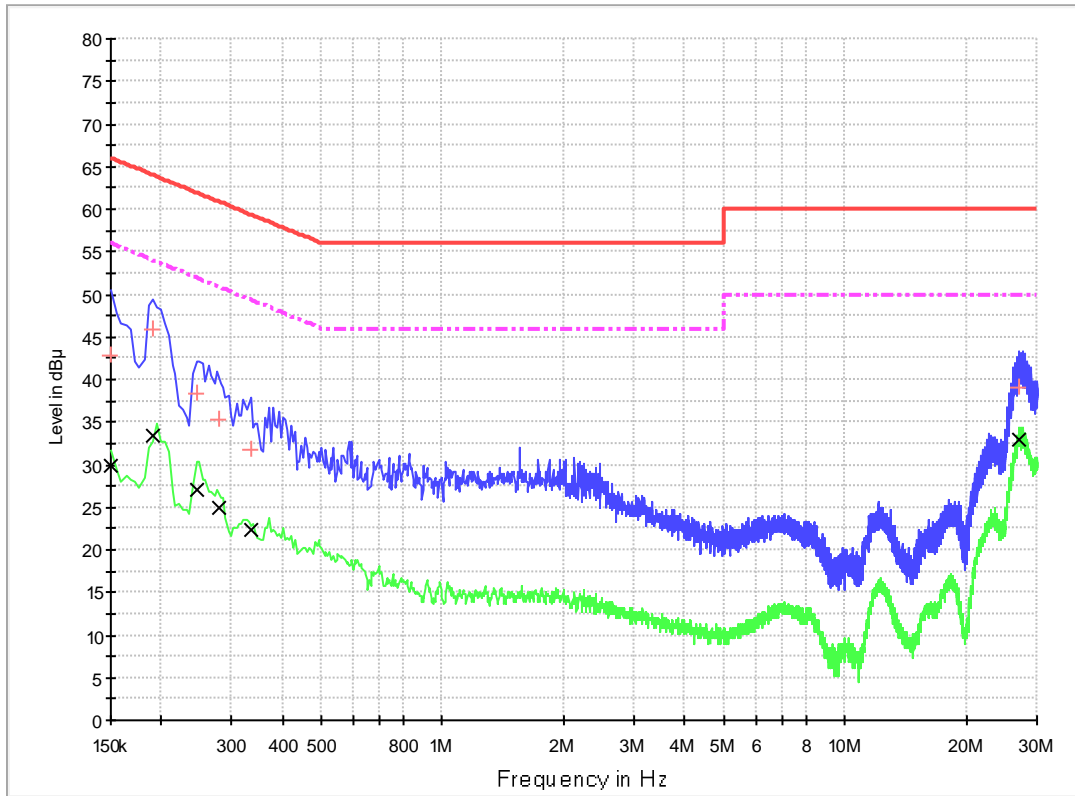

Graphical Results - Line N


QP

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)
0.150000	42.9	1000.0	9.000	Off	N	10.0	23.1	66.0
0.190000	46.0	1000.0	9.000	Off	N	10.0	18.1	64.0
0.246000	38.3	1000.0	9.000	Off	N	10.0	23.6	61.9
0.278000	35.4	1000.0	9.000	Off	N	10.0	25.5	60.9
0.334000	31.7	1000.0	9.000	Off	N	10.0	27.6	59.4
26.922000	39.0	1000.0	9.000	Off	N	10.0	21.0	60.0

AV

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dB μ V)
0.150000	29.9	1000.0	9.000	Off	N	10.0	26.1	56.0
0.190000	33.4	1000.0	9.000	Off	N	10.0	20.6	54.0
0.246000	27.1	1000.0	9.000	Off	N	10.0	24.8	51.9
0.278000	24.9	1000.0	9.000	Off	N	10.0	26.0	50.9
0.334000	22.3	1000.0	9.000	Off	N	10.0	27.1	49.4
26.922000	32.9	1000.0	9.000	Off	N	10.0	17.1	50.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Line Under Test: Line L (charging mode, 230V~/50Hz)

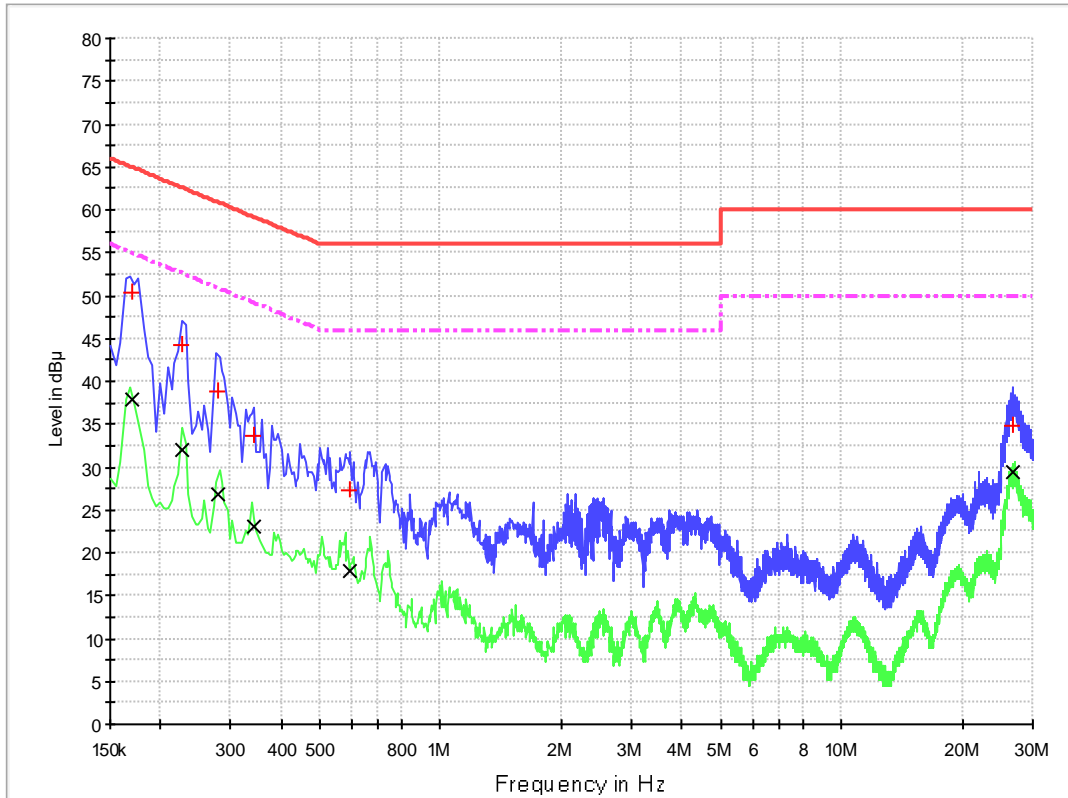

Graphical Results - Line L


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.170000	50.4	1000.0	9.000	Off	L1	10.0	14.6	65.0
0.226000	44.3	1000.0	9.000	Off	L1	10.0	18.3	62.6
0.278000	38.8	1000.0	9.000	Off	L1	10.0	22.1	60.9
0.342000	33.7	1000.0	9.000	Off	L1	10.0	25.5	59.2
0.594000	27.4	1000.0	9.000	Off	L1	10.0	28.6	56.0
26.798000	34.9	1000.0	9.000	Off	L1	10.0	25.1	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.170000	38.0	1000.0	9.000	Off	L1	10.0	17.0	55.0
0.226000	32.0	1000.0	9.000	Off	L1	10.0	20.6	52.6
0.278000	26.8	1000.0	9.000	Off	L1	10.0	24.0	50.9
0.342000	23.0	1000.0	9.000	Off	L1	10.0	26.2	49.2
0.594000	17.9	1000.0	9.000	Off	L1	10.0	28.1	46.0
26.798000	29.3	1000.0	9.000	Off	L1	10.0	20.7	50.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Line Under Test: Line N (charging mode, 230V~/50Hz)

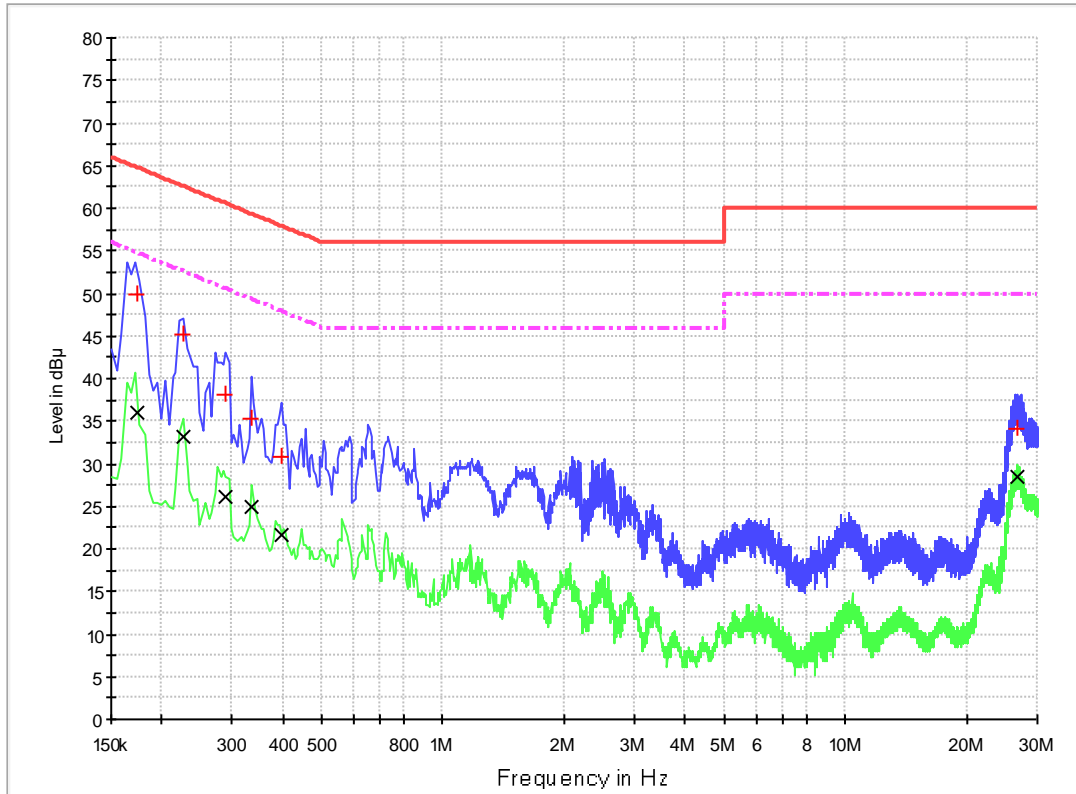

Graphical Results - Line N


QP

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)
0.174000	50.0	1000.0	9.000	Off	N	10.0	14.8	64.8
0.226000	45.3	1000.0	9.000	Off	N	10.0	17.3	62.6
0.290000	38.1	1000.0	9.000	Off	N	10.0	22.5	60.5
0.334000	35.4	1000.0	9.000	Off	N	10.0	24.0	59.4
0.398000	30.8	1000.0	9.000	Off	N	10.0	27.1	57.9
26.670000	34.1	1000.0	9.000	Off	N	10.0	25.9	60.0

AV

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dB μ V)
0.174000	36.1	1000.0	9.000	Off	N	10.0	18.7	54.8
0.226000	33.1	1000.0	9.000	Off	N	10.0	19.5	52.6
0.290000	26.1	1000.0	9.000	Off	N	10.0	24.4	50.5
0.334000	24.8	1000.0	9.000	Off	N	10.0	24.5	49.4
0.398000	21.5	1000.0	9.000	Off	N	10.0	26.3	47.9
26.670000	28.4	1000.0	9.000	Off	N	10.0	21.6	50.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Line Under Test: Line L (running mode, 110V~/60Hz)

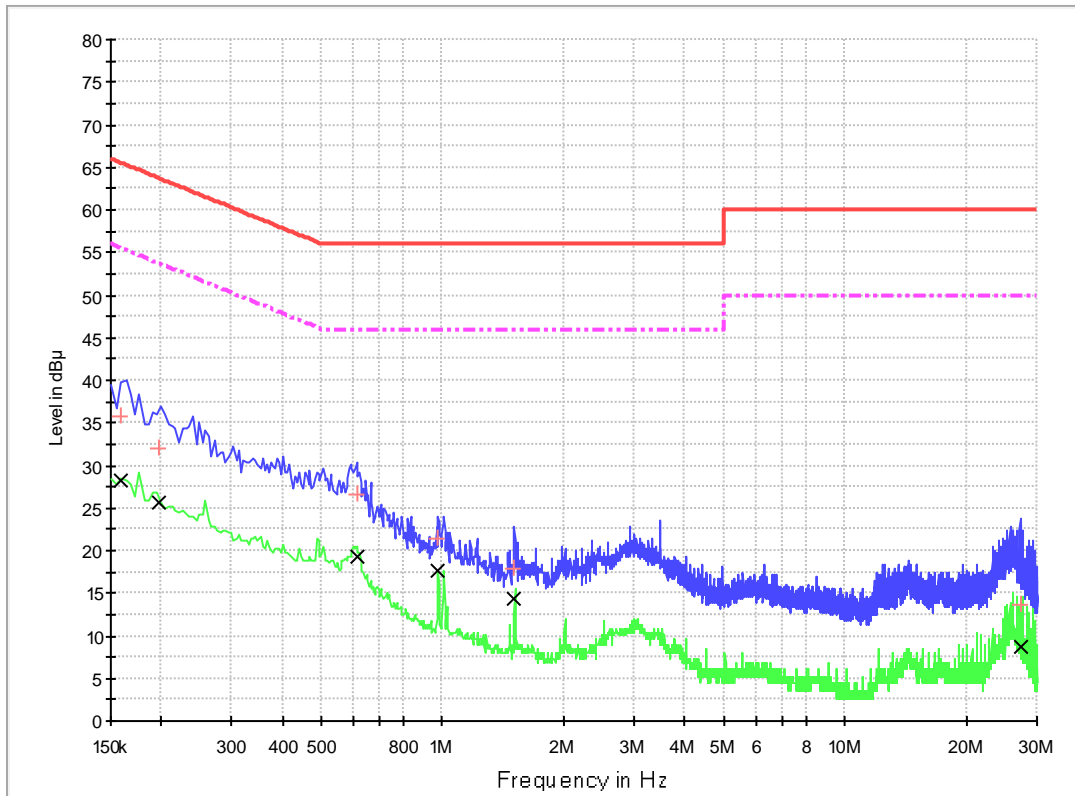

Graphical Results - Line L


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.158000	35.8	1000.0	9.000	Off	L1	10.0	29.8	65.6
0.198000	32.1	1000.0	9.000	Off	L1	10.0	31.6	63.7
0.614000	26.5	1000.0	9.000	Off	L1	10.0	29.5	56.0
0.978000	21.3	1000.0	9.000	Off	L1	10.0	34.7	56.0
1.510000	17.9	1000.0	9.000	Off	L1	10.0	38.1	56.0
27.218000	13.7	1000.0	9.000	Off	L1	10.0	46.3	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.158000	28.1	1000.0	9.000	Off	L1	10.0	19.8	55.6
0.198000	25.8	1000.0	9.000	Off	L1	10.0	21.6	53.7
0.614000	19.3	1000.0	9.000	Off	L1	10.0	19.5	46.0
0.978000	17.6	1000.0	9.000	Off	L1	10.0	24.7	46.0
1.510000	14.3	1000.0	9.000	Off	L1	10.0	28.1	46.0
27.218000	8.8	1000.0	9.000	Off	L1	10.0	36.3	50.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Line Under Test: Line N (running mode, 110V~/60Hz)

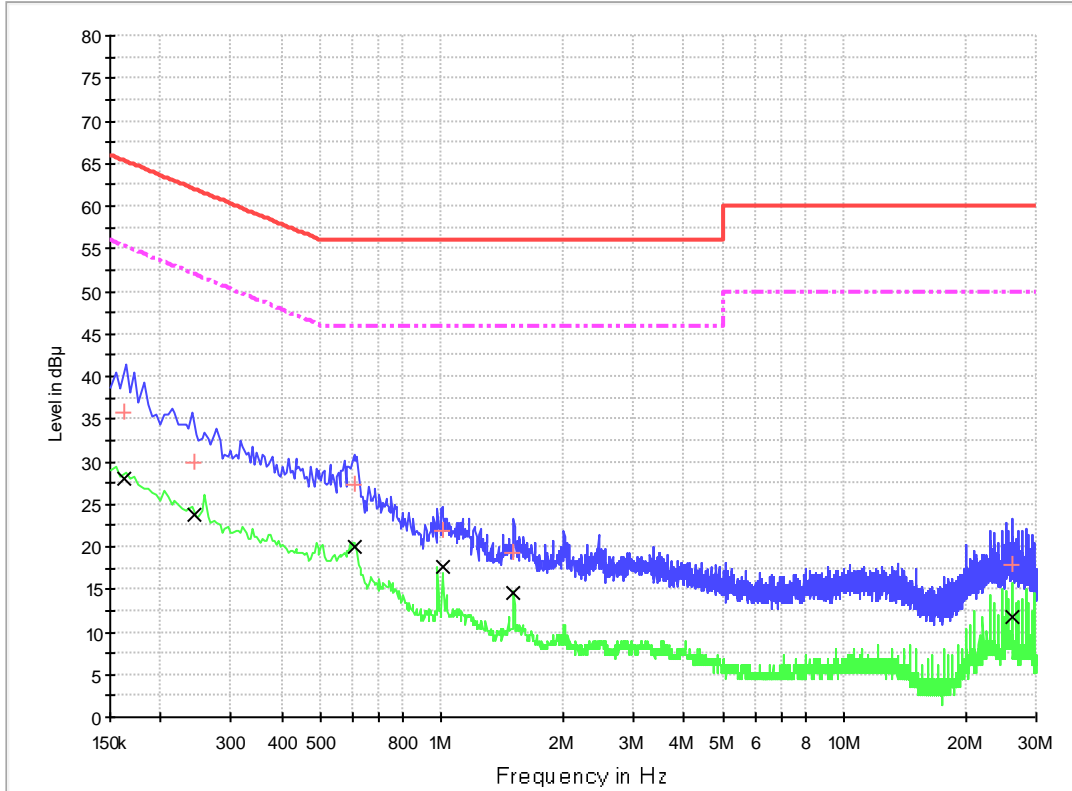

Graphical Results - Line N


QP

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)
0.162000	35.8	1000.0	9.000	Off	N	10.0	29.6	65.4
0.242000	29.9	1000.0	9.000	Off	N	10.0	32.2	62.0
0.606000	27.2	1000.0	9.000	Off	N	10.0	28.8	56.0
1.006000	21.9	1000.0	9.000	Off	N	10.0	34.1	56.0
1.510000	19.4	1000.0	9.000	Off	N	10.0	36.6	56.0
26.170000	17.9	1000.0	9.000	Off	N	10.0	42.1	60.0

AV

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dB μ V)
0.162000	28.0	1000.0	9.000	Off	N	10.0	27.3	55.4
0.242000	23.8	1000.0	9.000	Off	N	10.0	28.3	52.0
0.606000	20.1	1000.0	9.000	Off	N	10.0	25.9	46.0
1.006000	17.7	1000.0	9.000	Off	N	10.0	28.3	46.0
1.510000	14.6	1000.0	9.000	Off	N	10.0	31.4	46.0
26.170000	11.9	1000.0	9.000	Off	N	10.0	38.1	50.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Line Under Test: Line L (running mode, 230V~/50Hz)

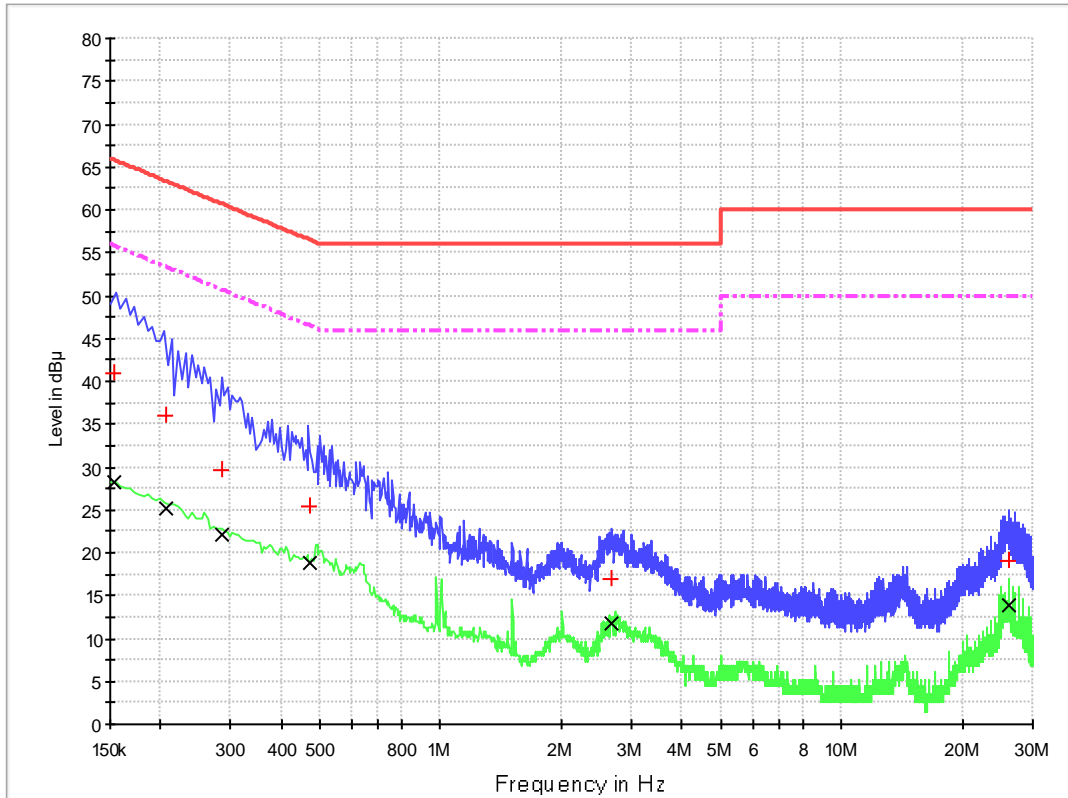

Graphical Results - Line L


QP

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)
0.154000	40.9	1000.0	9.000	Off	L1	10.0	24.9	65.8
0.206000	35.9	1000.0	9.000	Off	L1	10.0	27.5	63.4
0.286000	29.6	1000.0	9.000	Off	L1	10.0	31.0	60.6
0.470000	25.3	1000.0	9.000	Off	L1	10.0	31.2	56.5
2.682000	16.9	1000.0	9.000	Off	L1	10.0	39.1	56.0
26.162000	19.1	1000.0	9.000	Off	L1	10.0	40.9	60.0

AV

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dB μ V)
0.154000	28.1	1000.0	9.000	Off	L1	10.0	27.7	55.8
0.206000	25.2	1000.0	9.000	Off	L1	10.0	28.2	53.4
0.286000	22.1	1000.0	9.000	Off	L1	10.0	28.5	50.6
0.470000	18.9	1000.0	9.000	Off	L1	10.0	27.6	46.5
2.682000	11.7	1000.0	9.000	Off	L1	10.0	34.3	46.0
26.162000	13.8	1000.0	9.000	Off	L1	10.0	36.2	50.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Line Under Test: Line N (running mode, 230V~/50Hz)

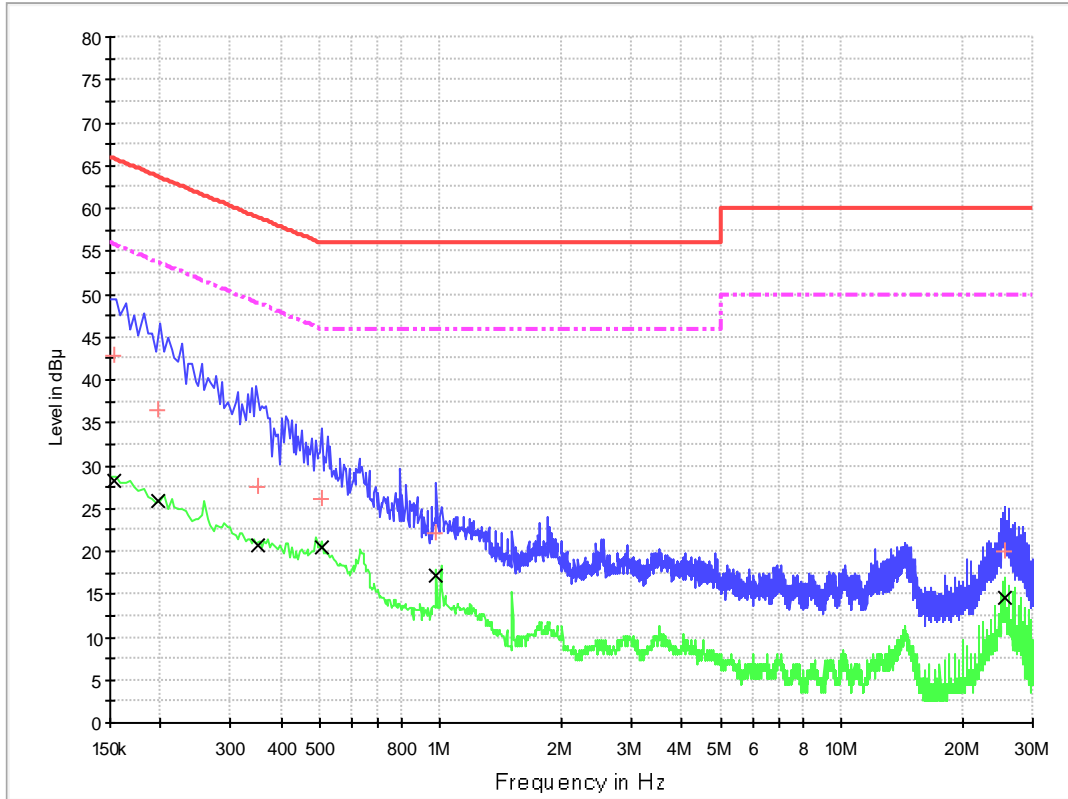

Graphical Results - Line N

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.154000	42.9	1000.0	9.000	Off	N	10.0	22.9	65.8
0.198000	36.5	1000.0	9.000	Off	N	10.0	27.2	63.7
0.350000	27.5	1000.0	9.000	Off	N	10.0	31.5	59.0
0.506000	26.0	1000.0	9.000	Off	N	10.0	30.0	56.0
0.978000	22.1	1000.0	9.000	Off	N	10.0	33.9	56.0
25.642000	20.0	1000.0	9.000	Off	N	10.0	40.0	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.154000	28.3	1000.0	9.000	Off	N	10.0	27.5	55.8
0.198000	25.8	1000.0	9.000	Off	N	10.0	27.9	53.7
0.350000	20.8	1000.0	9.000	Off	N	10.0	28.2	49.0
0.506000	20.4	1000.0	9.000	Off	N	10.0	25.6	46.0
0.978000	17.2	1000.0	9.000	Off	N	10.0	28.8	46.0
25.642000	14.6	1000.0	9.000	Off	N	10.0	35.4	50.0

For adaptor: adapter 3_FY2401500S3, BLE mode

Line Under Test: Line L (DC Input, charging mode, 110V~/60Hz)

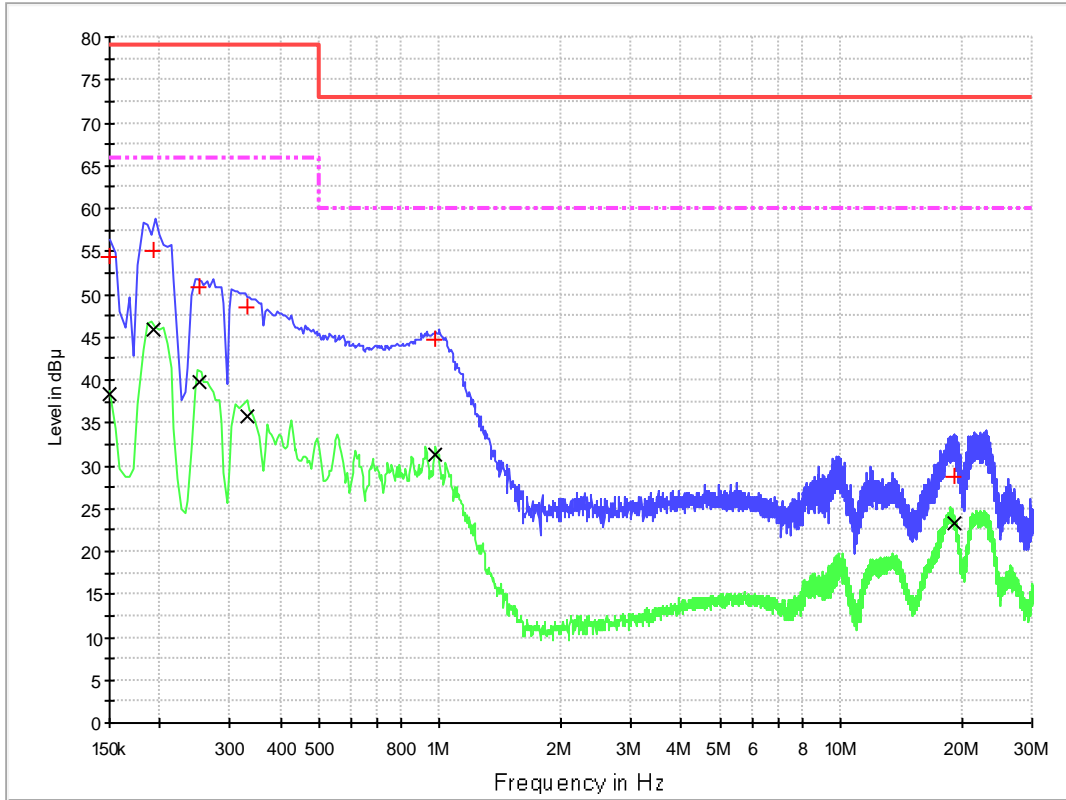

Graphical Results - Line L


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	54.4	1000.0	9.000	Off	10.0	24.6	79.0
0.194000	55.1	1000.0	9.000	Off	10.0	23.9	79.0
0.250000	50.8	1000.0	9.000	Off	10.0	28.2	79.0
0.330000	48.4	1000.0	9.000	Off	10.0	30.6	79.0
0.978000	44.6	1000.0	9.000	Off	10.0	28.4	73.0
19.194000	28.8	1000.0	9.000	Off	10.0	44.2	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	38.4	1000.0	9.000	Off	10.0	27.6	66.0
0.194000	45.8	1000.0	9.000	Off	10.0	20.2	66.0
0.250000	39.9	1000.0	9.000	Off	10.0	26.1	66.0
0.330000	35.7	1000.0	9.000	Off	10.0	30.3	66.0
0.978000	31.3	1000.0	9.000	Off	10.0	28.7	60.0
19.194000	23.2	1000.0	9.000	Off	10.0	36.8	60.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Line Under Test: Line N (DC Input, charging mode, 110V~/60Hz)

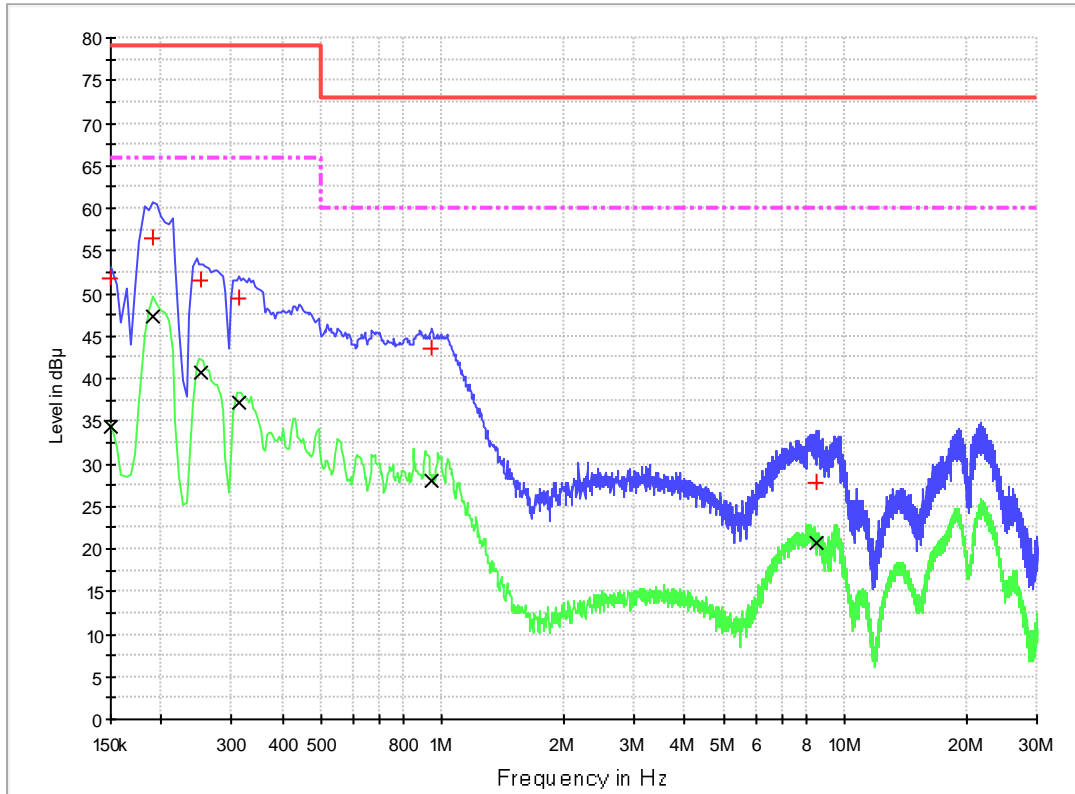

Graphical Results - Line N


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	51.8	1000.0	9.000	Off	10.0	27.2	79.0
0.190000	56.5	1000.0	9.000	Off	10.0	22.5	79.0
0.250000	51.5	1000.0	9.000	Off	10.0	27.5	79.0
0.314000	49.4	1000.0	9.000	Off	10.0	29.6	79.0
0.942000	43.6	1000.0	9.000	Off	10.0	29.4	73.0
8.462000	27.7	1000.0	9.000	Off	10.0	45.3	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	34.4	1000.0	9.000	Off	10.0	31.6	66.0
0.190000	47.3	1000.0	9.000	Off	10.0	18.7	66.0
0.250000	40.7	1000.0	9.000	Off	10.0	25.3	66.0
0.314000	37.2	1000.0	9.000	Off	10.0	28.8	66.0
0.942000	28.0	1000.0	9.000	Off	10.0	32.0	60.0
8.462000	20.7	1000.0	9.000	Off	10.0	39.3	60.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Line Under Test: Line L (DC Input, running mode, 110V~/60Hz)

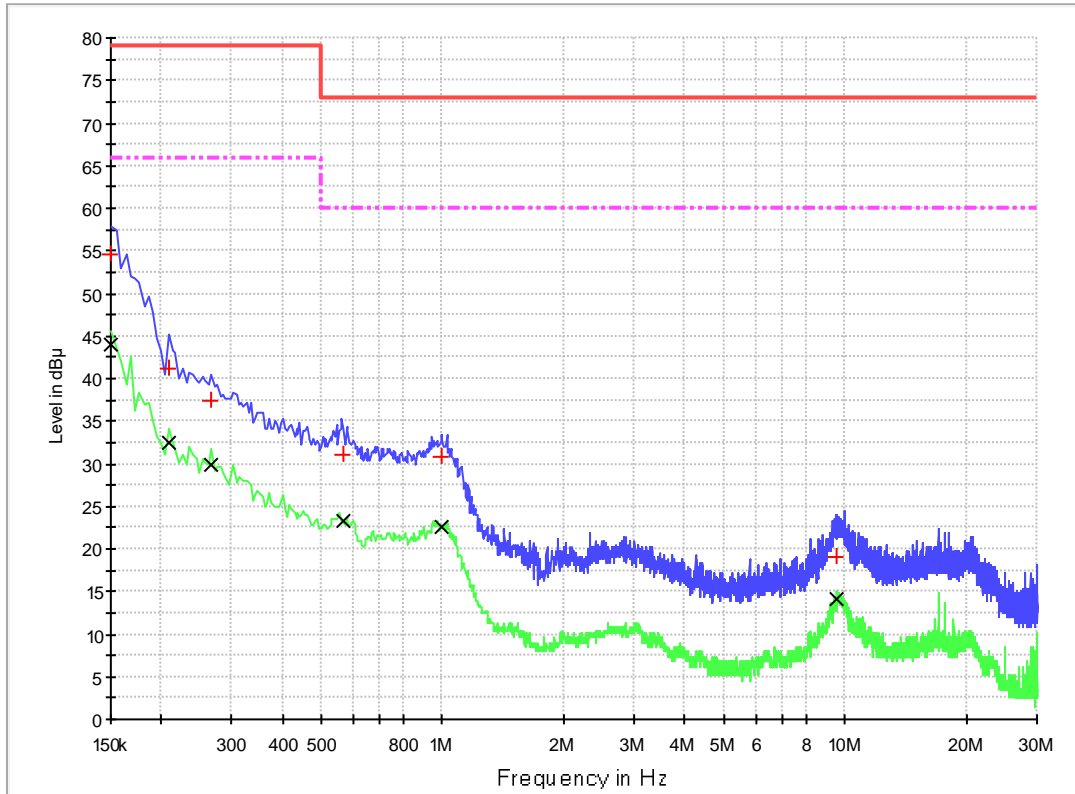

Graphical Results - Line L


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	54.7	1000.0	9.000	Off	10.0	24.3	79.0
0.210000	41.1	1000.0	9.000	Off	10.0	37.9	79.0
0.266000	37.4	1000.0	9.000	Off	10.0	41.6	79.0
0.566000	31.0	1000.0	9.000	Off	10.0	42.0	73.0
0.998000	30.9	1000.0	9.000	Off	10.0	42.1	73.0
9.578000	19.1	1000.0	9.000	Off	10.0	53.9	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	44.0	1000.0	9.000	Off	10.0	22.0	66.0
0.210000	32.5	1000.0	9.000	Off	10.0	33.5	66.0
0.266000	29.8	1000.0	9.000	Off	10.0	36.2	66.0
0.566000	23.3	1000.0	9.000	Off	10.0	36.7	60.0
0.998000	22.7	1000.0	9.000	Off	10.0	37.3	60.0
9.578000	14.2	1000.0	9.000	Off	10.0	45.8	60.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Line Under Test: Line N (DC Input, running mode, 110V~/60Hz)

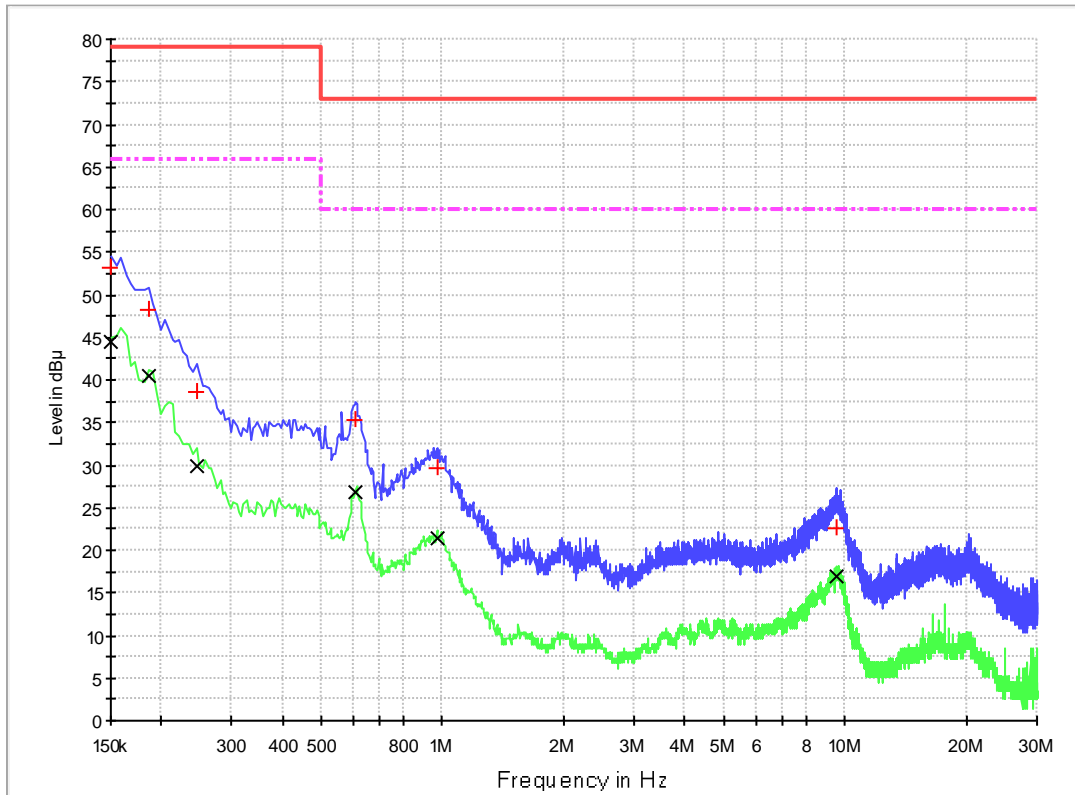

Graphical Results - Line N


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	53.2	1000.0	9.000	Off	10.0	25.8	79.0
0.186000	48.1	1000.0	9.000	Off	10.0	30.9	79.0
0.246000	38.6	1000.0	9.000	Off	10.0	40.4	79.0
0.610000	35.2	1000.0	9.000	Off	10.0	37.8	73.0
0.970000	29.6	1000.0	9.000	Off	10.0	43.4	73.0
9.502000	22.5	1000.0	9.000	Off	10.0	50.5	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	44.6	1000.0	9.000	Off	10.0	21.4	66.0
0.186000	40.5	1000.0	9.000	Off	10.0	25.5	66.0
0.246000	30.0	1000.0	9.000	Off	10.0	36.0	66.0
0.610000	26.9	1000.0	9.000	Off	10.0	33.1	60.0
0.970000	21.5	1000.0	9.000	Off	10.0	38.5	60.0
9.502000	17.0	1000.0	9.000	Off	10.0	43.0	60.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Line Under Test: Line L (DC Input, charging mode, 230V~/50Hz)

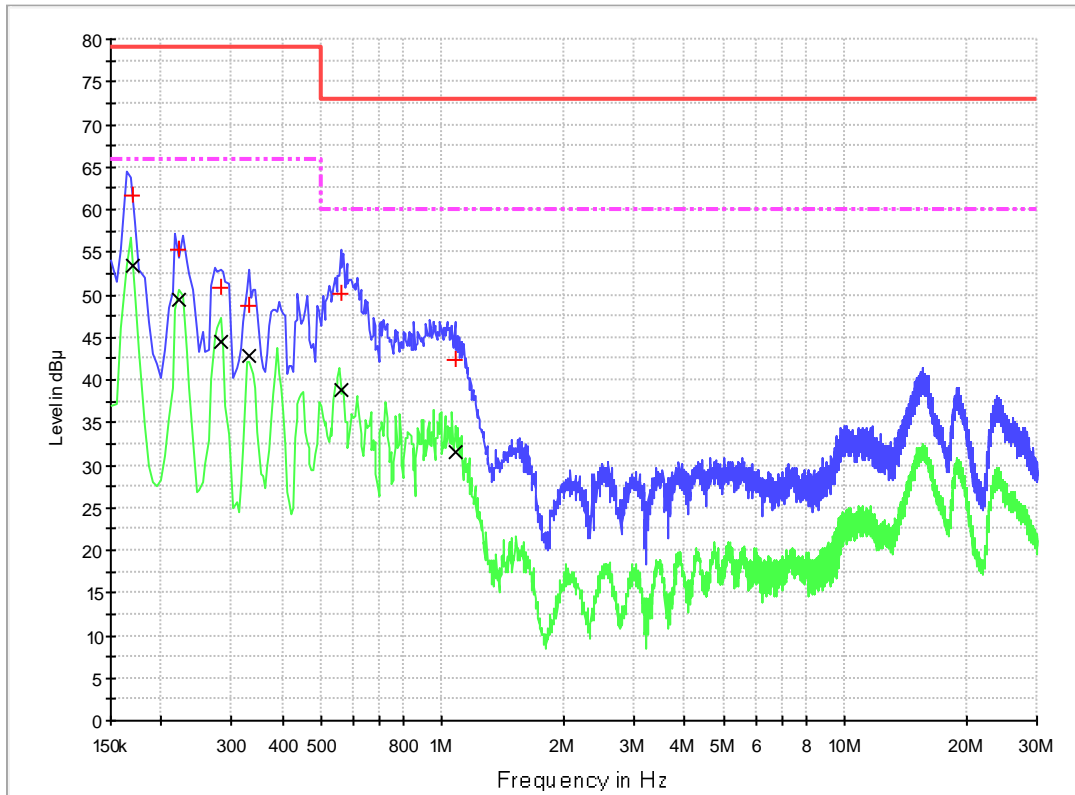

Graphical Results - Line L


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.170000	61.5	1000.0	9.000	Off	10.0	17.5	79.0
0.222000	55.4	1000.0	9.000	Off	10.0	23.6	79.0
0.282000	50.9	1000.0	9.000	Off	10.0	28.1	79.0
0.330000	48.7	1000.0	9.000	Off	10.0	30.3	79.0
0.558000	50.0	1000.0	9.000	Off	10.0	23.0	73.0
1.074000	42.5	1000.0	9.000	Off	10.0	30.5	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.170000	53.3	1000.0	9.000	Off	10.0	12.7	66.0
0.222000	49.5	1000.0	9.000	Off	10.0	16.5	66.0
0.282000	44.4	1000.0	9.000	Off	10.0	21.6	66.0
0.330000	42.8	1000.0	9.000	Off	10.0	23.2	66.0
0.558000	38.9	1000.0	9.000	Off	10.0	21.1	60.0
1.074000	31.5	1000.0	9.000	Off	10.0	28.5	60.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Line Under Test: Line N (DC Input, charging mode, 230V~/50Hz)

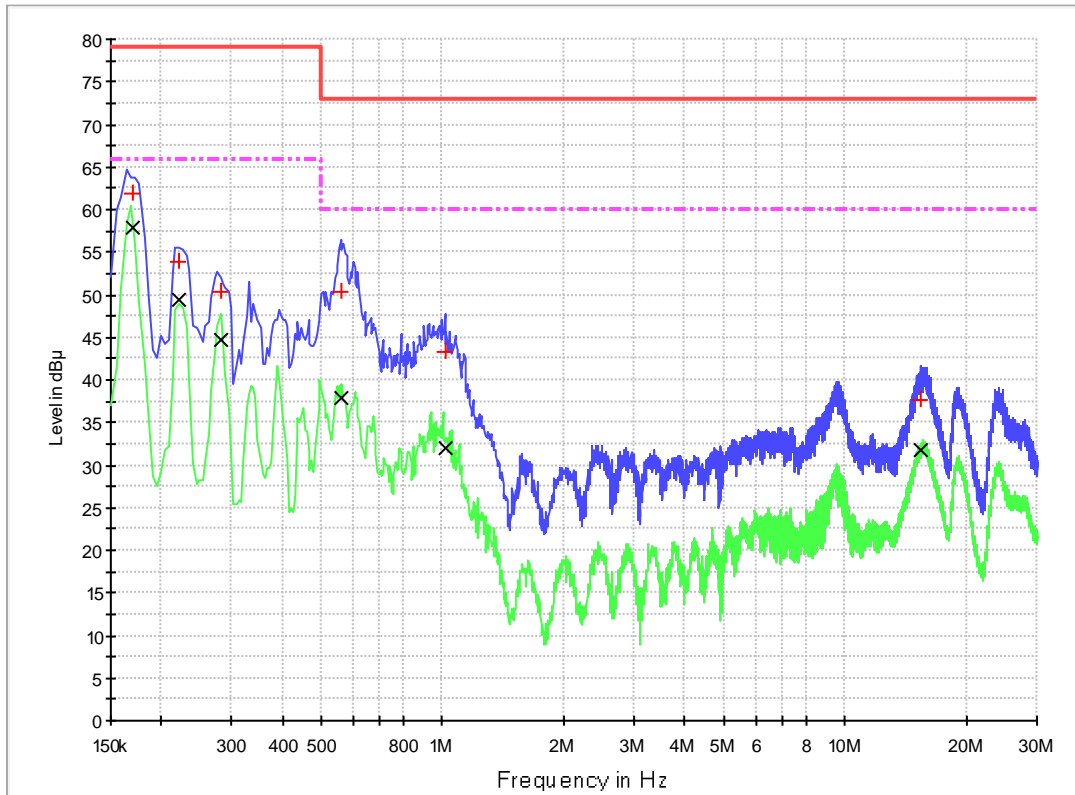

Graphical Results - Line N


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.170000	61.9	1000.0	9.000	Off	10.0	17.1	79.0
0.222000	53.8	1000.0	9.000	Off	10.0	25.2	79.0
0.282000	50.3	1000.0	9.000	Off	10.0	28.7	79.0
0.558000	50.4	1000.0	9.000	Off	10.0	22.6	73.0
1.014000	43.4	1000.0	9.000	Off	10.0	29.6	73.0
15.498000	37.7	1000.0	9.000	Off	10.0	35.3	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.170000	57.8	1000.0	9.000	Off	10.0	8.2	66.0
0.222000	49.4	1000.0	9.000	Off	10.0	16.6	66.0
0.282000	44.8	1000.0	9.000	Off	10.0	21.2	66.0
0.558000	37.9	1000.0	9.000	Off	10.0	22.1	60.0
1.014000	32.0	1000.0	9.000	Off	10.0	28.0	60.0
15.498000	31.8	1000.0	9.000	Off	10.0	28.2	60.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Line Under Test: Line L (DC Input, running mode, 230V~/50Hz)

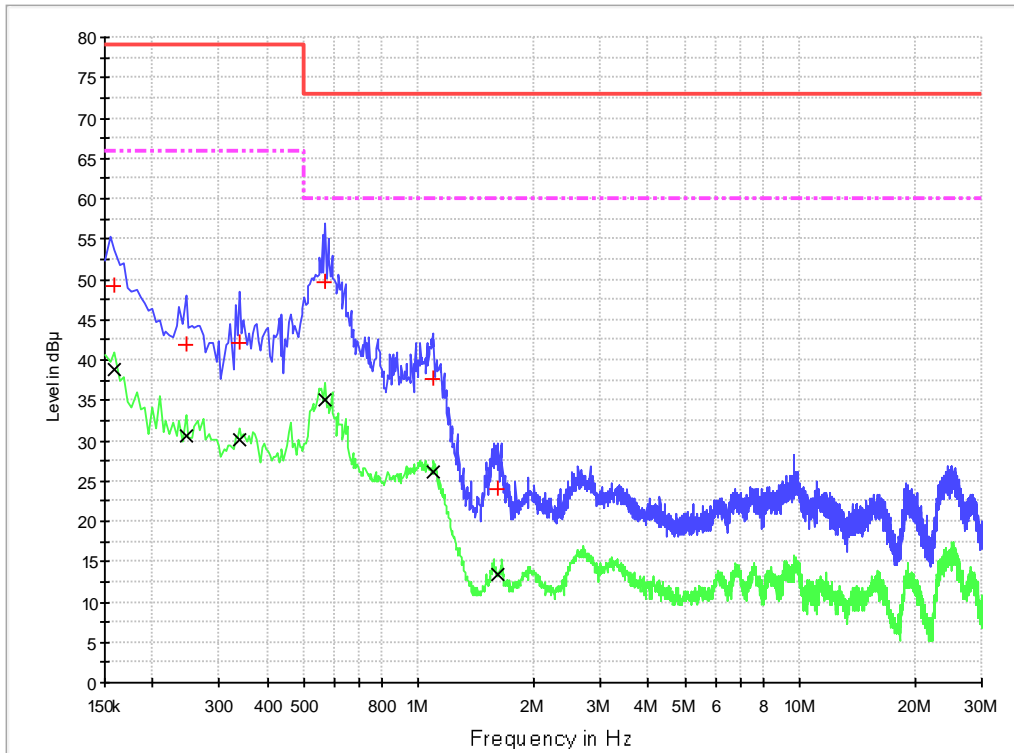

Graphical Results - Line L


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.158000	49.1	1000.0	9.000	Off	10.0	29.9	79.0
0.246000	42.0	1000.0	9.000	Off	10.0	37.0	79.0
0.338000	42.2	1000.0	9.000	Off	10.0	36.8	79.0
0.570000	49.8	1000.0	9.000	Off	10.0	23.2	73.0
1.086000	37.7	1000.0	9.000	Off	10.0	35.3	73.0
1.614000	24.0	1000.0	9.000	Off	10.0	49.0	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.158000	38.8	1000.0	9.000	Off	10.0	27.2	66.0
0.246000	30.6	1000.0	9.000	Off	10.0	35.4	66.0
0.338000	30.1	1000.0	9.000	Off	10.0	35.9	66.0
0.570000	35.1	1000.0	9.000	Off	10.0	24.9	60.0
1.086000	26.1	1000.0	9.000	Off	10.0	33.9	60.0
1.614000	13.4	1000.0	9.000	Off	10.0	46.6	60.0

For adaptor: adapter 3_FY2401500S3, BLE mode
 Line Under Test: Line N (DC Input, running mode, 230V~/50Hz)

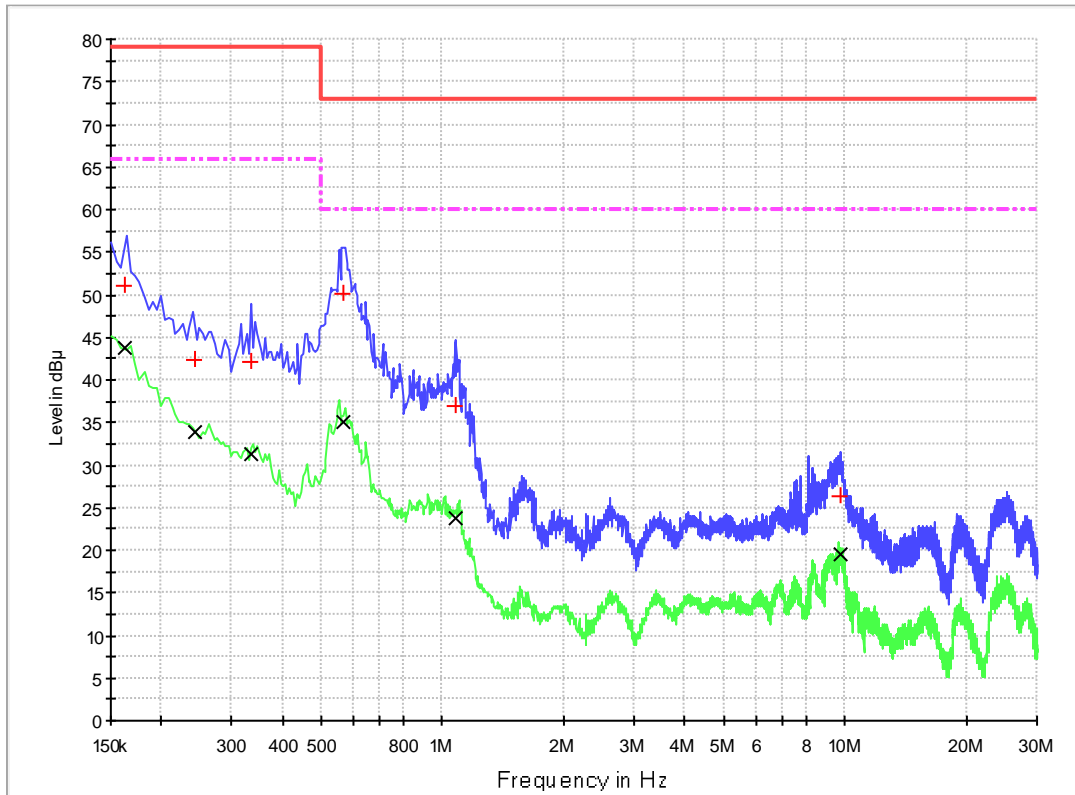

Graphical Results - Line N

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.162000	50.9	1000.0	9.000	Off	10.0	28.1	79.0
0.242000	42.5	1000.0	9.000	Off	10.0	36.5	79.0
0.334000	42.1	1000.0	9.000	Off	10.0	36.9	79.0
0.570000	50.1	1000.0	9.000	Off	10.0	22.9	73.0
1.074000	36.8	1000.0	9.000	Off	10.0	36.2	73.0
9.726000	26.3	1000.0	9.000	Off	10.0	46.7	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.162000	43.8	1000.0	9.000	Off	10.0	22.2	66.0
0.242000	33.8	1000.0	9.000	Off	10.0	32.2	66.0
0.334000	31.4	1000.0	9.000	Off	10.0	34.6	66.0
0.570000	35.2	1000.0	9.000	Off	10.0	24.8	60.0
1.074000	23.9	1000.0	9.000	Off	10.0	36.1	60.0
9.726000	19.6	1000.0	9.000	Off	10.0	40.4	60.0

For adaptor: adapter 3_FY2401500S3, BLE mode

Line Under Test: Line L (DC Output, charging mode, 110V~/60Hz)

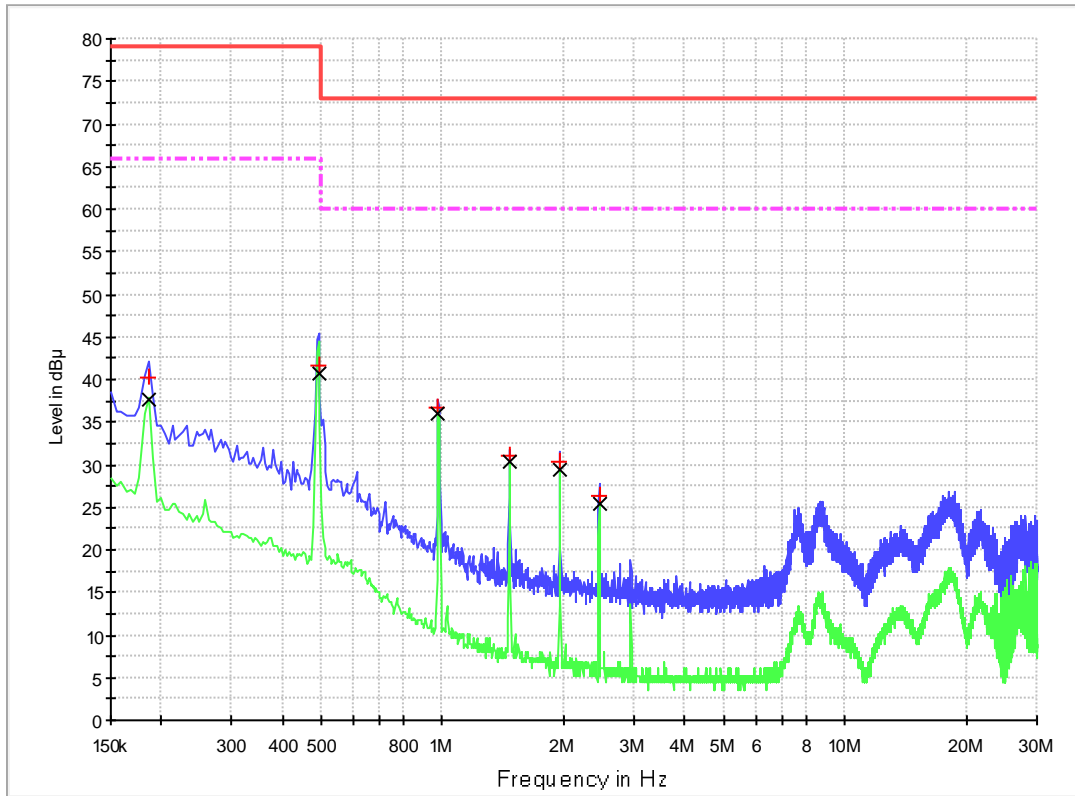

Graphical Results - Line L

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.186000	40.1	1000.0	9.000	Off	10.0	38.9	79.0
0.494000	41.6	1000.0	9.000	Off	10.0	37.4	79.0
0.978000	36.7	1000.0	9.000	Off	10.0	36.3	73.0
1.470000	31.1	1000.0	9.000	Off	10.0	41.9	73.0
1.958000	30.3	1000.0	9.000	Off	10.0	42.7	73.0
2.450000	26.4	1000.0	9.000	Off	10.0	46.6	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.186000	37.6	1000.0	9.000	Off	10.0	28.4	66.0
0.494000	40.7	1000.0	9.000	Off	10.0	25.3	66.0
0.978000	36.1	1000.0	9.000	Off	10.0	23.9	60.0
1.470000	30.4	1000.0	9.000	Off	10.0	29.6	60.0
1.958000	29.5	1000.0	9.000	Off	10.0	30.5	60.0
2.450000	25.5	1000.0	9.000	Off	10.0	34.5	60.0

For adaptor: adapter 3_FY2401500S3, BLE mode

Line Under Test: Line N (DC Output, charging mode, 110V~/60Hz)

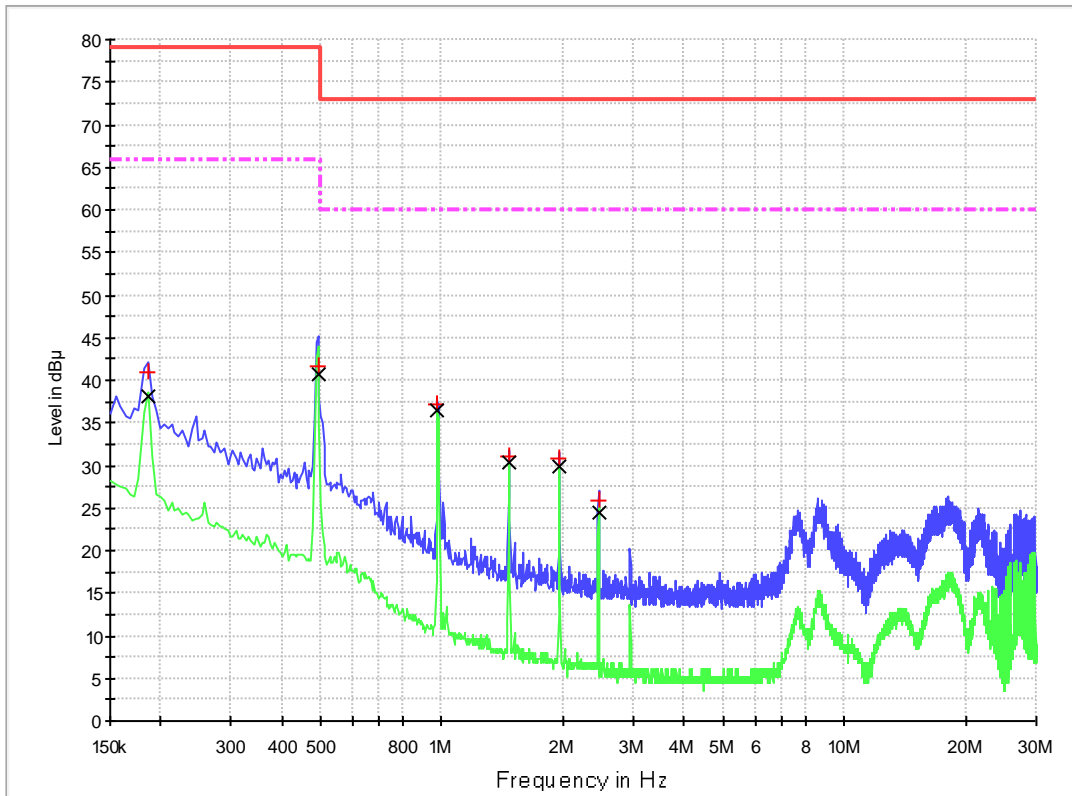

Graphical Results - Line N

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.186000	41.0	1000.0	9.000	Off	10.0	38.0	79.0
0.494000	41.7	1000.0	9.000	Off	10.0	37.3	79.0
0.978000	37.2	1000.0	9.000	Off	10.0	35.8	73.0
1.470000	31.0	1000.0	9.000	Off	10.0	42.0	73.0
1.958000	30.8	1000.0	9.000	Off	10.0	42.2	73.0
2.450000	25.9	1000.0	9.000	Off	10.0	47.1	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.186000	38.2	1000.0	9.000	Off	10.0	27.8	66.0
0.494000	40.6	1000.0	9.000	Off	10.0	25.4	66.0
0.978000	36.6	1000.0	9.000	Off	10.0	23.4	60.0
1.470000	30.2	1000.0	9.000	Off	10.0	29.8	60.0
1.958000	29.8	1000.0	9.000	Off	10.0	30.2	60.0
2.450000	24.4	1000.0	9.000	Off	10.0	35.6	60.0

For adaptor: adapter 3_FY2401500S3, BLE mode

Line Under Test: Line L (DC Output, charging mode, 230V~/50Hz)

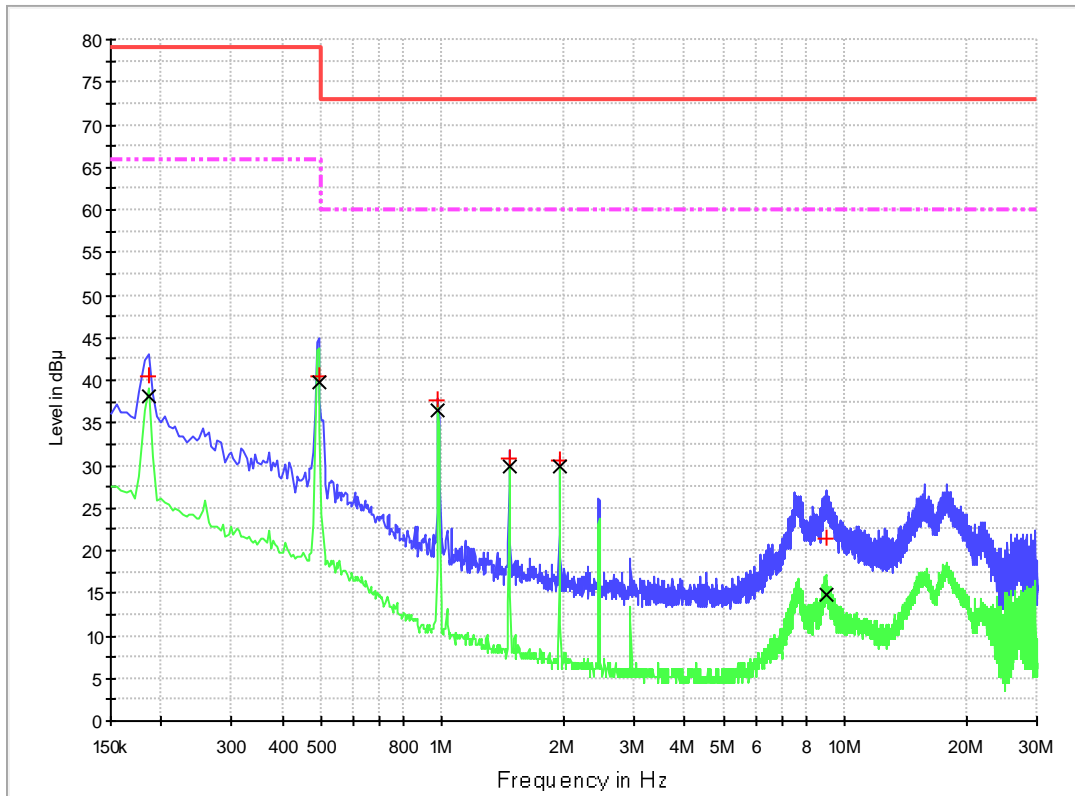

Graphical Results - Line L

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.186000	40.6	1000.0	9.000	Off	10.0	38.4	79.0
0.494000	40.6	1000.0	9.000	Off	10.0	38.4	79.0
0.978000	37.6	1000.0	9.000	Off	10.0	35.4	73.0
1.470000	30.9	1000.0	9.000	Off	10.0	42.1	73.0
1.958000	30.6	1000.0	9.000	Off	10.0	42.4	73.0
9.010000	21.3	1000.0	9.000	Off	10.0	51.7	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.186000	38.0	1000.0	9.000	Off	10.0	28.0	66.0
0.494000	39.7	1000.0	9.000	Off	10.0	26.3	66.0
0.978000	36.5	1000.0	9.000	Off	10.0	23.5	60.0
1.470000	29.9	1000.0	9.000	Off	10.0	30.1	60.0
1.958000	29.9	1000.0	9.000	Off	10.0	30.1	60.0
9.010000	14.9	1000.0	9.000	Off	10.0	45.1	60.0

For adaptor: adapter 3_FY2401500S3, BLE mode

Line Under Test: Line N (DC Output, charging mode, 230V~/50Hz)

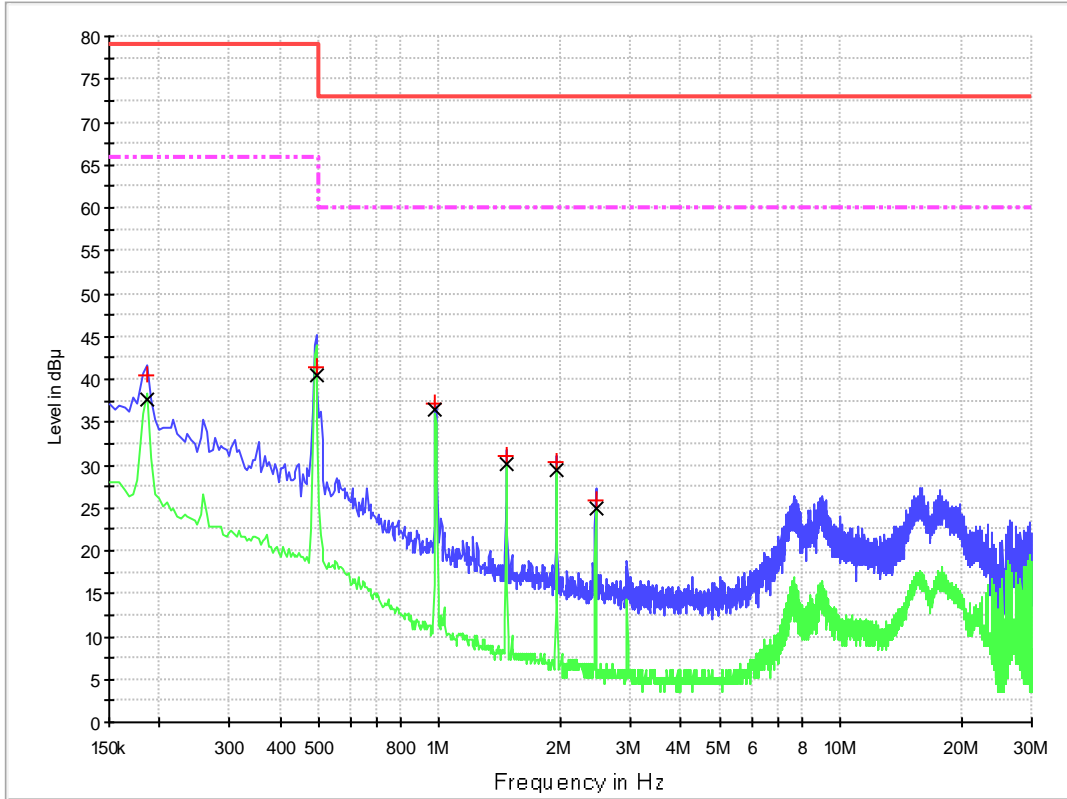

Graphical Results - Line N

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.186000	40.5	1000.0	9.000	Off	10.0	38.5	79.0
0.494000	41.3	1000.0	9.000	Off	10.0	37.7	79.0
0.978000	37.1	1000.0	9.000	Off	10.0	35.9	73.0
1.470000	31.1	1000.0	9.000	Off	10.0	41.9	73.0
1.958000	30.3	1000.0	9.000	Off	10.0	42.7	73.0
2.450000	25.9	1000.0	9.000	Off	10.0	47.1	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.186000	37.8	1000.0	9.000	Off	10.0	28.2	66.0
0.494000	40.6	1000.0	9.000	Off	10.0	25.4	66.0
0.978000	36.4	1000.0	9.000	Off	10.0	23.6	60.0
1.470000	30.2	1000.0	9.000	Off	10.0	29.8	60.0
1.958000	29.4	1000.0	9.000	Off	10.0	30.6	60.0
2.450000	24.9	1000.0	9.000	Off	10.0	35.1	60.0

For adaptor: adapter 3_FY2401500S3, BLE mode

Line Under Test: Line L (DC Output, running mode, 110V~/60Hz)

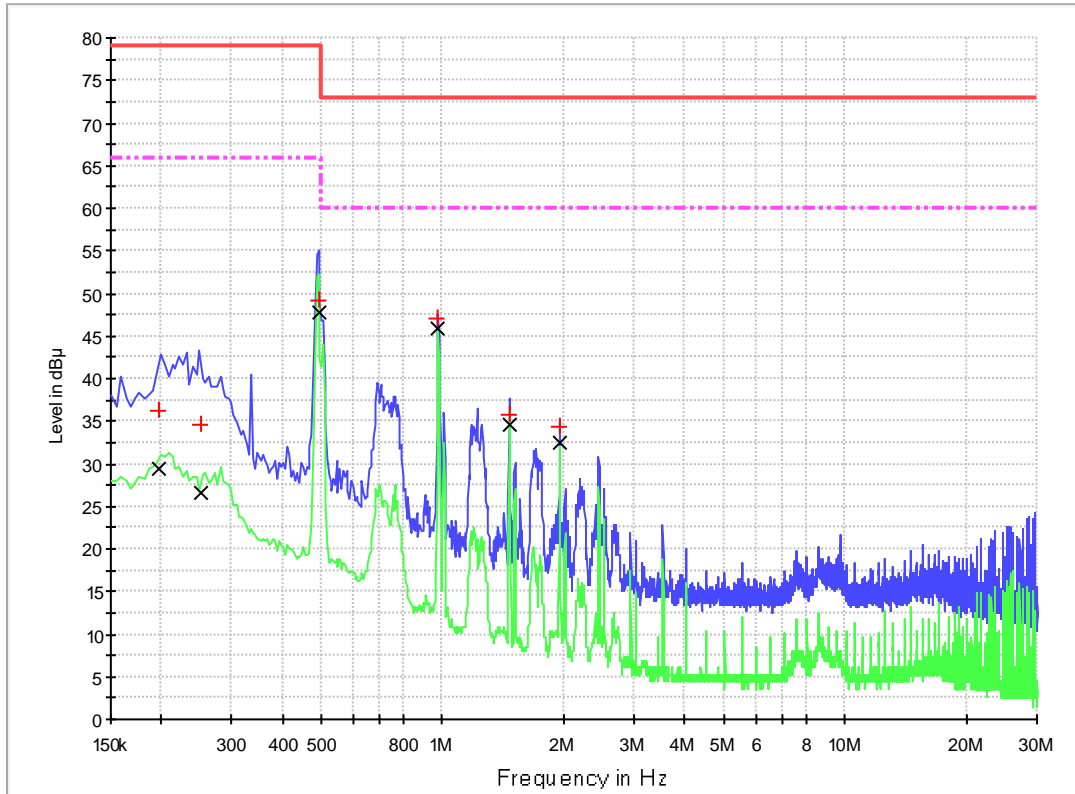

Graphical Results - Line L

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.198000	36.2	1000.0	9.000	Off	10.0	42.8	79.0
0.250000	34.6	1000.0	9.000	Off	10.0	44.4	79.0
0.494000	49.2	1000.0	9.000	Off	10.0	29.8	79.0
0.978000	47.0	1000.0	9.000	Off	10.0	26.0	73.0
1.470000	35.7	1000.0	9.000	Off	10.0	37.3	73.0
1.958000	34.3	1000.0	9.000	Off	10.0	38.7	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.198000	29.5	1000.0	9.000	Off	10.0	36.5	66.0
0.250000	26.5	1000.0	9.000	Off	10.0	39.5	66.0
0.494000	47.8	1000.0	9.000	Off	10.0	18.2	66.0
0.978000	45.9	1000.0	9.000	Off	10.0	14.1	60.0
1.470000	34.5	1000.0	9.000	Off	10.0	25.5	60.0
1.958000	32.4	1000.0	9.000	Off	10.0	27.6	60.0

For adaptor: adapter 3_FY2401500S3, BLE mode

Line Under Test: Line N (DC Output, running mode, 110V~/60Hz)

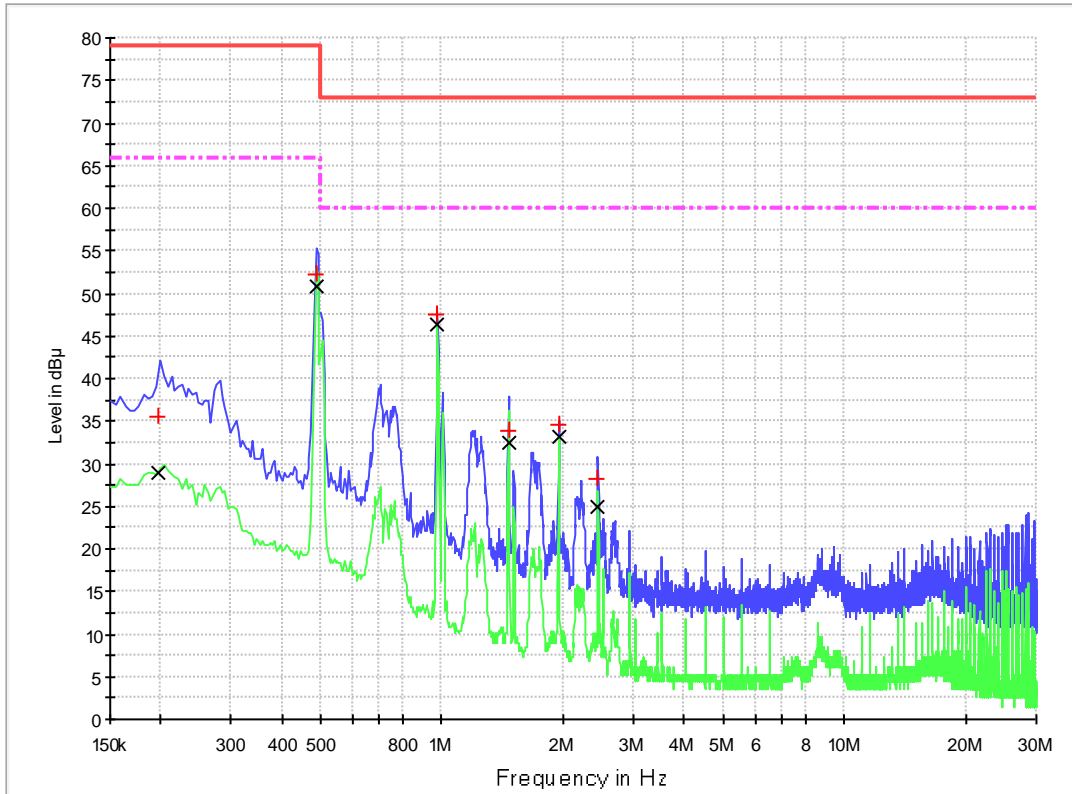

Graphical Results - Line N

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.198000	35.6	1000.0	9.000	Off	10.0	43.4	79.0
0.486000	52.3	1000.0	9.000	Off	10.0	26.7	79.0
0.978000	47.4	1000.0	9.000	Off	10.0	25.6	73.0
1.470000	33.8	1000.0	9.000	Off	10.0	39.2	73.0
1.954000	34.5	1000.0	9.000	Off	10.0	38.5	73.0
2.446000	28.1	1000.0	9.000	Off	10.0	44.9	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.198000	29.0	1000.0	9.000	Off	10.0	37.0	66.0
0.486000	50.9	1000.0	9.000	Off	10.0	15.1	66.0
0.978000	46.3	1000.0	9.000	Off	10.0	13.7	60.0
1.470000	32.4	1000.0	9.000	Off	10.0	27.6	60.0
1.954000	33.2	1000.0	9.000	Off	10.0	26.8	60.0
2.446000	25.0	1000.0	9.000	Off	10.0	35.0	60.0

For adaptor: adapter 3_FY2401500S3, BLE mode

Line Under Test: Line L (DC Output, running mode, 230V~/50Hz)

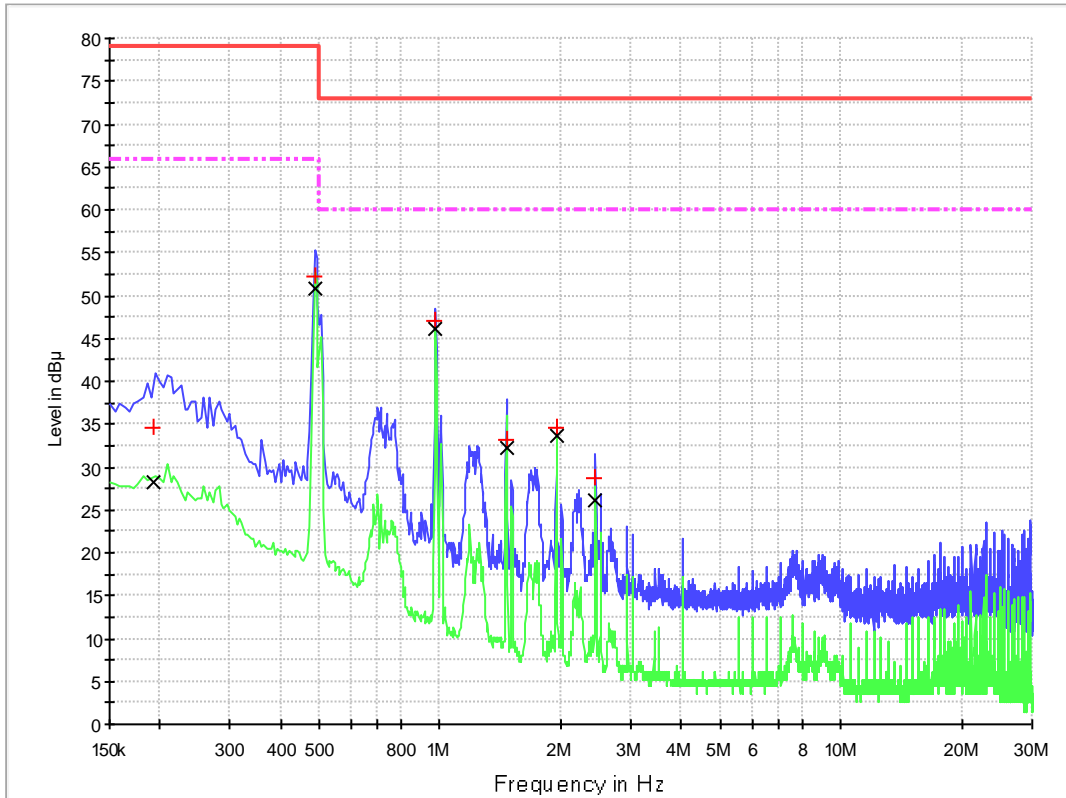

Graphical Results - Line L

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.194000	34.6	1000.0	9.000	Off	10.0	44.4	79.0
0.486000	52.2	1000.0	9.000	Off	10.0	26.8	79.0
0.978000	47.1	1000.0	9.000	Off	10.0	25.9	73.0
1.470000	33.2	1000.0	9.000	Off	10.0	39.8	73.0
1.954000	34.7	1000.0	9.000	Off	10.0	38.3	73.0
2.446000	28.7	1000.0	9.000	Off	10.0	44.3	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.194000	28.3	1000.0	9.000	Off	10.0	37.7	66.0
0.486000	50.8	1000.0	9.000	Off	10.0	15.2	66.0
0.978000	46.2	1000.0	9.000	Off	10.0	13.8	60.0
1.470000	32.3	1000.0	9.000	Off	10.0	27.7	60.0
1.954000	33.7	1000.0	9.000	Off	10.0	26.3	60.0
2.446000	26.2	1000.0	9.000	Off	10.0	33.8	60.0

For adaptor: adapter 3_FY2401500S3, BLE mode

Line Under Test: Line N (DC Output, running mode, 230V~/50Hz)

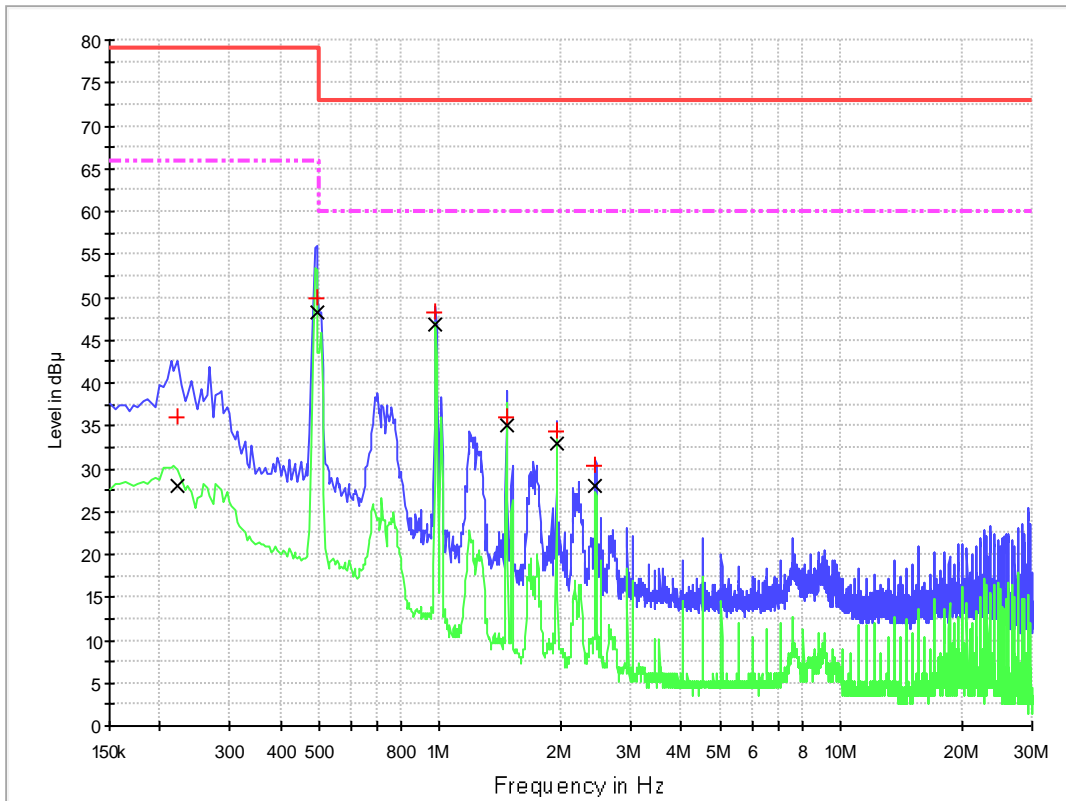

Graphical Results - Line N


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.222000	36.1	1000.0	9.000	Off	10.0	42.9	79.0
0.494000	49.8	1000.0	9.000	Off	10.0	29.2	79.0
0.978000	48.2	1000.0	9.000	Off	10.0	24.8	73.0
1.470000	36.1	1000.0	9.000	Off	10.0	36.9	73.0
1.958000	34.5	1000.0	9.000	Off	10.0	38.5	73.0
2.446000	30.4	1000.0	9.000	Off	10.0	42.6	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.222000	28.0	1000.0	9.000	Off	10.0	38.0	66.0
0.494000	48.3	1000.0	9.000	Off	10.0	17.7	66.0
0.978000	46.9	1000.0	9.000	Off	10.0	13.1	60.0
1.470000	35.0	1000.0	9.000	Off	10.0	25.0	60.0
1.958000	33.0	1000.0	9.000	Off	10.0	27.0	60.0
2.446000	27.9	1000.0	9.000	Off	10.0	32.1	60.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Line Under Test: Line L (110V~/60Hz, Charging mode)

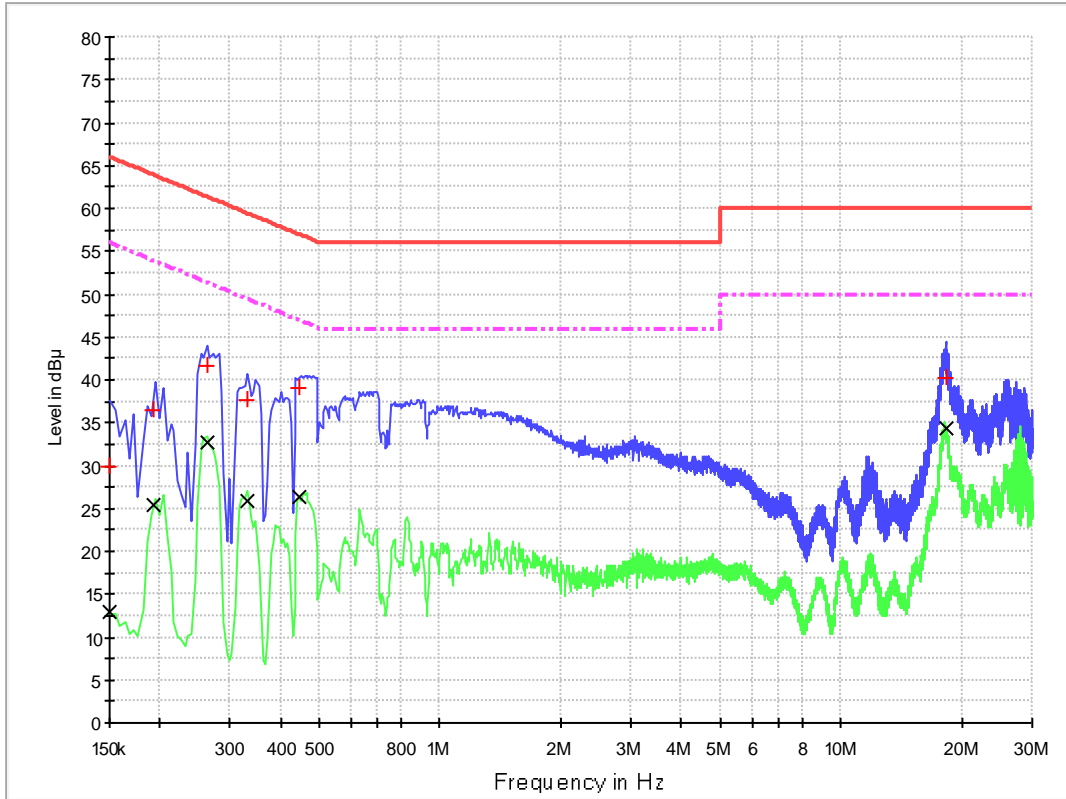

Graphical Results - Line L

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	29.9	1000.0	9.000	Off	L1	10.0	36.1	66.0
0.194000	36.5	1000.0	9.000	Off	L1	10.0	27.4	63.9
0.262000	41.5	1000.0	9.000	Off	L1	10.0	19.8	61.4
0.330000	37.7	1000.0	9.000	Off	L1	10.0	21.7	59.5
0.446000	39.1	1000.0	9.000	Off	L1	10.0	17.8	56.9
18.218000	40.3	1000.0	9.000	Off	L1	10.0	19.7	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	12.8	1000.0	9.000	Off	L1	10.0	43.2	56.0
0.194000	25.4	1000.0	9.000	Off	L1	10.0	28.4	53.9
0.262000	32.7	1000.0	9.000	Off	L1	10.0	18.7	51.4
0.330000	25.8	1000.0	9.000	Off	L1	10.0	23.6	49.5
0.446000	26.4	1000.0	9.000	Off	L1	10.0	20.6	46.9
18.218000	34.4	1000.0	9.000	Off	L1	10.0	15.6	50.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Line Under Test: Line N (110V~/60Hz, Charging mode)

Voltage

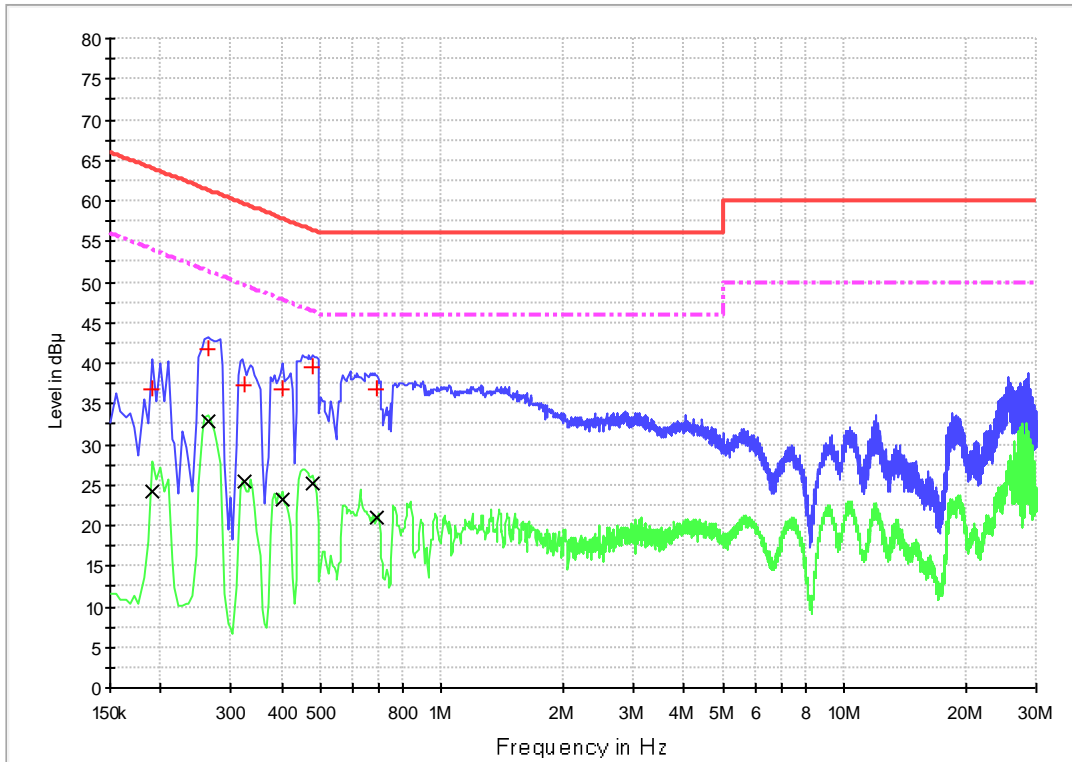

Graphical Results - Line N


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.190000	36.8	1000.0	9.000	Off	N	10.0	27.2	64.0
0.262000	41.7	1000.0	9.000	Off	N	10.0	19.7	61.4
0.322000	37.3	1000.0	9.000	Off	N	10.0	22.4	59.7
0.402000	36.8	1000.0	9.000	Off	N	10.0	21.0	57.8
0.478000	39.4	1000.0	9.000	Off	N	10.0	17.0	56.4
0.690000	36.8	1000.0	9.000	Off	N	10.0	19.2	56.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.190000	24.3	1000.0	9.000	Off	N	10.0	29.7	54.0
0.262000	32.9	1000.0	9.000	Off	N	10.0	18.5	51.4
0.322000	25.4	1000.0	9.000	Off	N	10.0	24.3	49.7
0.402000	23.1	1000.0	9.000	Off	N	10.0	24.7	47.8
0.478000	25.2	1000.0	9.000	Off	N	10.0	21.2	46.4
0.690000	21.1	1000.0	9.000	Off	N	10.0	24.9	46.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Line Under Test: Line L (230V~/50Hz, Charging mode)

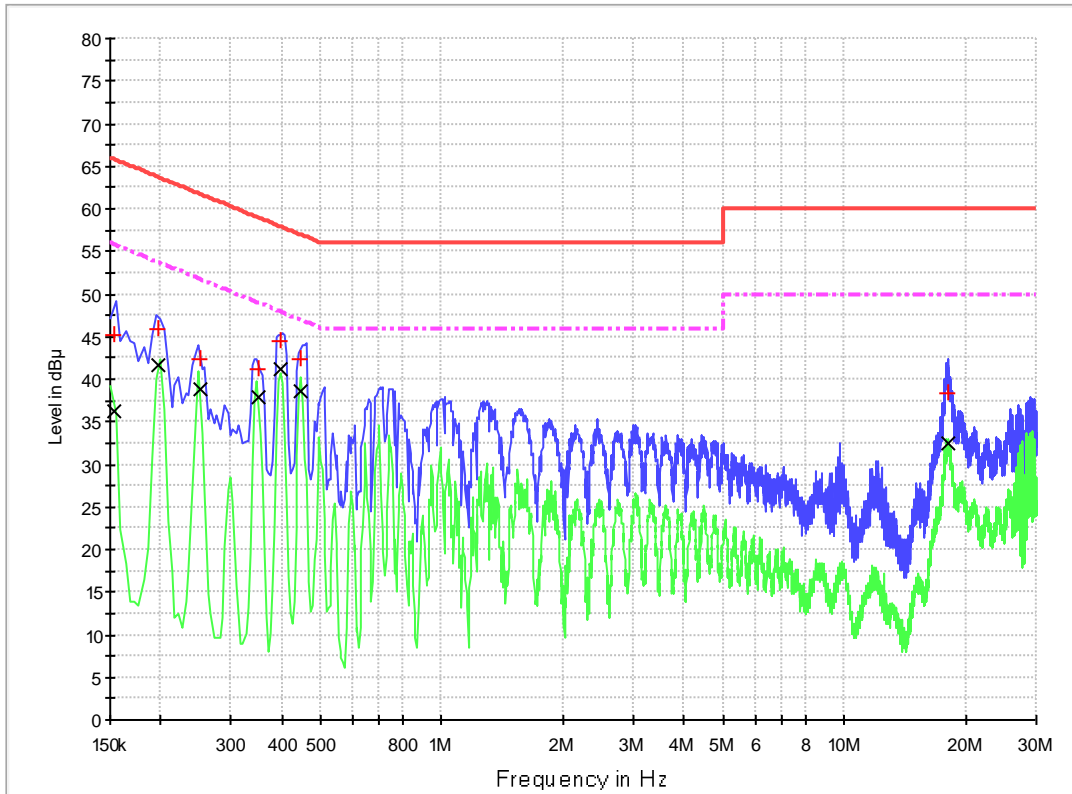


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.154000	45.1	1000.0	9.000	Off	L1	10.0	20.7	65.8
0.198000	45.9	1000.0	9.000	Off	L1	10.0	17.8	63.7
0.250000	42.3	1000.0	9.000	Off	L1	10.0	19.5	61.8
0.350000	41.3	1000.0	9.000	Off	L1	10.0	17.7	59.0
0.398000	44.4	1000.0	9.000	Off	L1	10.0	13.5	57.9
0.446000	42.4	1000.0	9.000	Off	L1	10.0	14.5	56.9
18.090000	38.4	1000.0	9.000	Off	L1	10.0	21.6	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.154000	36.2	1000.0	9.000	Off	L1	10.0	19.6	55.8
0.198000	41.6	1000.0	9.000	Off	L1	10.0	12.1	53.7
0.250000	38.9	1000.0	9.000	Off	L1	10.0	12.9	51.8
0.350000	37.8	1000.0	9.000	Off	L1	10.0	11.2	49.0
0.398000	41.2	1000.0	9.000	Off	L1	10.0	6.7	47.9
0.446000	38.6	1000.0	9.000	Off	L1	10.0	8.4	46.9
18.090000	32.4	1000.0	9.000	Off	L1	10.0	17.6	50.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Line Under Test: Line N (230V~/50Hz, Charging mode)

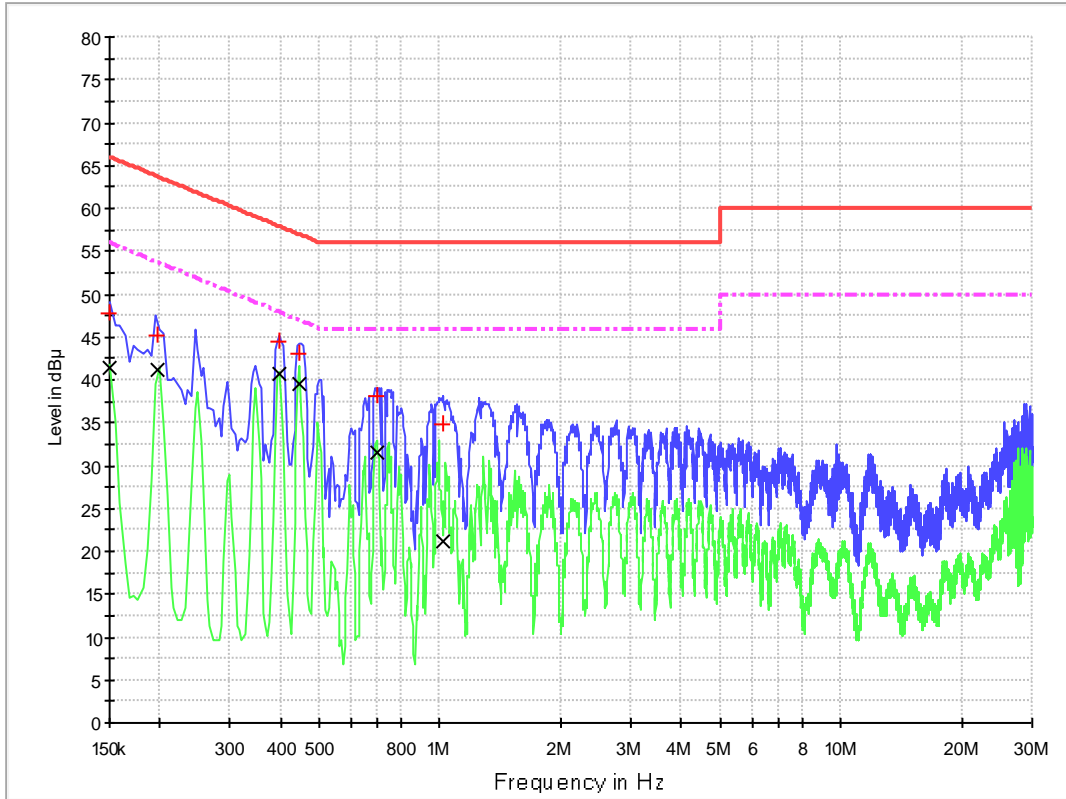

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	47.7	1000.0	9.000	Off	N	10.0	18.3	66.0
0.198000	45.1	1000.0	9.000	Off	N	10.0	18.6	63.7
0.398000	44.4	1000.0	9.000	Off	N	10.0	13.5	57.9
0.446000	43.2	1000.0	9.000	Off	N	10.0	13.8	56.9
0.698000	38.2	1000.0	9.000	Off	N	10.0	17.8	56.0
1.018000	34.8	1000.0	9.000	Off	N	10.0	21.2	56.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	41.4	1000.0	9.000	Off	N	10.0	14.6	56.0
0.198000	41.3	1000.0	9.000	Off	N	10.0	12.4	53.7
0.398000	40.7	1000.0	9.000	Off	N	10.0	7.2	47.9
0.446000	39.6	1000.0	9.000	Off	N	10.0	7.4	46.9
0.698000	31.6	1000.0	9.000	Off	N	10.0	14.4	46.0
1.018000	21.1	1000.0	9.000	Off	N	10.0	24.9	46.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Line Under Test: Line L (110V~/60Hz, Running mode)

Voltage

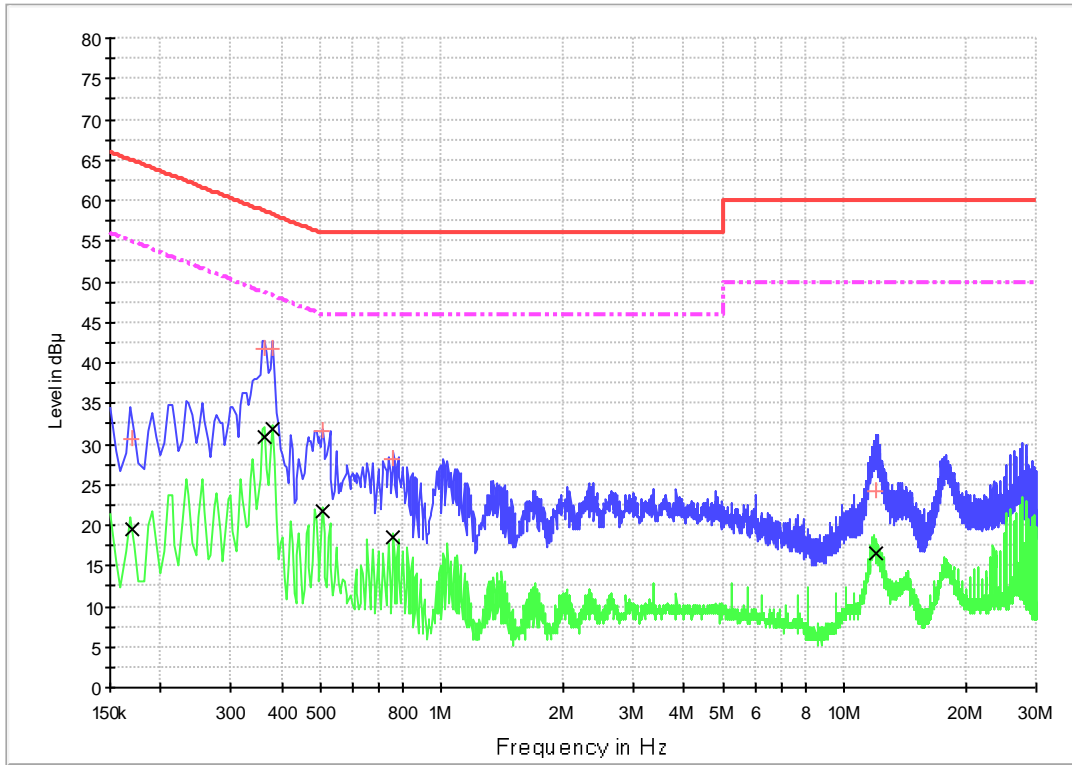

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.170000	30.7	1000.0	9.000	Off	L1	10.0	34.3	65.0
0.362000	41.6	1000.0	9.000	Off	L1	10.0	17.0	58.7
0.378000	41.8	1000.0	9.000	Off	L1	10.0	16.5	58.3
0.506000	31.7	1000.0	9.000	Off	L1	10.0	24.3	56.0
0.758000	28.1	1000.0	9.000	Off	L1	10.0	27.9	56.0
11.966000	24.1	1000.0	9.000	Off	L1	10.0	35.9	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.170000	19.5	1000.0	9.000	Off	L1	10.0	35.4	55.0
0.362000	30.9	1000.0	9.000	Off	L1	10.0	17.8	48.7
0.378000	31.8	1000.0	9.000	Off	L1	10.0	16.5	48.3
0.506000	21.7	1000.0	9.000	Off	L1	10.0	24.3	46.0
0.758000	18.6	1000.0	9.000	Off	L1	10.0	27.4	46.0
11.966000	16.5	1000.0	9.000	Off	L1	10.0	33.5	50.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Line Under Test: Line N (110V~/60Hz, Running mode)

Voltage

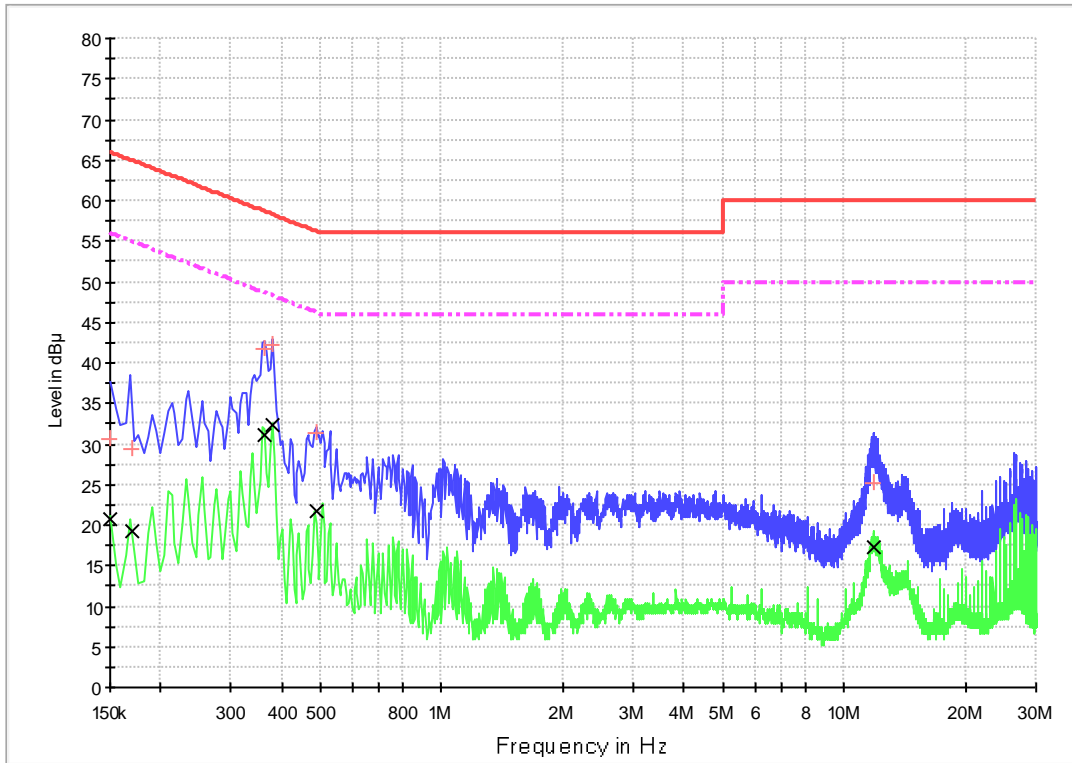

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	30.5	1000.0	9.000	Off	N	10.0	35.5	66.0
0.170000	29.5	1000.0	9.000	Off	N	10.0	35.5	65.0
0.362000	41.6	1000.0	9.000	Off	N	10.0	17.1	58.7
0.378000	42.2	1000.0	9.000	Off	N	10.0	16.1	58.3
0.486000	31.4	1000.0	9.000	Off	N	10.0	24.8	56.2
11.842000	25.2	1000.0	9.000	Off	N	10.0	34.8	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	20.6	1000.0	9.000	Off	N	10.0	35.4	56.0
0.170000	19.3	1000.0	9.000	Off	N	10.0	35.6	55.0
0.362000	31.0	1000.0	9.000	Off	N	10.0	17.7	48.7
0.378000	32.3	1000.0	9.000	Off	N	10.0	16.0	48.3
0.486000	21.7	1000.0	9.000	Off	N	10.0	24.6	46.2
11.842000	17.4	1000.0	9.000	Off	N	10.0	32.6	50.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Line Under Test: Line L (230V~/50Hz, Running mode)

Voltage

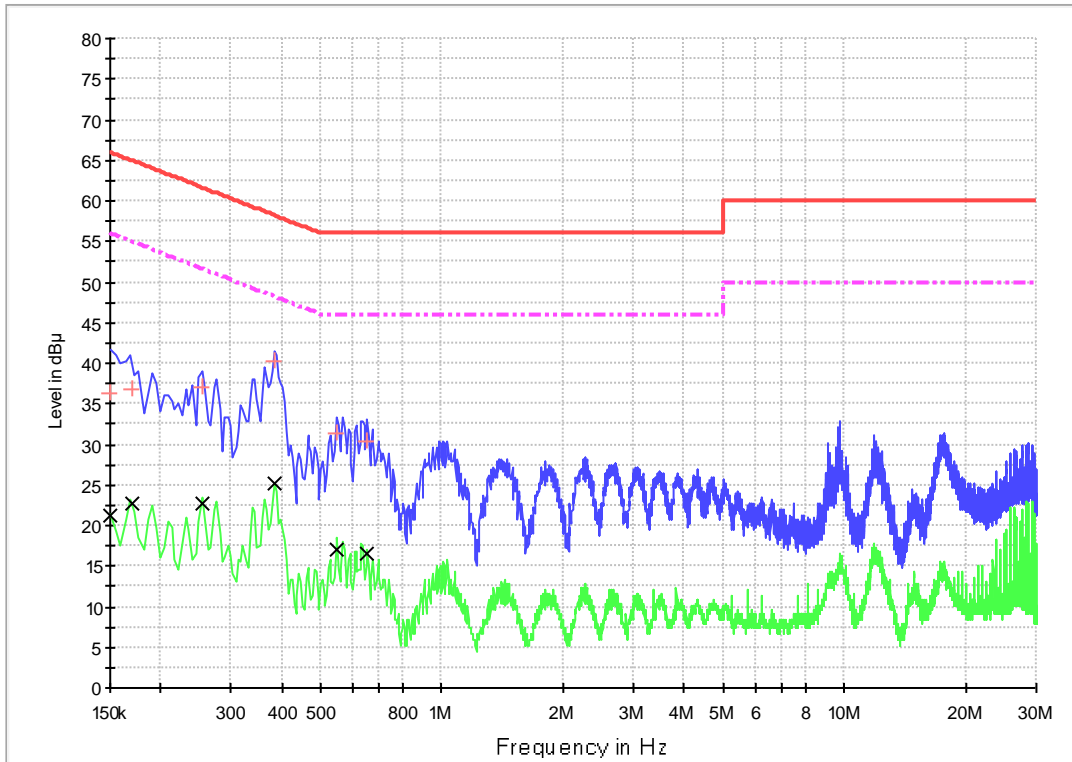

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	36.4	1000.0	9.000	Off	L1	10.0	29.6	66.0
0.170000	36.7	1000.0	9.000	Off	L1	10.0	28.2	65.0
0.254000	37.1	1000.0	9.000	Off	L1	10.0	24.6	61.6
0.386000	40.2	1000.0	9.000	Off	L1	10.0	18.0	58.1
0.546000	31.5	1000.0	9.000	Off	L1	10.0	24.5	56.0
0.654000	30.4	1000.0	9.000	Off	L1	10.0	25.6	56.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	21.3	1000.0	9.000	Off	L1	10.0	34.7	56.0
0.170000	22.8	1000.0	9.000	Off	L1	10.0	32.2	55.0
0.254000	22.8	1000.0	9.000	Off	L1	10.0	28.8	51.6
0.386000	25.3	1000.0	9.000	Off	L1	10.0	22.9	48.1
0.546000	17.1	1000.0	9.000	Off	L1	10.0	28.9	46.0
0.654000	16.5	1000.0	9.000	Off	L1	10.0	29.5	46.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode
 Line Under Test: Line N (230V~/50Hz, Running mode)

Voltage

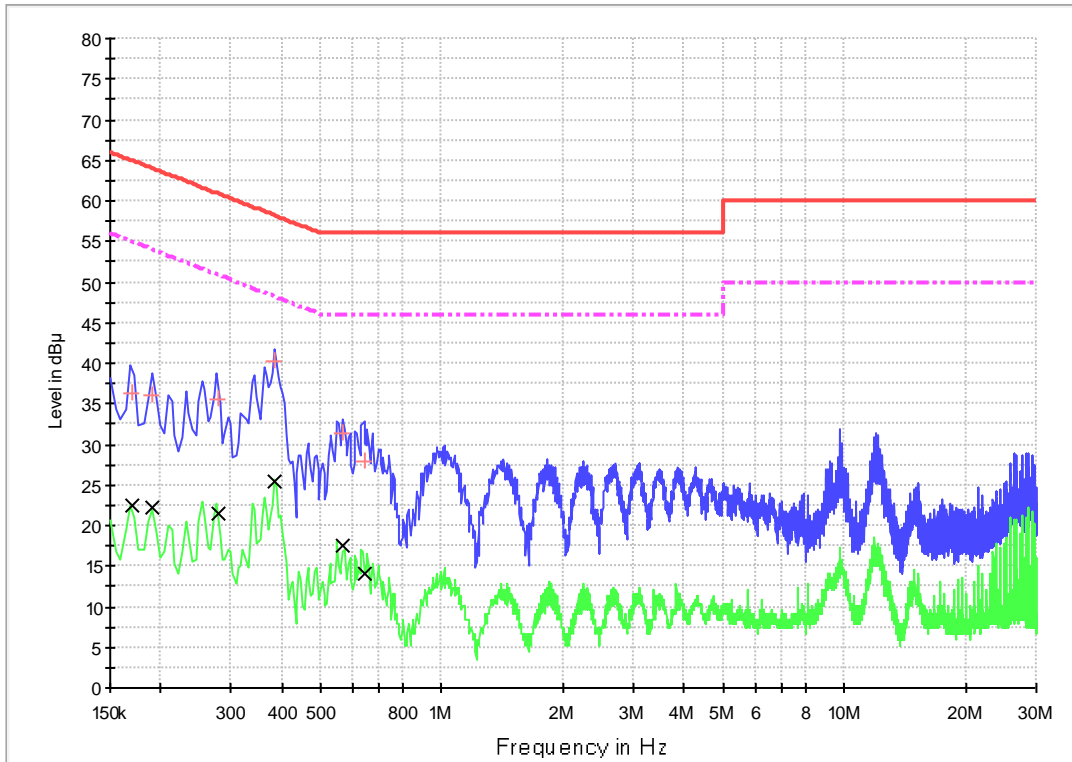

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.170000	36.3	1000.0	9.000	Off	N	10.0	28.6	65.0
0.190000	35.9	1000.0	9.000	Off	N	10.0	28.1	64.0
0.278000	35.4	1000.0	9.000	Off	N	10.0	25.4	60.9
0.386000	40.2	1000.0	9.000	Off	N	10.0	18.0	58.1
0.570000	31.3	1000.0	9.000	Off	N	10.0	24.7	56.0
0.642000	28.0	1000.0	9.000	Off	N	10.0	28.0	56.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.170000	22.4	1000.0	9.000	Off	N	10.0	32.6	55.0
0.190000	22.2	1000.0	9.000	Off	N	10.0	31.9	54.0
0.278000	21.4	1000.0	9.000	Off	N	10.0	29.5	50.9
0.386000	25.4	1000.0	9.000	Off	N	10.0	22.8	48.1
0.570000	17.4	1000.0	9.000	Off	N	10.0	28.6	46.0
0.642000	14.0	1000.0	9.000	Off	N	10.0	32.0	46.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode

Line Under Test: Line Positive (DC Input, charging mode, 110V~/60Hz)

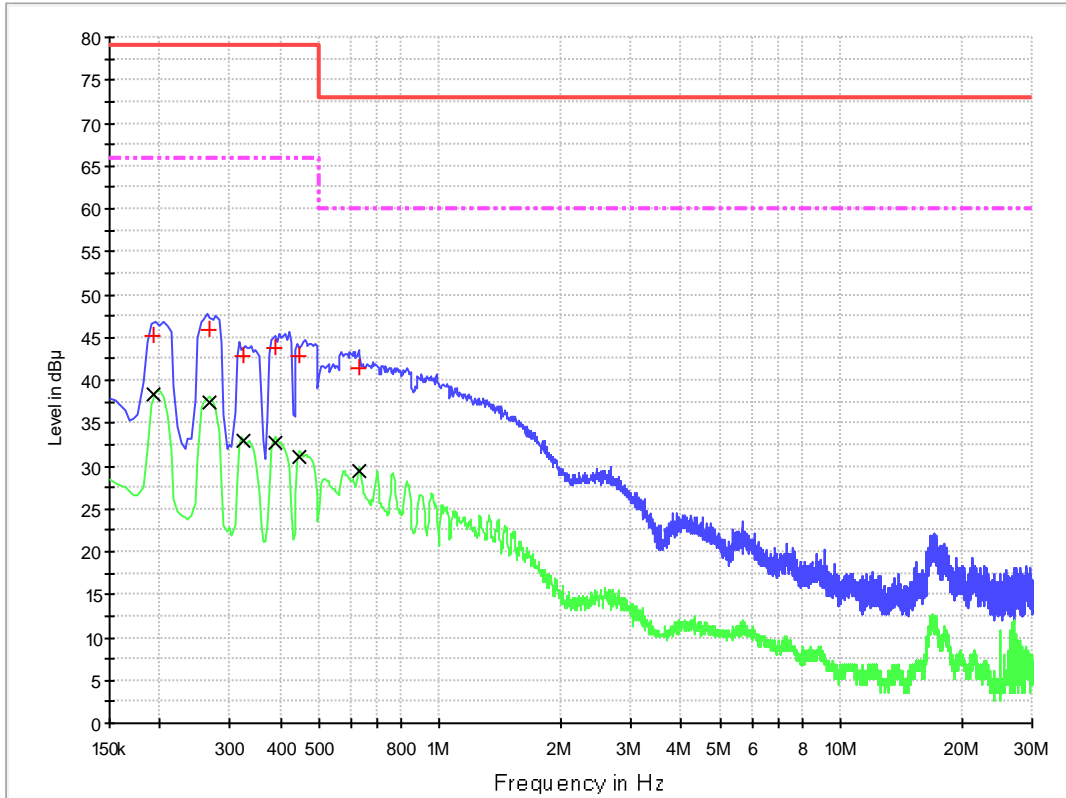

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.194000	45.2	1000.0	9.000	Off	10.0	33.8	79.0
0.266000	45.9	1000.0	9.000	Off	10.0	33.1	79.0
0.322000	42.7	1000.0	9.000	Off	10.0	36.3	79.0
0.390000	43.8	1000.0	9.000	Off	10.0	35.2	79.0
0.446000	42.8	1000.0	9.000	Off	10.0	36.2	79.0
0.630000	41.5	1000.0	9.000	Off	10.0	31.5	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.194000	38.4	1000.0	9.000	Off	10.0	40.6	79.0
0.266000	37.5	1000.0	9.000	Off	10.0	41.5	79.0
0.322000	33.1	1000.0	9.000	Off	10.0	45.9	79.0
0.390000	32.6	1000.0	9.000	Off	10.0	46.4	79.0
0.446000	31.1	1000.0	9.000	Off	10.0	47.9	79.0
0.630000	29.5	1000.0	9.000	Off	10.0	43.5	73.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode

Line Under Test: Line Negative (DC Input, charging mode, 110V~/60Hz)

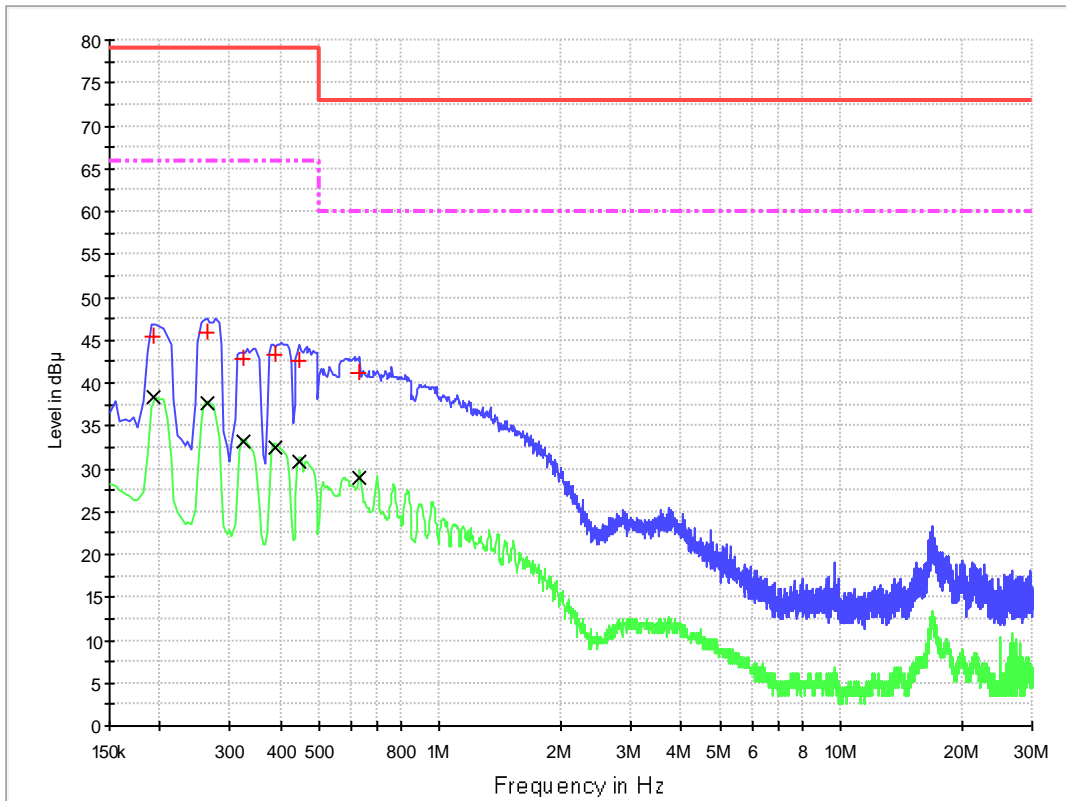

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.194000	45.4	1000.0	9.000	Off	10.0	33.6	79.0
0.262000	45.8	1000.0	9.000	Off	10.0	33.2	79.0
0.322000	42.9	1000.0	9.000	Off	10.0	36.1	79.0
0.390000	43.2	1000.0	9.000	Off	10.0	35.8	79.0
0.446000	42.7	1000.0	9.000	Off	10.0	36.3	79.0
0.630000	41.3	1000.0	9.000	Off	10.0	31.7	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.194000	38.4	1000.0	9.000	Off	10.0	27.6	66.0
0.262000	37.6	1000.0	9.000	Off	10.0	28.4	66.0
0.322000	33.1	1000.0	9.000	Off	10.0	32.9	66.0
0.390000	32.4	1000.0	9.000	Off	10.0	33.6	66.0
0.446000	30.8	1000.0	9.000	Off	10.0	35.2	66.0
0.630000	29.1	1000.0	9.000	Off	10.0	30.9	60.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode

Line Under Test: Line Positive (DC Input, charging mode, 230V~/50Hz)

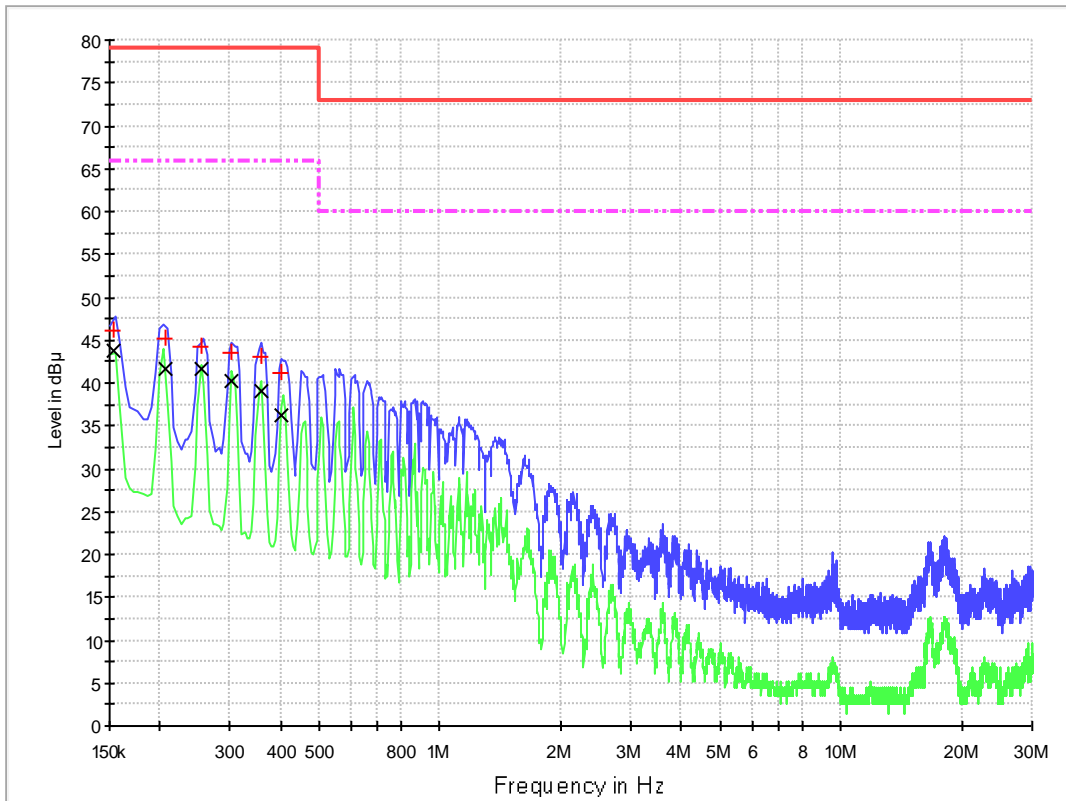

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.154000	46.1	1000.0	9.000	Off	10.0	32.9	79.0
0.206000	45.1	1000.0	9.000	Off	10.0	33.9	79.0
0.254000	44.2	1000.0	9.000	Off	10.0	34.8	79.0
0.302000	43.6	1000.0	9.000	Off	10.0	35.4	79.0
0.358000	43.1	1000.0	9.000	Off	10.0	35.9	79.0
0.402000	41.3	1000.0	9.000	Off	10.0	37.7	79.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.154000	43.7	1000.0	9.000	Off	10.0	22.3	66.0
0.206000	41.7	1000.0	9.000	Off	10.0	24.3	66.0
0.254000	41.6	1000.0	9.000	Off	10.0	24.4	66.0
0.302000	40.2	1000.0	9.000	Off	10.0	25.8	66.0
0.358000	39.1	1000.0	9.000	Off	10.0	26.9	66.0
0.402000	36.2	1000.0	9.000	Off	10.0	29.8	66.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode

Line Under Test: Line Negative (DC Input, charging mode, 230V~/50Hz)

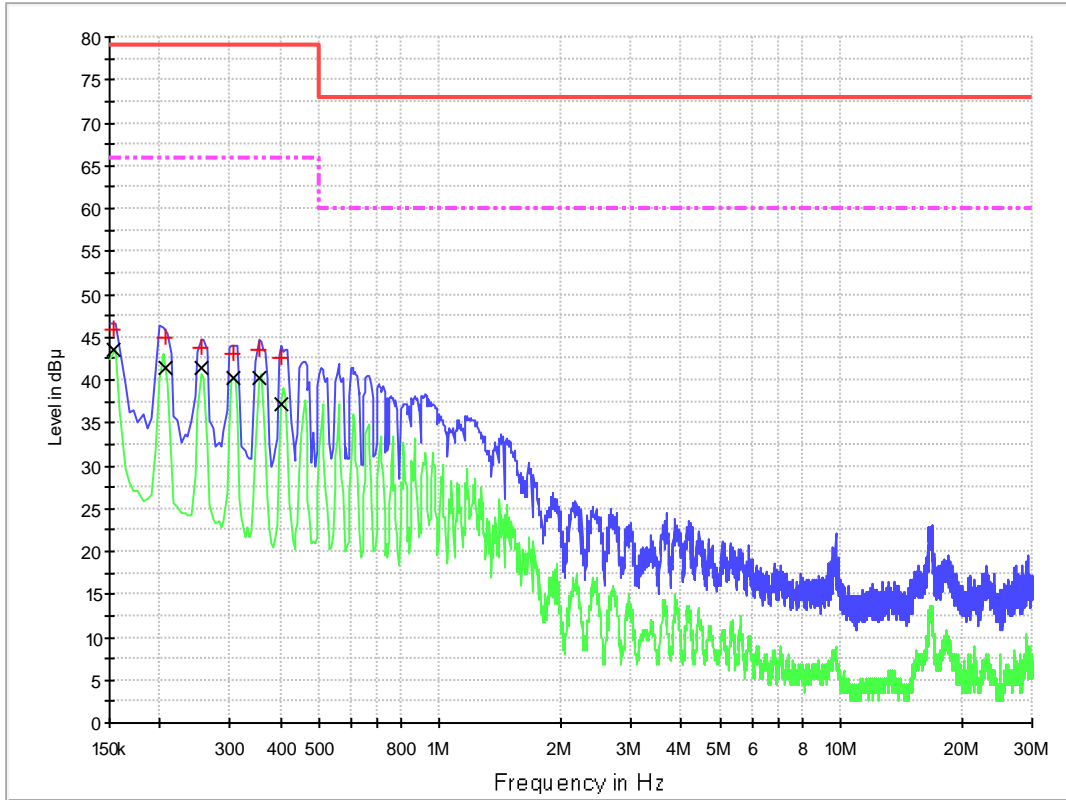

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.154000	46.0	1000.0	9.000	Off	10.0	33.0	79.0
0.206000	45.0	1000.0	9.000	Off	10.0	34.0	79.0
0.254000	43.7	1000.0	9.000	Off	10.0	35.3	79.0
0.306000	43.1	1000.0	9.000	Off	10.0	35.9	79.0
0.354000	43.5	1000.0	9.000	Off	10.0	35.5	79.0
0.402000	42.5	1000.0	9.000	Off	10.0	36.5	79.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.154000	43.5	1000.0	9.000	Off	10.0	22.5	66.0
0.206000	41.5	1000.0	9.000	Off	10.0	24.5	66.0
0.254000	41.3	1000.0	9.000	Off	10.0	24.7	66.0
0.306000	40.3	1000.0	9.000	Off	10.0	25.7	66.0
0.354000	40.2	1000.0	9.000	Off	10.0	25.8	66.0
0.402000	37.3	1000.0	9.000	Off	10.0	28.7	66.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode

Line Under Test: Line Positive (DC Input, running mode, 110V~/60Hz)

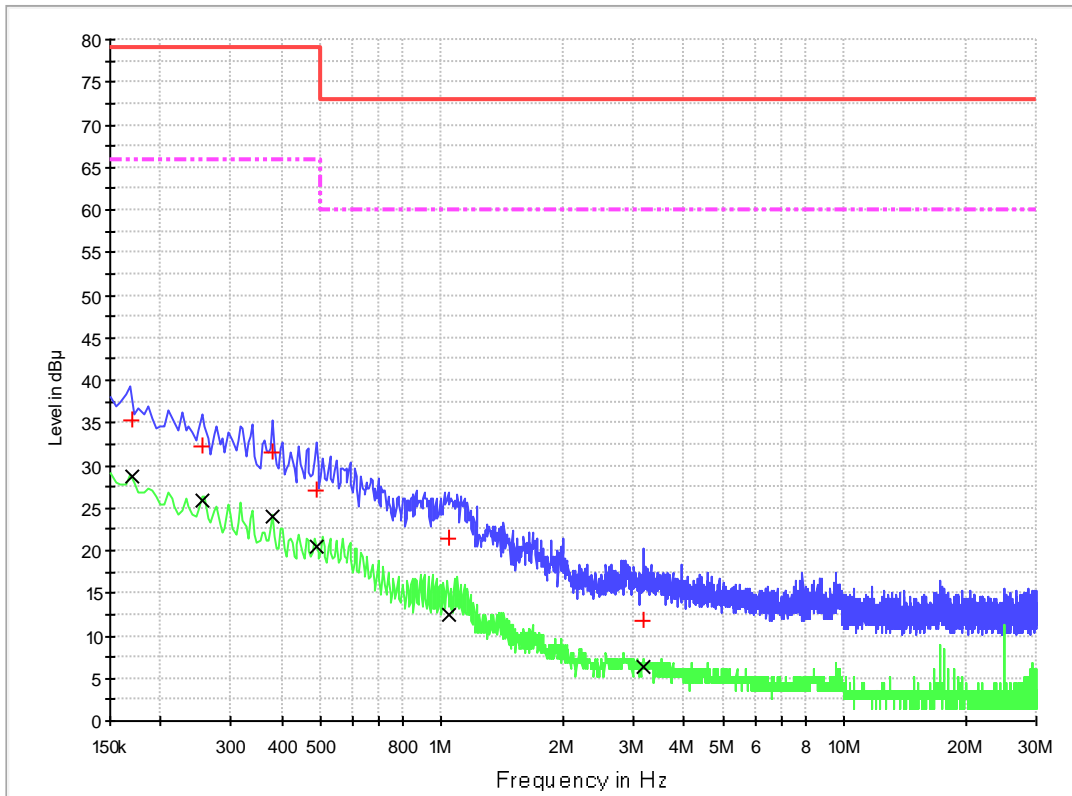

QP


Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV)
0.170000	35.3	1000.0	9.000	Off	10.0	43.7	79.0
0.254000	32.3	1000.0	9.000	Off	10.0	46.7	79.0
0.378000	31.5	1000.0	9.000	Off	10.0	47.5	79.0
0.486000	27.2	1000.0	9.000	Off	10.0	51.8	79.0
1.042000	21.3	1000.0	9.000	Off	10.0	51.7	73.0
3.166000	11.7	1000.0	9.000	Off	10.0	61.3	73.0

AV

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBμV)
0.170000	28.7	1000.0	9.000	Off	10.0	37.3	66.0
0.254000	26.0	1000.0	9.000	Off	10.0	40.0	66.0
0.378000	24.0	1000.0	9.000	Off	10.0	42.0	66.0
0.486000	20.6	1000.0	9.000	Off	10.0	45.4	66.0
1.042000	12.5	1000.0	9.000	Off	10.0	47.5	60.0
3.166000	6.3	1000.0	9.000	Off	10.0	53.7	60.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode

Line Under Test: Line Negative (DC Input, running mode, 110V~/60Hz)

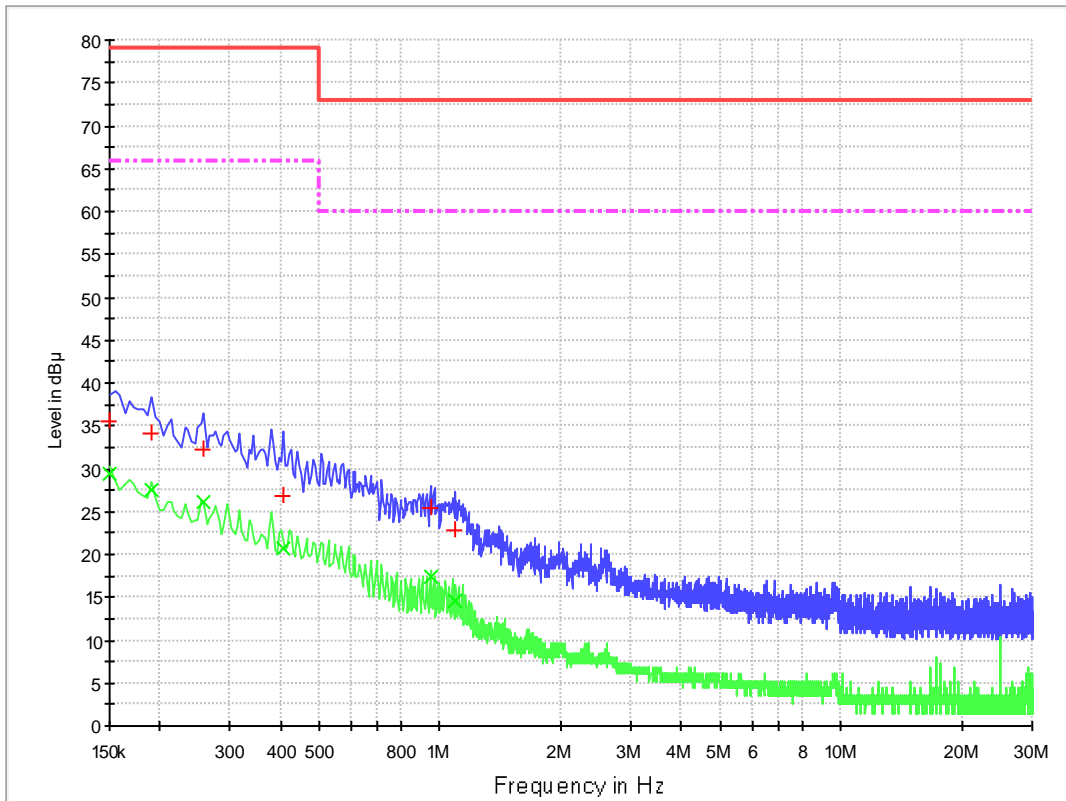

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	35.4	1000.0	9.000	Off	10.0	43.6	79.0
0.190000	34.1	1000.0	9.000	Off	10.0	44.9	79.0
0.258000	32.2	1000.0	9.000	Off	10.0	46.8	79.0
0.406000	26.8	1000.0	9.000	Off	10.0	52.2	79.0
0.946000	25.3	1000.0	9.000	Off	10.0	47.7	73.0
1.090000	22.9	1000.0	9.000	Off	10.0	50.1	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	29.3	1000.0	9.000	Off	10.0	36.7	66.0
0.190000	27.5	1000.0	9.000	Off	10.0	38.5	66.0
0.258000	26.0	1000.0	9.000	Off	10.0	40.0	66.0
0.406000	20.7	1000.0	9.000	Off	10.0	45.3	66.0
0.946000	17.4	1000.0	9.000	Off	10.0	42.6	60.0
1.090000	14.7	1000.0	9.000	Off	10.0	45.3	60.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode

Line Under Test: Line Positive (DC Input, running mode, 230V~/50Hz)

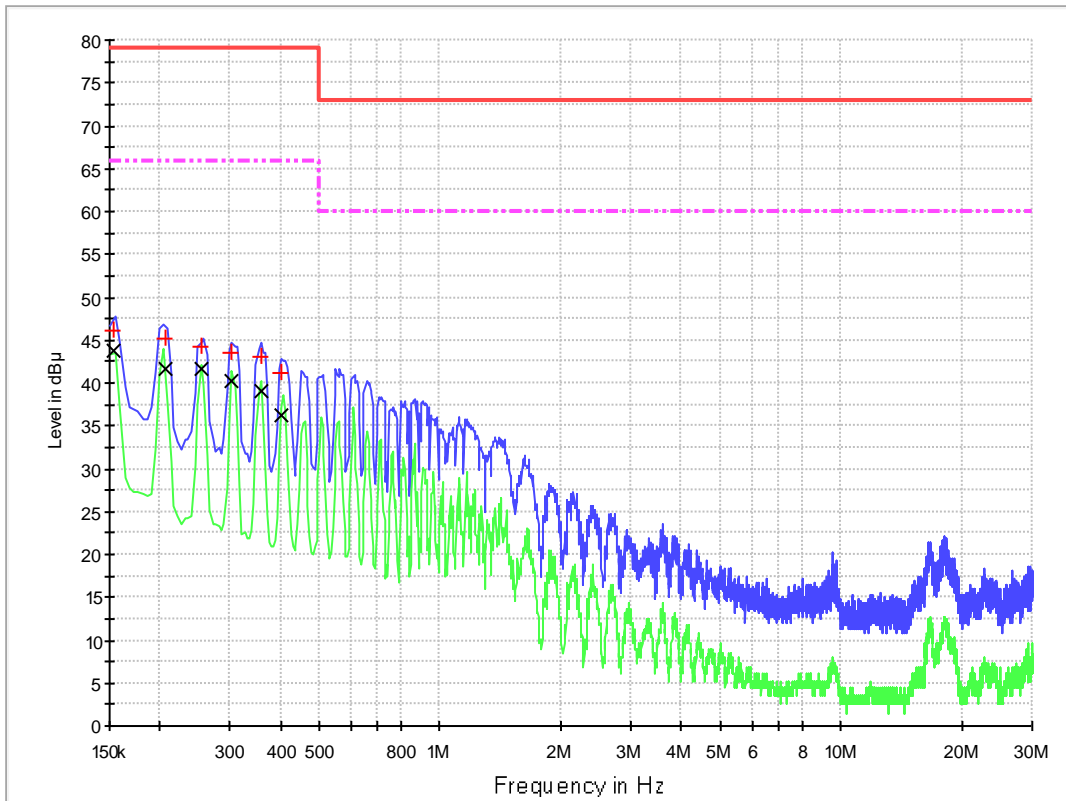

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.154000	46.1	1000.0	9.000	Off	10.0	32.9	79.0
0.206000	45.1	1000.0	9.000	Off	10.0	33.9	79.0
0.254000	44.2	1000.0	9.000	Off	10.0	34.8	79.0
0.302000	43.6	1000.0	9.000	Off	10.0	35.4	79.0
0.358000	43.1	1000.0	9.000	Off	10.0	35.9	79.0
0.402000	41.3	1000.0	9.000	Off	10.0	37.7	79.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.154000	43.7	1000.0	9.000	Off	10.0	22.3	66.0
0.206000	41.7	1000.0	9.000	Off	10.0	24.3	66.0
0.254000	41.6	1000.0	9.000	Off	10.0	24.4	66.0
0.302000	40.2	1000.0	9.000	Off	10.0	25.8	66.0
0.358000	39.1	1000.0	9.000	Off	10.0	26.9	66.0
0.402000	36.2	1000.0	9.000	Off	10.0	29.8	66.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode

Line Under Test: Line Negative (DC Input, running mode, 230V~/50Hz)

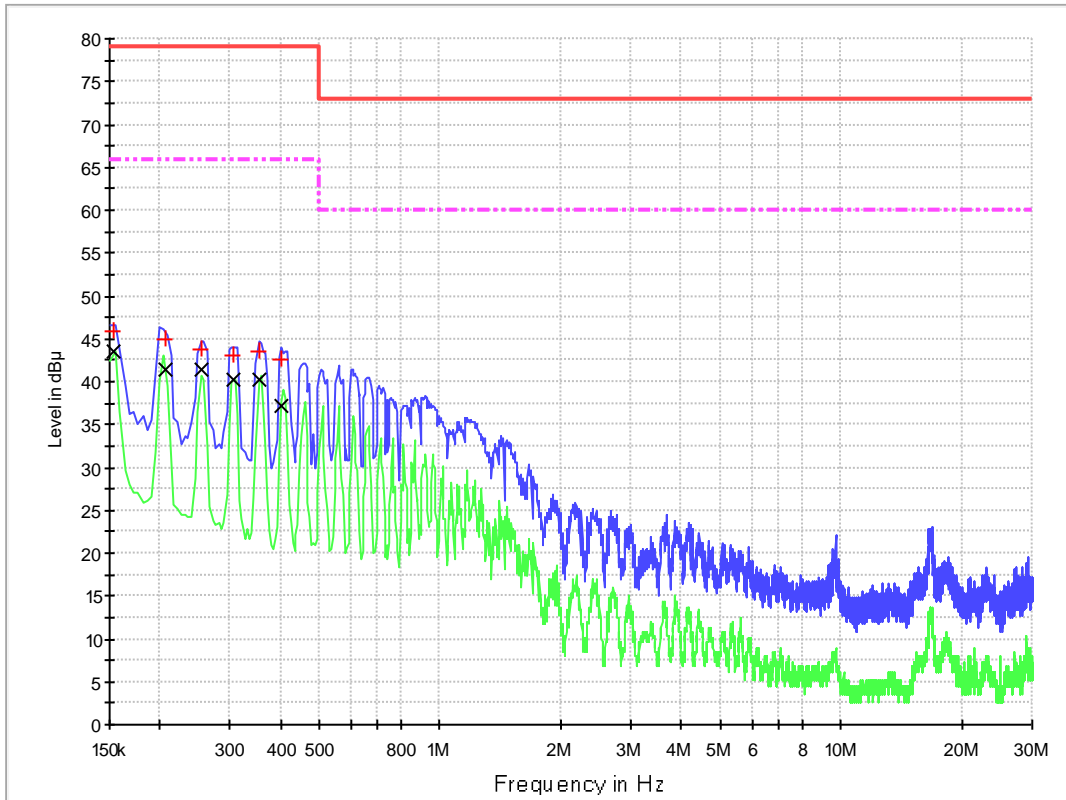

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.154000	46.0	1000.0	9.000	Off	10.0	33.0	79.0
0.206000	45.0	1000.0	9.000	Off	10.0	34.0	79.0
0.254000	43.7	1000.0	9.000	Off	10.0	35.3	79.0
0.306000	43.1	1000.0	9.000	Off	10.0	35.9	79.0
0.354000	43.5	1000.0	9.000	Off	10.0	35.5	79.0
0.402000	42.5	1000.0	9.000	Off	10.0	36.5	79.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.154000	43.5	1000.0	9.000	Off	10.0	22.5	66.0
0.206000	41.5	1000.0	9.000	Off	10.0	24.5	66.0
0.254000	41.3	1000.0	9.000	Off	10.0	24.7	66.0
0.306000	40.3	1000.0	9.000	Off	10.0	25.7	66.0
0.354000	40.2	1000.0	9.000	Off	10.0	25.8	66.0
0.402000	37.3	1000.0	9.000	Off	10.0	28.7	66.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode

Line Under Test: Line Positive (DC Output, charging mode, 110V~/60Hz)

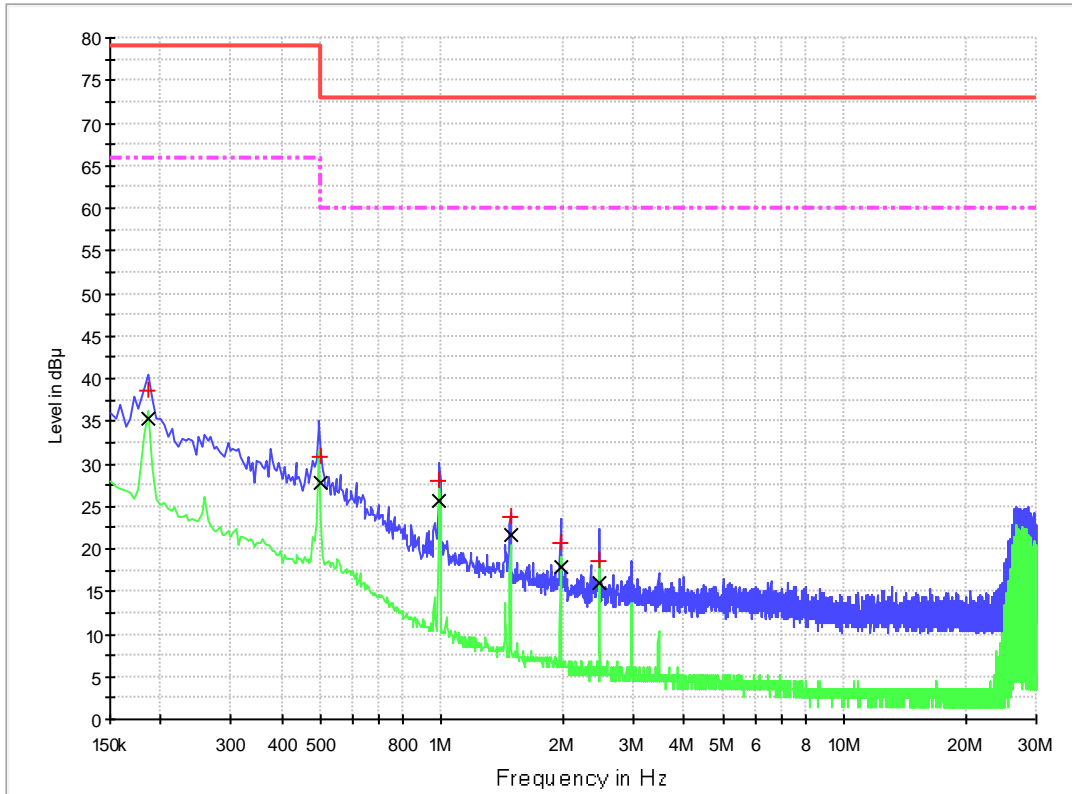

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.186000	38.5	1000.0	9.000	Off	10.0	40.5	79.0
0.498000	30.8	1000.0	9.000	Off	10.0	48.2	79.0
0.986000	28.1	1000.0	9.000	Off	10.0	44.9	73.0
1.482000	23.8	1000.0	9.000	Off	10.0	49.2	73.0
1.978000	20.7	1000.0	9.000	Off	10.0	52.3	73.0
2.466000	18.6	1000.0	9.000	Off	10.0	54.4	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.186000	35.3	1000.0	9.000	Off	10.0	30.7	66.0
0.498000	27.7	1000.0	9.000	Off	10.0	38.3	66.0
0.986000	25.6	1000.0	9.000	Off	10.0	34.4	60.0
1.482000	21.6	1000.0	9.000	Off	10.0	38.4	60.0
1.978000	18.0	1000.0	9.000	Off	10.0	42.0	60.0
2.466000	16.0	1000.0	9.000	Off	10.0	44.0	60.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode

Line Under Test: Line Negative (DC Output, charging mode, 110V~/60Hz)

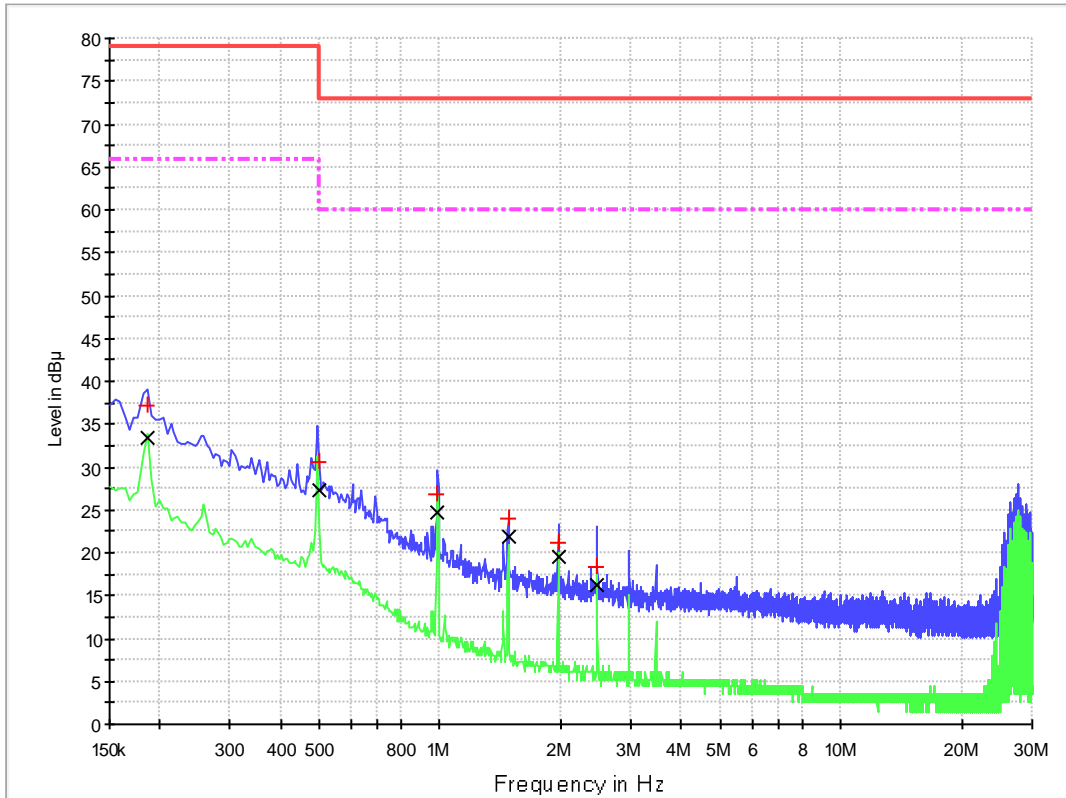

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.186000	37.1	1000.0	9.000	Off	10.0	41.9	79.0
0.498000	30.5	1000.0	9.000	Off	10.0	48.5	79.0
0.986000	26.8	1000.0	9.000	Off	10.0	46.2	73.0
1.482000	23.9	1000.0	9.000	Off	10.0	49.1	73.0
1.974000	21.1	1000.0	9.000	Off	10.0	51.9	73.0
2.466000	18.4	1000.0	9.000	Off	10.0	54.6	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.186000	33.4	1000.0	9.000	Off	10.0	32.6	66.0
0.498000	27.3	1000.0	9.000	Off	10.0	38.7	66.0
0.986000	24.7	1000.0	9.000	Off	10.0	35.3	60.0
1.482000	21.9	1000.0	9.000	Off	10.0	38.1	60.0
1.974000	19.4	1000.0	9.000	Off	10.0	40.6	60.0
2.466000	16.2	1000.0	9.000	Off	10.0	43.8	60.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode

Line Under Test: Line Positive (DC Output, charging mode, 230V~/50Hz)

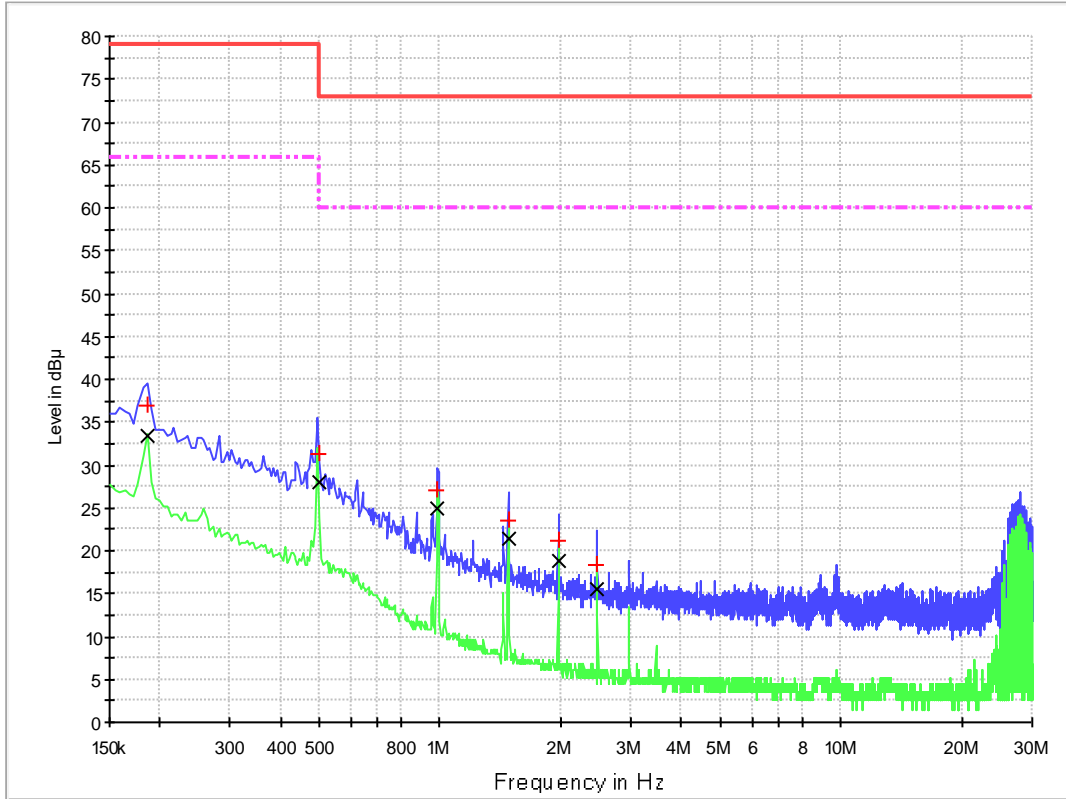

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.186000	36.9	1000.0	9.000	Off	10.0	42.1	79.0
0.498000	31.2	1000.0	9.000	Off	10.0	47.8	79.0
0.986000	27.0	1000.0	9.000	Off	10.0	46.0	73.0
1.482000	23.5	1000.0	9.000	Off	10.0	49.5	73.0
1.978000	21.1	1000.0	9.000	Off	10.0	51.9	73.0
2.474000	18.2	1000.0	9.000	Off	10.0	54.8	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.186000	33.3	1000.0	9.000	Off	10.0	32.7	66.0
0.498000	27.9	1000.0	9.000	Off	10.0	38.1	66.0
0.986000	24.8	1000.0	9.000	Off	10.0	35.2	60.0
1.482000	21.4	1000.0	9.000	Off	10.0	38.6	60.0
1.978000	18.7	1000.0	9.000	Off	10.0	41.3	60.0
2.474000	15.5	1000.0	9.000	Off	10.0	44.5	60.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode

Line Under Test: Line Negative (DC Output, charging mode, 230V~/50Hz)

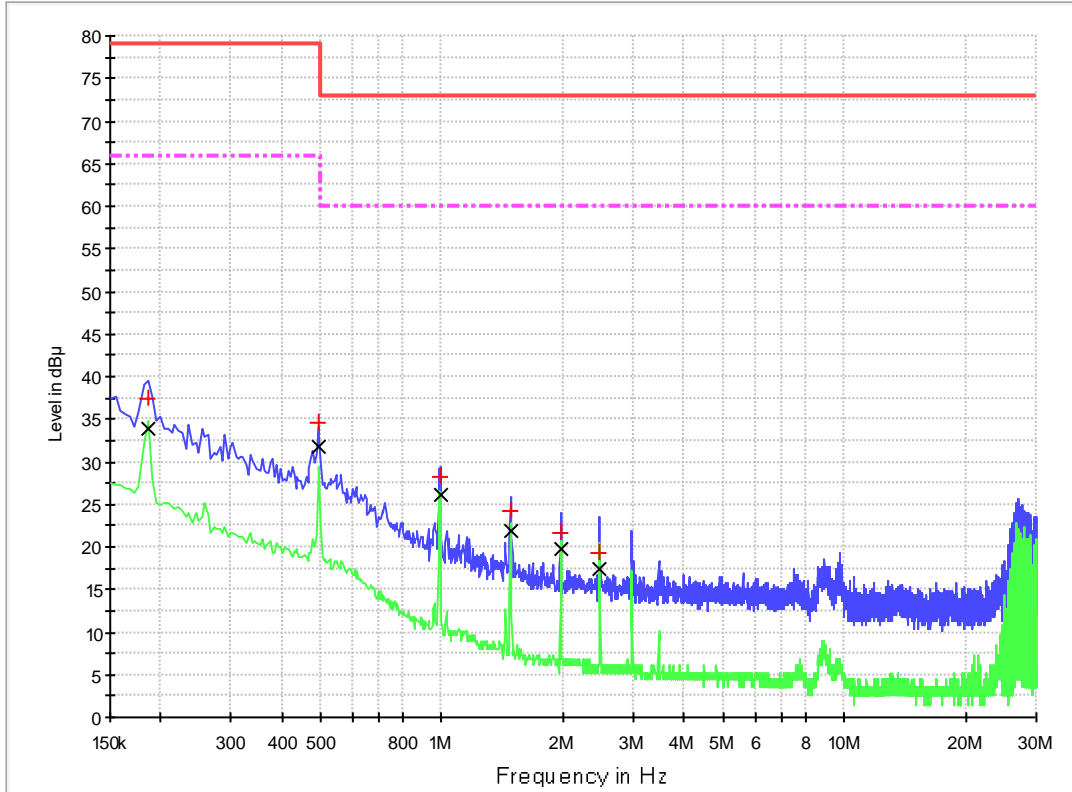

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.186000	37.4	1000.0	9.000	Off	10.0	41.6	79.0
0.494000	34.6	1000.0	9.000	Off	10.0	44.4	79.0
0.990000	28.3	1000.0	9.000	Off	10.0	44.7	73.0
1.482000	24.3	1000.0	9.000	Off	10.0	48.7	73.0
1.978000	21.7	1000.0	9.000	Off	10.0	51.3	73.0
2.474000	19.4	1000.0	9.000	Off	10.0	53.6	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.186000	33.9	1000.0	9.000	Off	10.0	32.1	66.0
0.494000	31.8	1000.0	9.000	Off	10.0	34.2	66.0
0.990000	26.0	1000.0	9.000	Off	10.0	34.0	60.0
1.482000	22.0	1000.0	9.000	Off	10.0	38.0	60.0
1.978000	19.7	1000.0	9.000	Off	10.0	40.3	60.0
2.474000	17.3	1000.0	9.000	Off	10.0	42.7	60.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode

Line Under Test: Line Positive (DC Output, running mode, 110V~/60Hz)

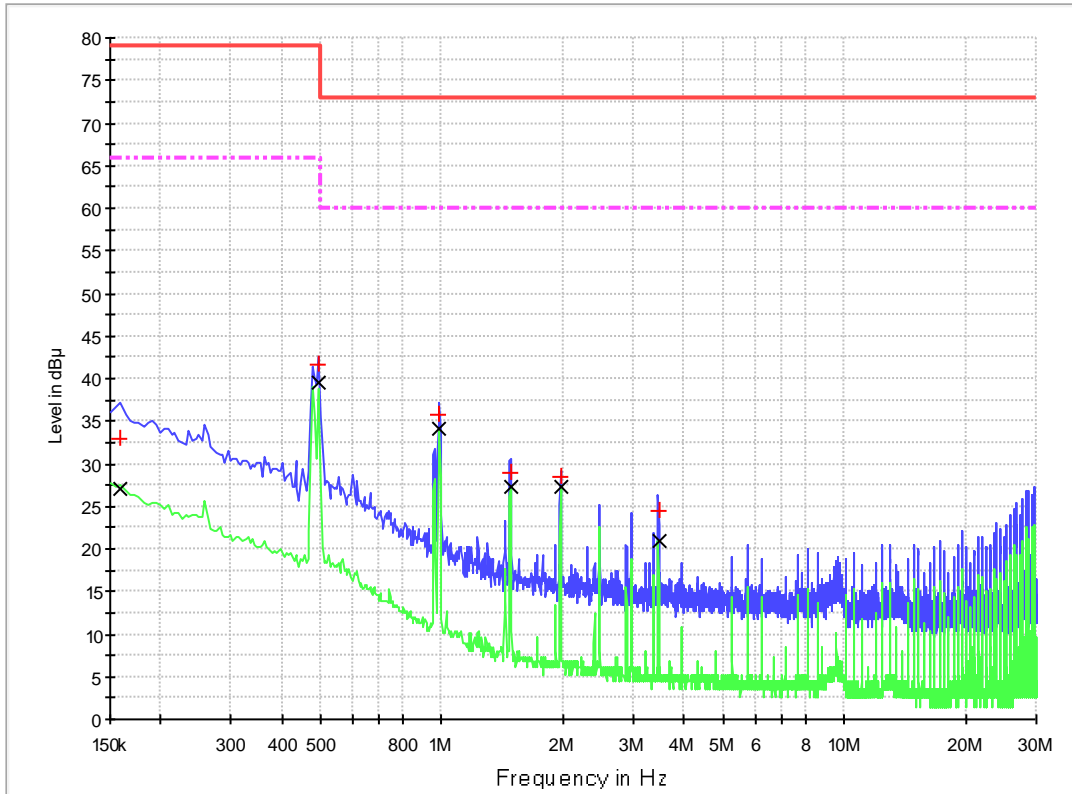

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.158000	32.9	1000.0	9.000	Off	10.0	46.1	79.0
0.494000	41.7	1000.0	9.000	Off	10.0	37.3	79.0
0.986000	35.7	1000.0	9.000	Off	10.0	37.3	73.0
1.482000	29.0	1000.0	9.000	Off	10.0	44.0	73.0
1.974000	28.5	1000.0	9.000	Off	10.0	44.5	73.0
3.454000	24.4	1000.0	9.000	Off	10.0	48.6	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.158000	27.0	1000.0	9.000	Off	10.0	39.0	66.0
0.494000	39.4	1000.0	9.000	Off	10.0	26.6	66.0
0.986000	34.1	1000.0	9.000	Off	10.0	25.9	60.0
1.482000	27.2	1000.0	9.000	Off	10.0	32.8	60.0
1.974000	27.4	1000.0	9.000	Off	10.0	32.6	60.0
3.454000	20.9	1000.0	9.000	Off	10.0	39.1	60.0

For adaptor: adapter 1_FY2401500S1, Wi-Fi mode

Line Under Test: Line Negative (DC Output, running mode, 110V~/60Hz)

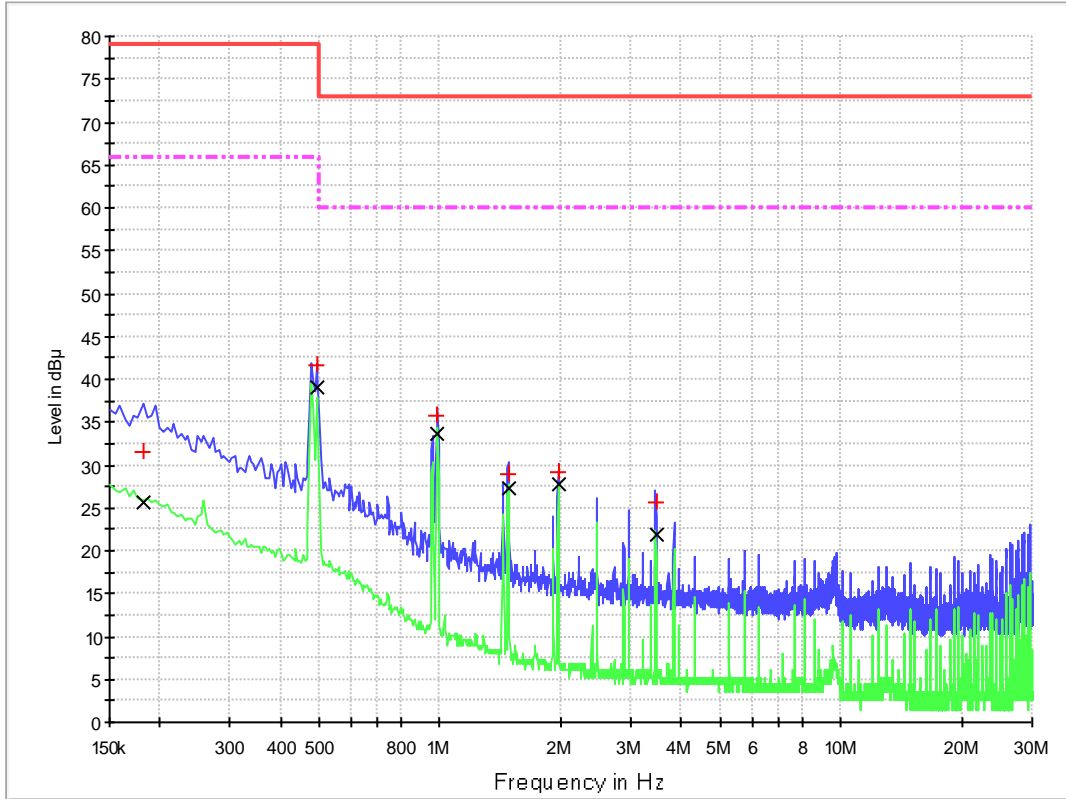

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.182000	31.6	1000.0	9.000	Off	10.0	47.4	79.0
0.494000	41.5	1000.0	9.000	Off	10.0	37.5	79.0
0.986000	35.7	1000.0	9.000	Off	10.0	37.3	73.0
1.482000	29.0	1000.0	9.000	Off	10.0	44.0	73.0
1.974000	29.1	1000.0	9.000	Off	10.0	43.9	73.0
3.454000	25.6	1000.0	9.000	Off	10.0	47.4	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.182000	25.7	1000.0	9.000	Off	10.0	40.3	66.0
0.494000	39.0	1000.0	9.000	Off	10.0	27.0	66.0
0.986000	33.7	1000.0	9.000	Off	10.0	26.3	60.0
1.482000	27.4	1000.0	9.000	Off	10.0	32.6	60.0
1.974000	27.8	1000.0	9.000	Off	10.0	32.2	60.0
3.454000	21.9	1000.0	9.000	Off	10.0	38.1	60.0

For adaptor: adapter 1_FY2401500S1 , Wi-Fi mode

Line Under Test: Line Positive (DC Output, running mode, 230V~/50Hz)

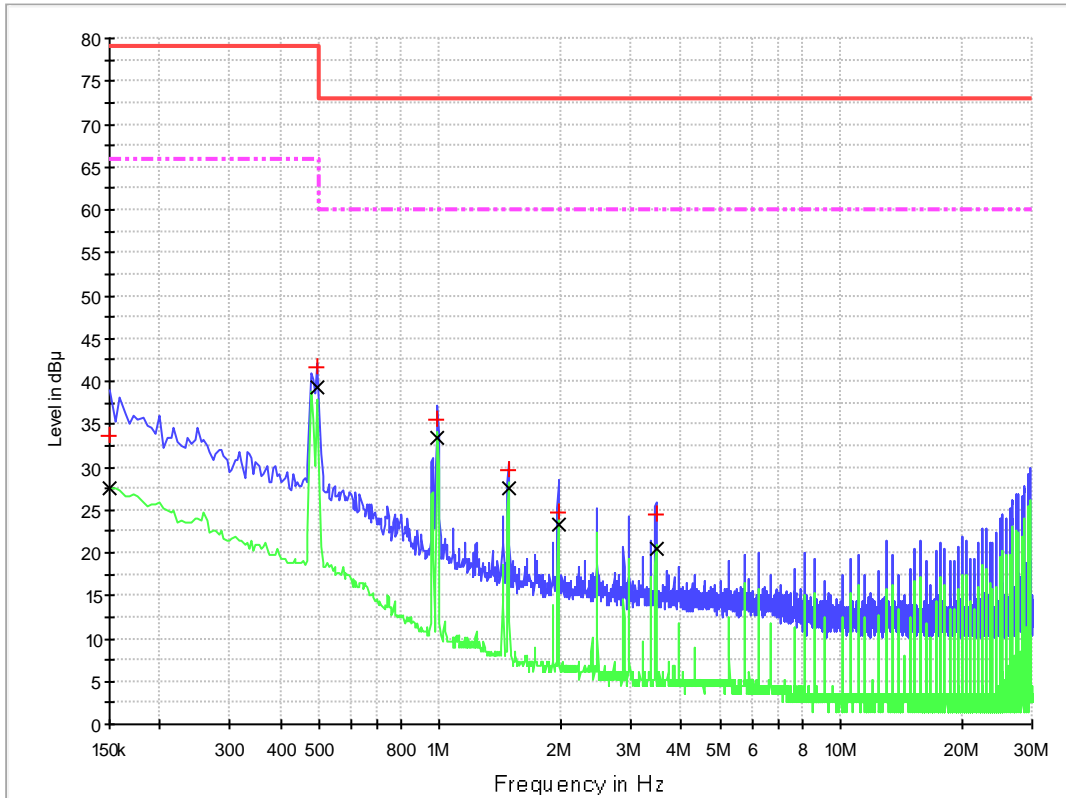

QP


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	33.5	1000.0	9.000	Off	10.0	45.5	79.0
0.494000	41.6	1000.0	9.000	Off	10.0	37.4	79.0
0.986000	35.5	1000.0	9.000	Off	10.0	37.5	73.0
1.482000	29.6	1000.0	9.000	Off	10.0	43.4	73.0
1.978000	24.7	1000.0	9.000	Off	10.0	48.3	73.0
3.454000	24.4	1000.0	9.000	Off	10.0	48.6	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	27.6	1000.0	9.000	Off	10.0	38.4	66.0
0.494000	39.3	1000.0	9.000	Off	10.0	26.7	66.0
0.986000	33.5	1000.0	9.000	Off	10.0	26.5	60.0
1.482000	27.6	1000.0	9.000	Off	10.0	32.4	60.0
1.978000	23.2	1000.0	9.000	Off	10.0	36.8	60.0
3.454000	20.4	1000.0	9.000	Off	10.0	39.6	60.0

For adaptor: adapter 1_FY2401500S1 , Wi-Fi mode

Line Under Test: Line Negative (DC Output, running mode, 230V~/50Hz)

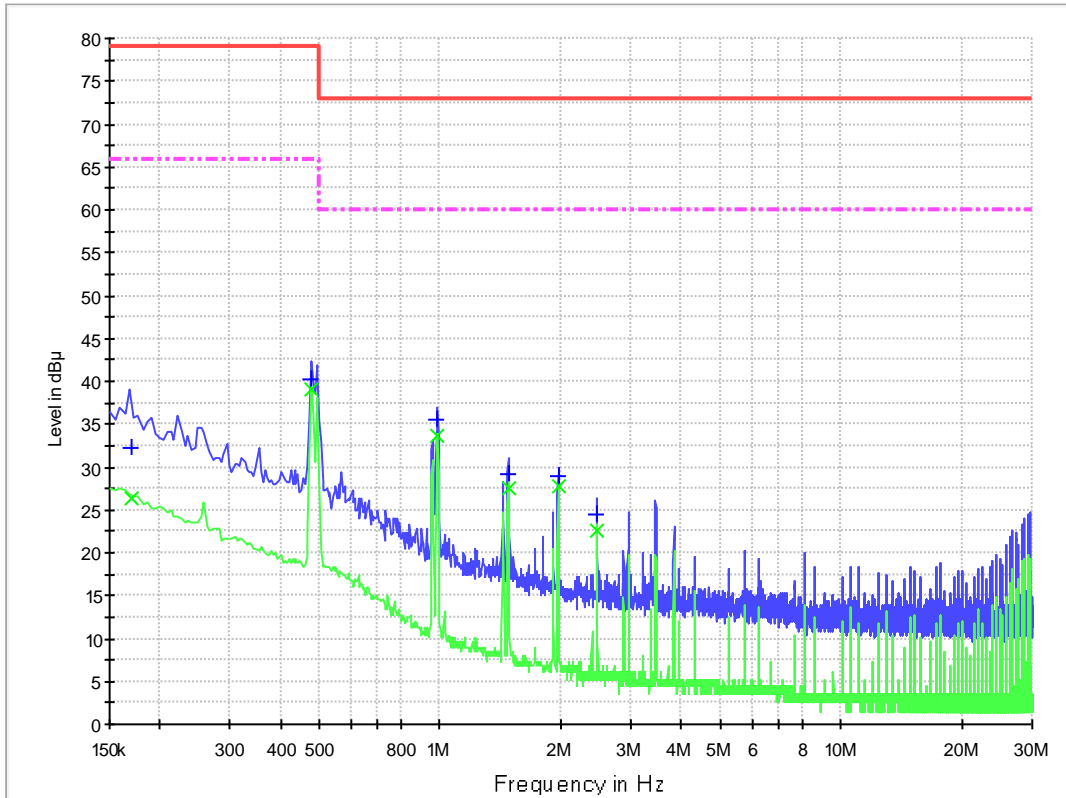


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.170000	32.3	1000.0	9.000	Off	10.0	46.7	79.0
0.478000	40.2	1000.0	9.000	Off	10.0	38.8	79.0
0.986000	35.5	1000.0	9.000	Off	10.0	37.5	73.0
1.482000	29.2	1000.0	9.000	Off	10.0	43.8	73.0
1.974000	28.9	1000.0	9.000	Off	10.0	44.1	73.0
2.466000	24.4	1000.0	9.000	Off	10.0	48.6	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.170000	26.3	1000.0	9.000	Off	10.0	39.8	66.0
0.478000	39.2	1000.0	9.000	Off	10.0	26.8	66.0
0.986000	33.6	1000.0	9.000	Off	10.0	26.4	60.0
1.482000	27.6	1000.0	9.000	Off	10.0	32.4	60.0
1.974000	27.7	1000.0	9.000	Off	10.0	32.3	60.0
2.466000	22.7	1000.0	9.000	Off	10.0	37.3	60.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line L (110V~/60Hz, Charging mode)

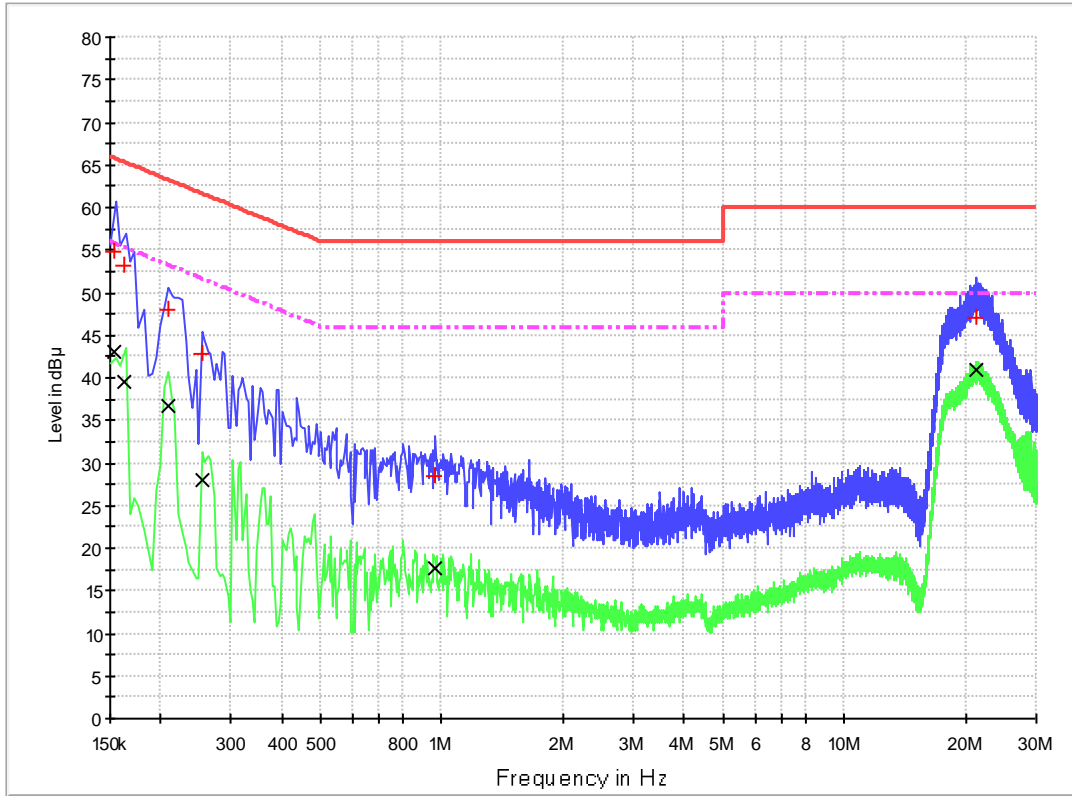


QP

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)
0.154000	54.8	1000.0	9.000	Off	L1	10.0	11.0	65.8
0.162000	53.1	1000.0	9.000	Off	L1	10.0	12.3	65.4
0.210000	48.0	1000.0	9.000	Off	L1	10.0	15.3	63.2
0.254000	42.9	1000.0	9.000	Off	L1	10.0	18.7	61.6
0.966000	28.6	1000.0	9.000	Off	L1	10.0	27.4	56.0
21.230000	47.0	1000.0	9.000	Off	L1	10.0	13.0	60.0

AV

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dB μ V)
0.154000	43.1	1000.0	9.000	Off	L1	10.0	12.7	55.8
0.162000	39.5	1000.0	9.000	Off	L1	10.0	15.8	55.4
0.210000	36.6	1000.0	9.000	Off	L1	10.0	16.6	53.2
0.254000	27.9	1000.0	9.000	Off	L1	10.0	23.7	51.6
0.966000	17.6	1000.0	9.000	Off	L1	10.0	28.4	46.0
21.230000	40.9	1000.0	9.000	Off	L1	10.0	9.1	50.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line N (110V~/60Hz, Charging mode)

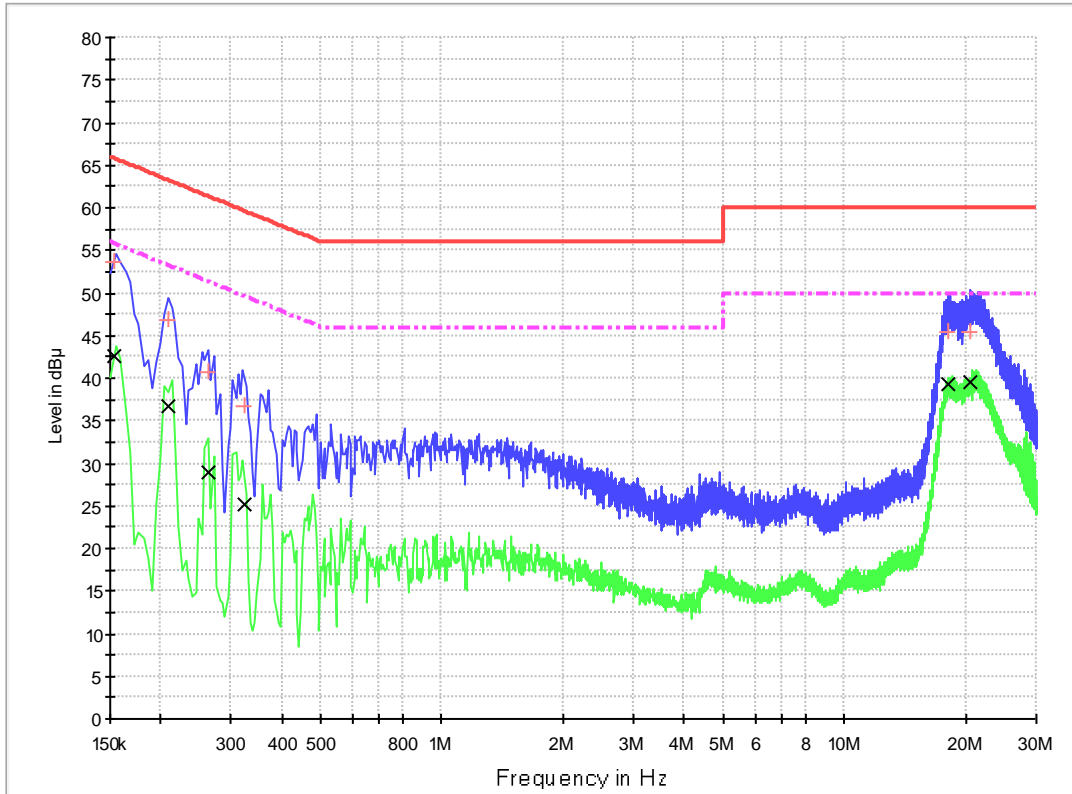


QP

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)
0.154000	53.7	1000.0	9.000	Off	N	10.0	12.1	65.8
0.210000	46.9	1000.0	9.000	Off	N	10.0	16.3	63.2
0.262000	40.7	1000.0	9.000	Off	N	10.0	20.7	61.4
0.322000	36.7	1000.0	9.000	Off	N	10.0	23.0	59.7
18.210000	45.5	1000.0	9.000	Off	N	10.0	14.5	60.0
20.606000	45.4	1000.0	9.000	Off	N	10.0	14.6	60.0

AV

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dB μ V)
0.154000	42.6	1000.0	9.000	Off	N	10.0	13.2	55.8
0.210000	36.8	1000.0	9.000	Off	N	10.0	16.4	53.2
0.262000	28.9	1000.0	9.000	Off	N	10.0	22.5	51.4
0.322000	25.2	1000.0	9.000	Off	N	10.0	24.4	49.7
18.210000	39.3	1000.0	9.000	Off	N	10.0	10.7	50.0
20.606000	39.4	1000.0	9.000	Off	N	10.0	10.6	50.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line L (230V~/50Hz, Charging mode)

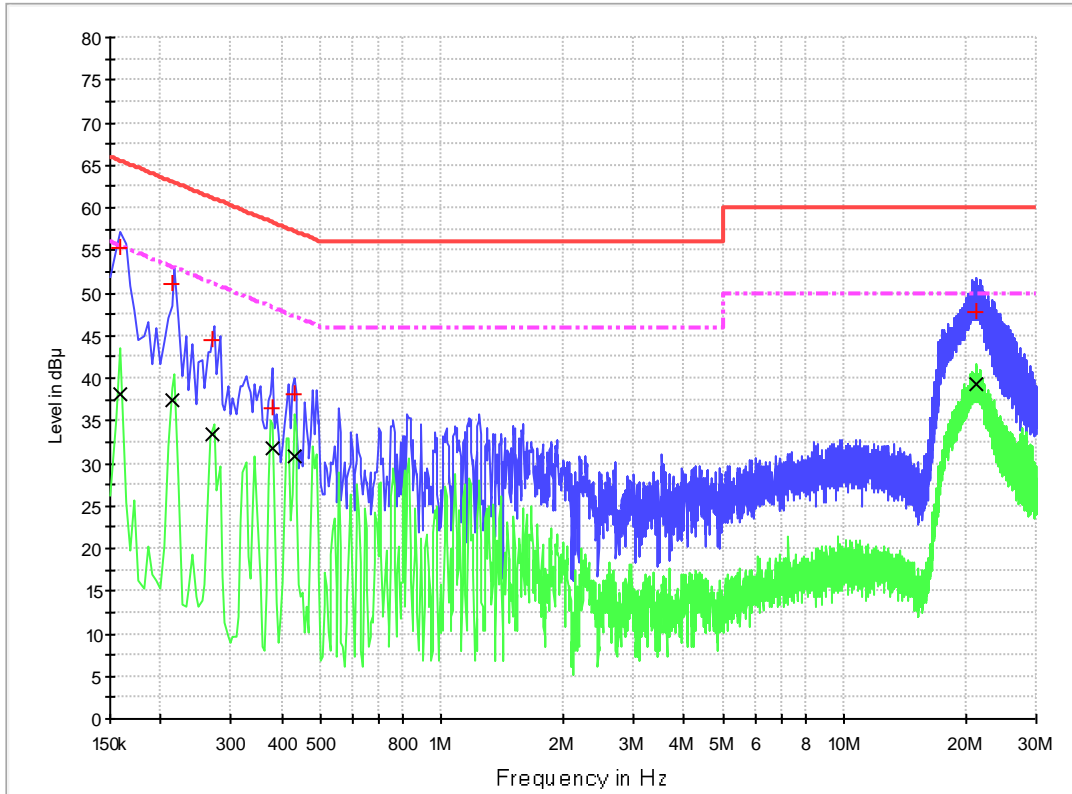


QP

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)
0.158000	55.3	1000.0	9.000	Off	L1	10.0	10.3	65.6
0.214000	51.1	1000.0	9.000	Off	L1	10.0	11.9	63.0
0.270000	44.4	1000.0	9.000	Off	L1	10.0	16.7	61.1
0.378000	36.5	1000.0	9.000	Off	L1	10.0	21.9	58.3
0.430000	38.1	1000.0	9.000	Off	L1	10.0	19.2	57.3
21.354000	47.7	1000.0	9.000	Off	L1	10.0	12.3	60.0

AV

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dB μ V)
0.158000	38.0	1000.0	9.000	Off	L1	10.0	17.5	55.6
0.214000	37.3	1000.0	9.000	Off	L1	10.0	15.7	53.0
0.270000	33.5	1000.0	9.000	Off	L1	10.0	17.7	51.1
0.378000	31.8	1000.0	9.000	Off	L1	10.0	16.5	48.3
0.430000	30.9	1000.0	9.000	Off	L1	10.0	16.3	47.3
21.354000	39.2	1000.0	9.000	Off	L1	10.0	10.8	50.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line N (230V~/50Hz, Charging mode)

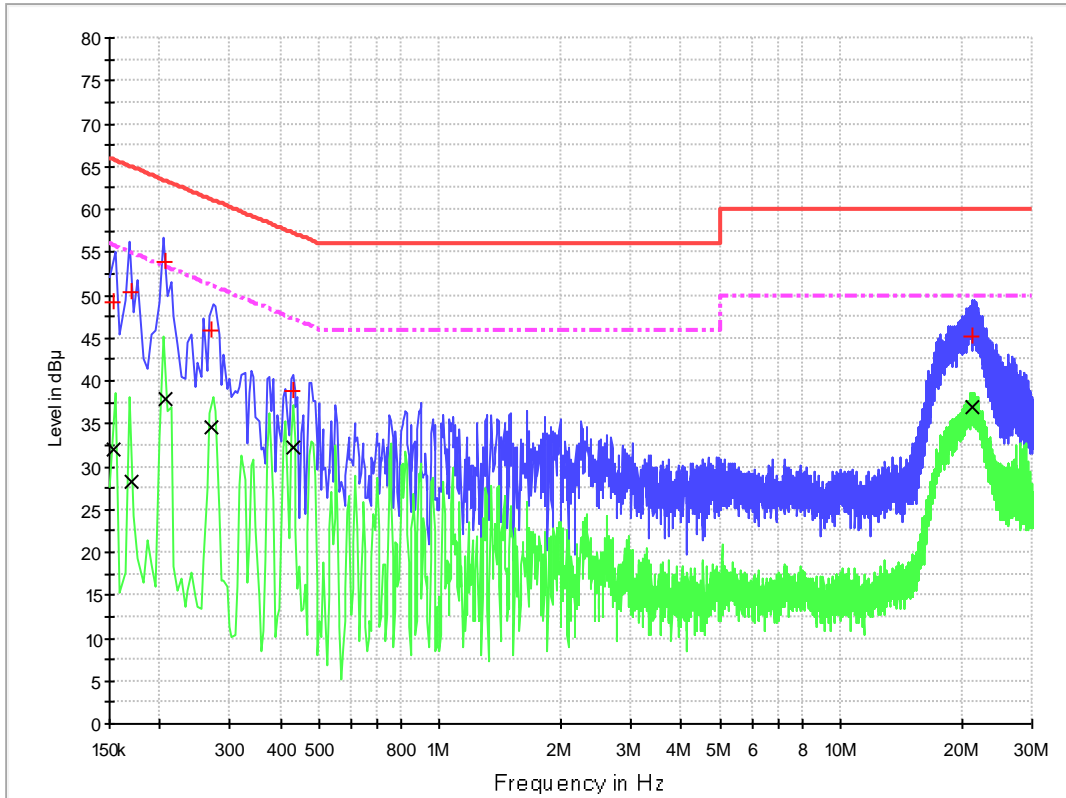


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.154000	49.3	1000.0	9.000	Off	N	10.0	16.5	65.8
0.170000	50.3	1000.0	9.000	Off	N	10.0	14.7	65.0
0.206000	53.8	1000.0	9.000	Off	N	10.0	9.6	63.4
0.270000	45.9	1000.0	9.000	Off	N	10.0	15.2	61.1
0.430000	38.8	1000.0	9.000	Off	N	10.0	18.5	57.3
21.306000	45.1	1000.0	9.000	Off	N	10.0	14.9	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.154000	31.9	1000.0	9.000	Off	N	10.0	23.9	55.8
0.170000	28.2	1000.0	9.000	Off	N	10.0	26.8	55.0
0.206000	37.8	1000.0	9.000	Off	N	10.0	15.6	53.4
0.270000	34.5	1000.0	9.000	Off	N	10.0	16.6	51.1
0.430000	32.3	1000.0	9.000	Off	N	10.0	14.9	47.3
21.306000	36.9	1000.0	9.000	Off	N	10.0	13.1	50.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line L (110V~/60Hz, Running mode)

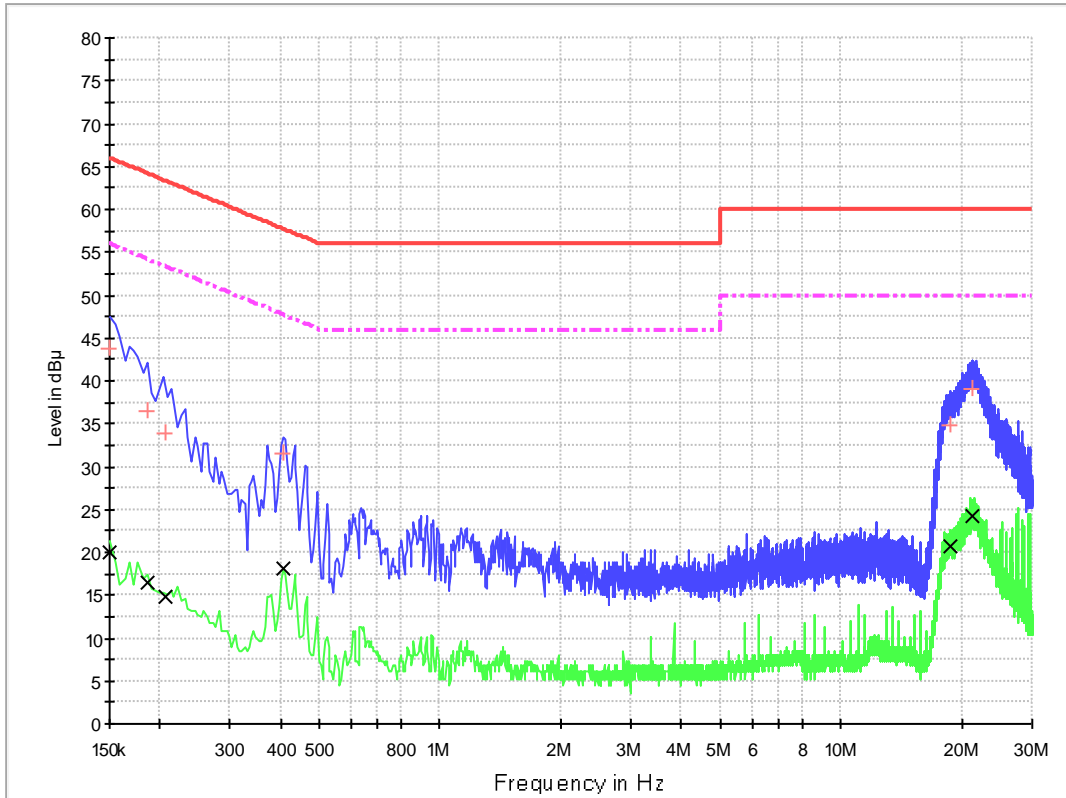


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	43.7	1000.0	9.000	Off	L1	10.0	22.3	66.0
0.186000	36.5	1000.0	9.000	Off	L1	10.0	27.7	64.2
0.206000	33.9	1000.0	9.000	Off	L1	10.0	29.5	63.4
0.406000	31.5	1000.0	9.000	Off	L1	10.0	26.3	57.7
18.658000	34.9	1000.0	9.000	Off	L1	10.0	25.1	60.0
21.230000	39.1	1000.0	9.000	Off	L1	10.0	20.9	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	20.0	1000.0	9.000	Off	L1	10.0	36.0	56.0
0.186000	16.4	1000.0	9.000	Off	L1	10.0	37.8	54.2
0.206000	14.8	1000.0	9.000	Off	L1	10.0	38.6	53.4
0.406000	18.2	1000.0	9.000	Off	L1	10.0	29.5	47.7
18.658000	20.8	1000.0	9.000	Off	L1	10.0	29.2	50.0
21.230000	24.3	1000.0	9.000	Off	L1	10.0	25.8	50.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line N (110V~/60Hz, Running mode)

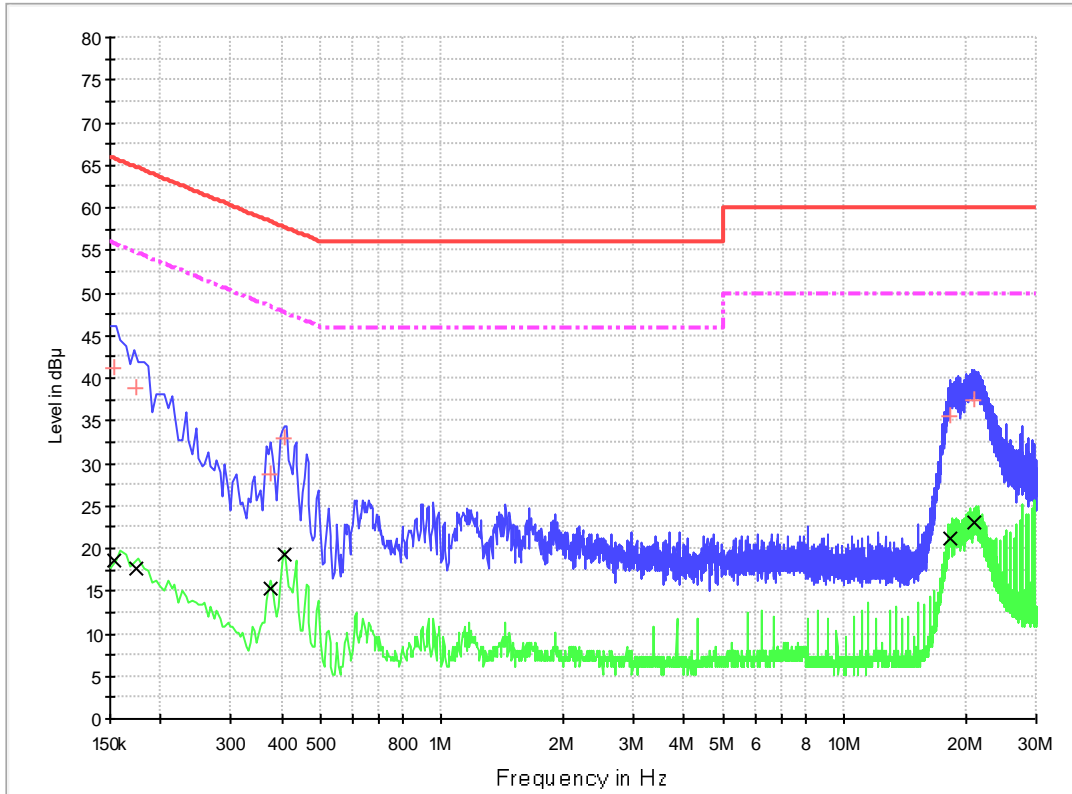


QP

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)
0.154000	41.2	1000.0	9.000	Off	N	10.0	24.5	65.8
0.174000	38.9	1000.0	9.000	Off	N	10.0	25.9	64.8
0.374000	28.8	1000.0	9.000	Off	N	10.0	29.6	58.4
0.406000	32.8	1000.0	9.000	Off	N	10.0	24.9	57.7
18.394000	35.5	1000.0	9.000	Off	N	10.0	24.5	60.0
21.130000	37.5	1000.0	9.000	Off	N	10.0	22.5	60.0

AV

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dB μ V)
0.154000	18.7	1000.0	9.000	Off	N	10.0	37.1	55.8
0.174000	17.8	1000.0	9.000	Off	N	10.0	37.0	54.8
0.374000	15.4	1000.0	9.000	Off	N	10.0	33.0	48.4
0.406000	19.2	1000.0	9.000	Off	N	10.0	28.5	47.7
18.394000	21.2	1000.0	9.000	Off	N	10.0	28.8	50.0
21.130000	23.0	1000.0	9.000	Off	N	10.0	27.0	50.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line L (230V~/50Hz, Running mode)

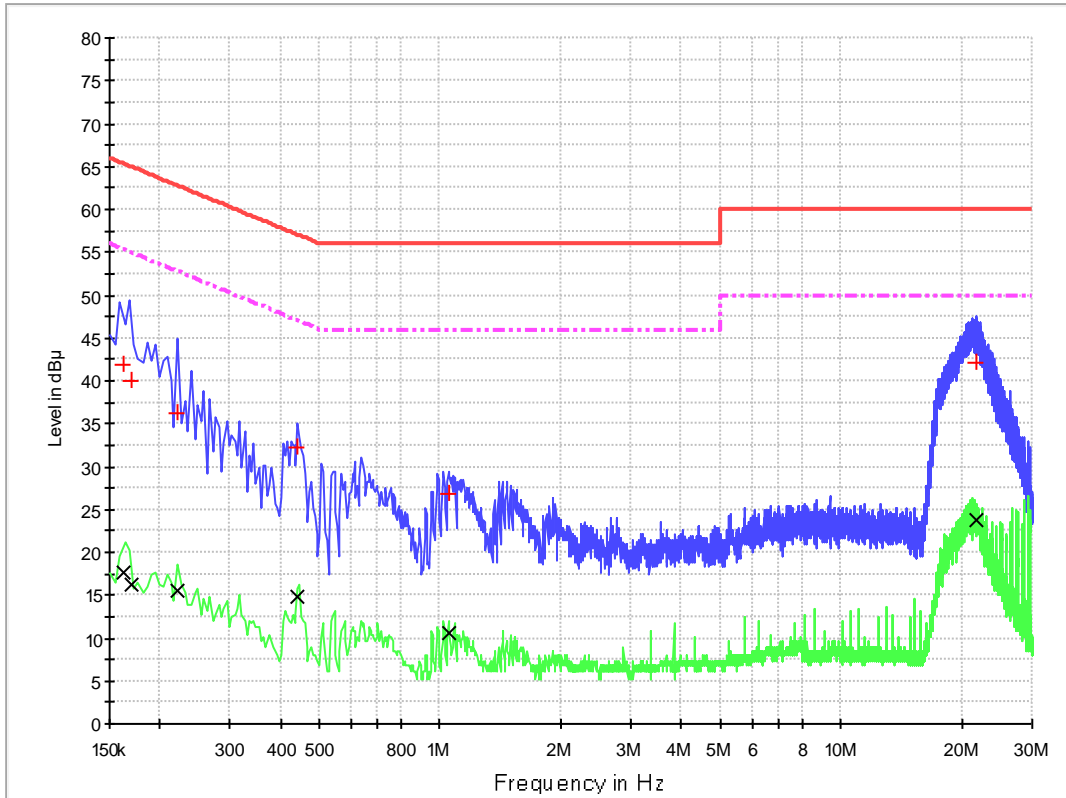


QP

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)
0.162000	41.8	1000.0	9.000	Off	L1	10.0	23.6	65.4
0.170000	40.0	1000.0	9.000	Off	L1	10.0	24.9	65.0
0.222000	36.2	1000.0	9.000	Off	L1	10.0	26.6	62.7
0.442000	32.1	1000.0	9.000	Off	L1	10.0	24.9	57.0
1.050000	26.7	1000.0	9.000	Off	L1	10.0	29.3	56.0
21.722000	42.1	1000.0	9.000	Off	L1	10.0	17.9	60.0

AV

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dB μ V)
0.162000	17.6	1000.0	9.000	Off	L1	10.0	37.7	55.4
0.170000	16.2	1000.0	9.000	Off	L1	10.0	38.7	55.0
0.222000	15.6	1000.0	9.000	Off	L1	10.0	37.1	52.7
0.442000	14.7	1000.0	9.000	Off	L1	10.0	32.3	47.0
1.050000	10.6	1000.0	9.000	Off	L1	10.0	35.4	46.0
21.722000	23.7	1000.0	9.000	Off	L1	10.0	26.3	50.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line Negative (230V~/50Hz, Running mode)

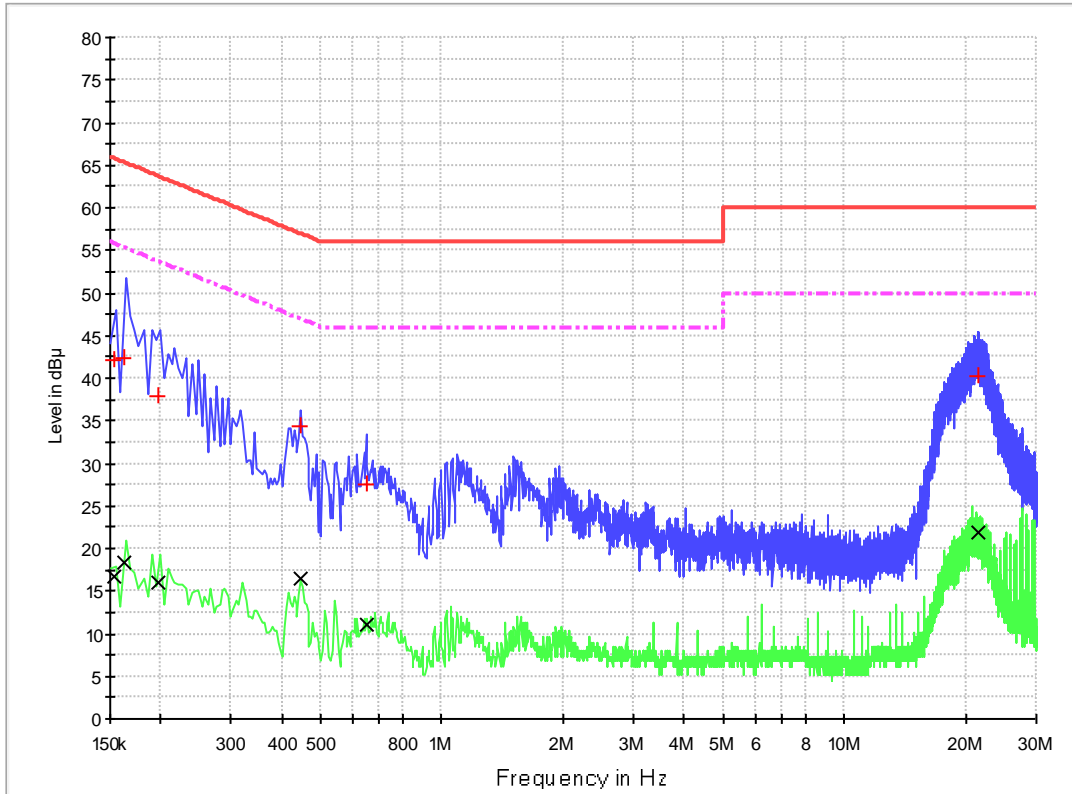


QP

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV)
0.154000	42.2	1000.0	9.000	Off	N	10.0	23.6	65.8
0.162000	42.3	1000.0	9.000	Off	N	10.0	23.1	65.4
0.198000	37.8	1000.0	9.000	Off	N	10.0	25.9	63.7
0.446000	34.3	1000.0	9.000	Off	N	10.0	22.7	56.9
0.650000	27.6	1000.0	9.000	Off	N	10.0	28.4	56.0
21.394000	40.1	1000.0	9.000	Off	N	10.0	19.9	60.0

AV

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBμV)
0.154000	16.7	1000.0	9.000	Off	N	10.0	39.1	55.8
0.162000	18.4	1000.0	9.000	Off	N	10.0	37.0	55.4
0.198000	15.9	1000.0	9.000	Off	N	10.0	37.8	53.7
0.446000	16.6	1000.0	9.000	Off	N	10.0	30.4	46.9
0.650000	11.0	1000.0	9.000	Off	N	10.0	35.0	46.0
21.394000	21.9	1000.0	9.000	Off	N	10.0	28.1	50.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line Positive (DC input, 110V~/60Hz, Charging mode)

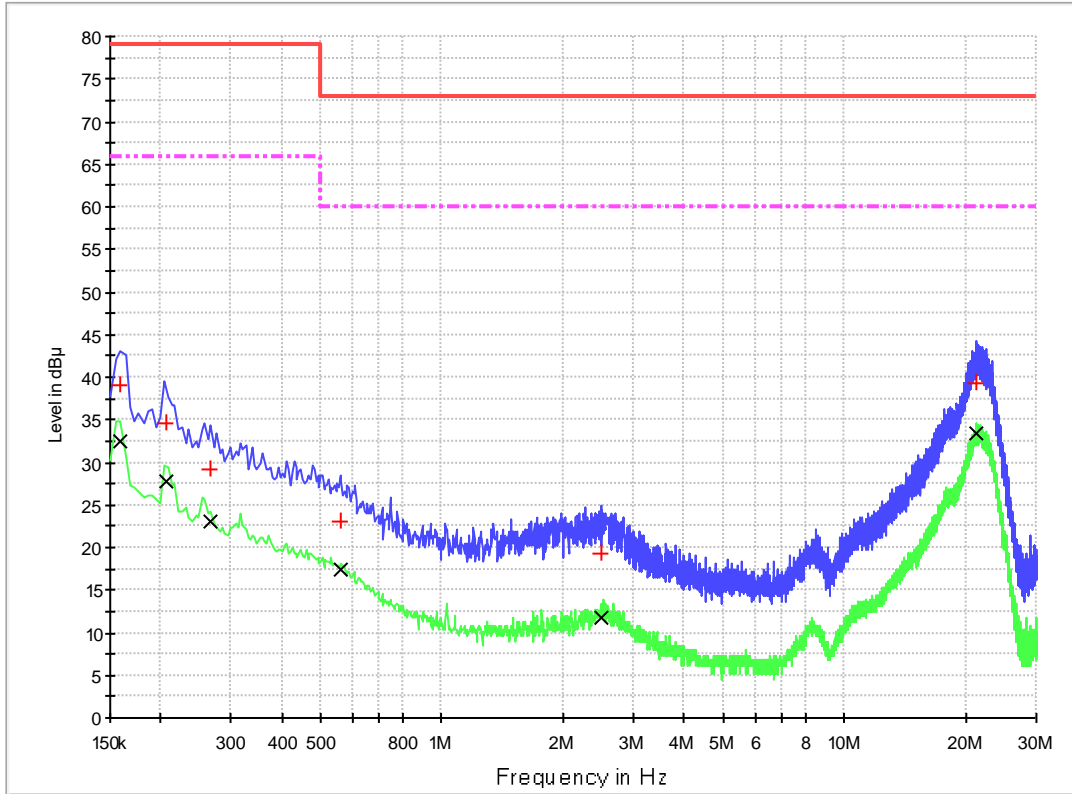


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.158000	39.0	1000.0	9.000	Off	10.0	40.0	79.0
0.206000	34.6	1000.0	9.000	Off	10.0	44.4	79.0
0.266000	29.2	1000.0	9.000	Off	10.0	49.8	79.0
0.558000	23.0	1000.0	9.000	Off	10.0	50.0	73.0
2.482000	19.2	1000.0	9.000	Off	10.0	53.8	73.0
21.318000	39.3	1000.0	9.000	Off	10.0	33.7	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.158000	32.4	1000.0	9.000	Off	10.0	33.6	66.0
0.206000	27.8	1000.0	9.000	Off	10.0	38.2	66.0
0.266000	23.0	1000.0	9.000	Off	10.0	43.0	66.0
0.558000	17.3	1000.0	9.000	Off	10.0	42.7	60.0
2.482000	11.8	1000.0	9.000	Off	10.0	48.2	60.0
21.318000	33.3	1000.0	9.000	Off	10.0	26.7	60.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line Negative (DC input, 110V~/60Hz, Charging mode)

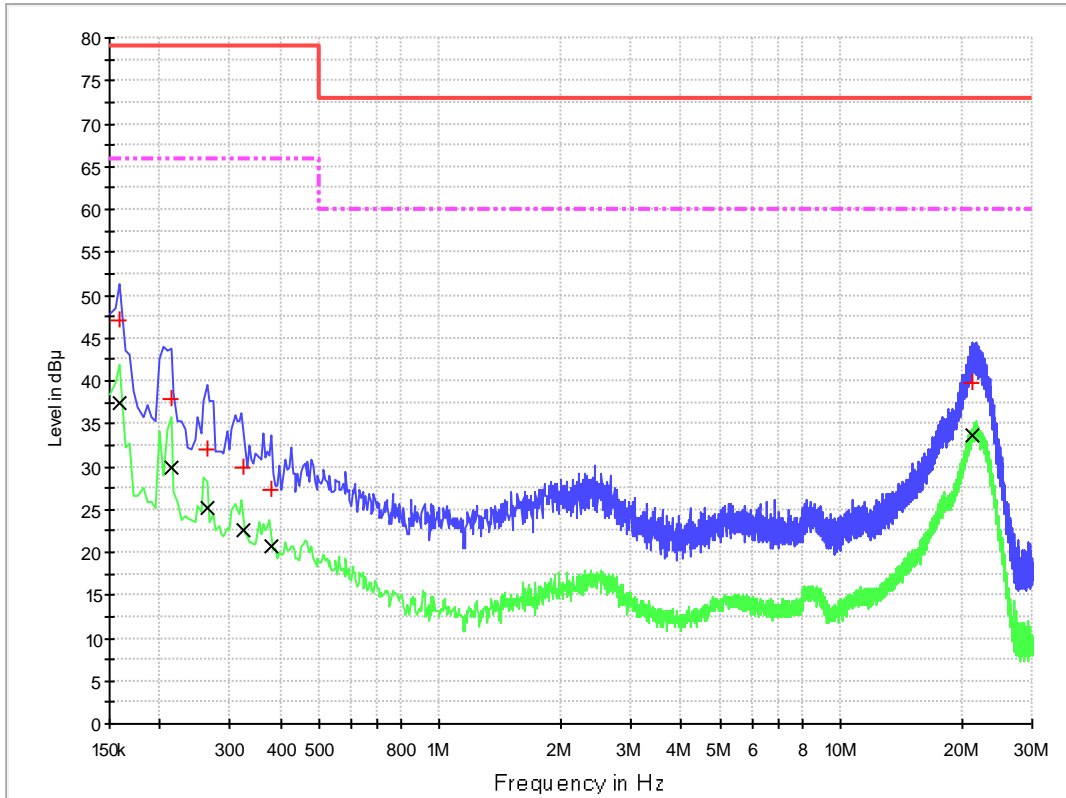


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.158000	47.1	1000.0	9.000	Off	10.0	31.9	79.0
0.214000	37.8	1000.0	9.000	Off	10.0	41.2	79.0
0.262000	32.0	1000.0	9.000	Off	10.0	47.0	79.0
0.322000	29.8	1000.0	9.000	Off	10.0	49.2	79.0
0.378000	27.2	1000.0	9.000	Off	10.0	51.8	79.0
21.338000	39.7	1000.0	9.000	Off	10.0	33.3	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.158000	37.5	1000.0	9.000	Off	10.0	28.5	66.0
0.214000	29.8	1000.0	9.000	Off	10.0	36.2	66.0
0.262000	25.2	1000.0	9.000	Off	10.0	40.8	66.0
0.322000	22.6	1000.0	9.000	Off	10.0	43.4	66.0
0.378000	20.7	1000.0	9.000	Off	10.0	45.3	66.0
21.338000	33.7	1000.0	9.000	Off	10.0	26.3	60.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line Positive (DC input, 230V~/50Hz, Charging mode)

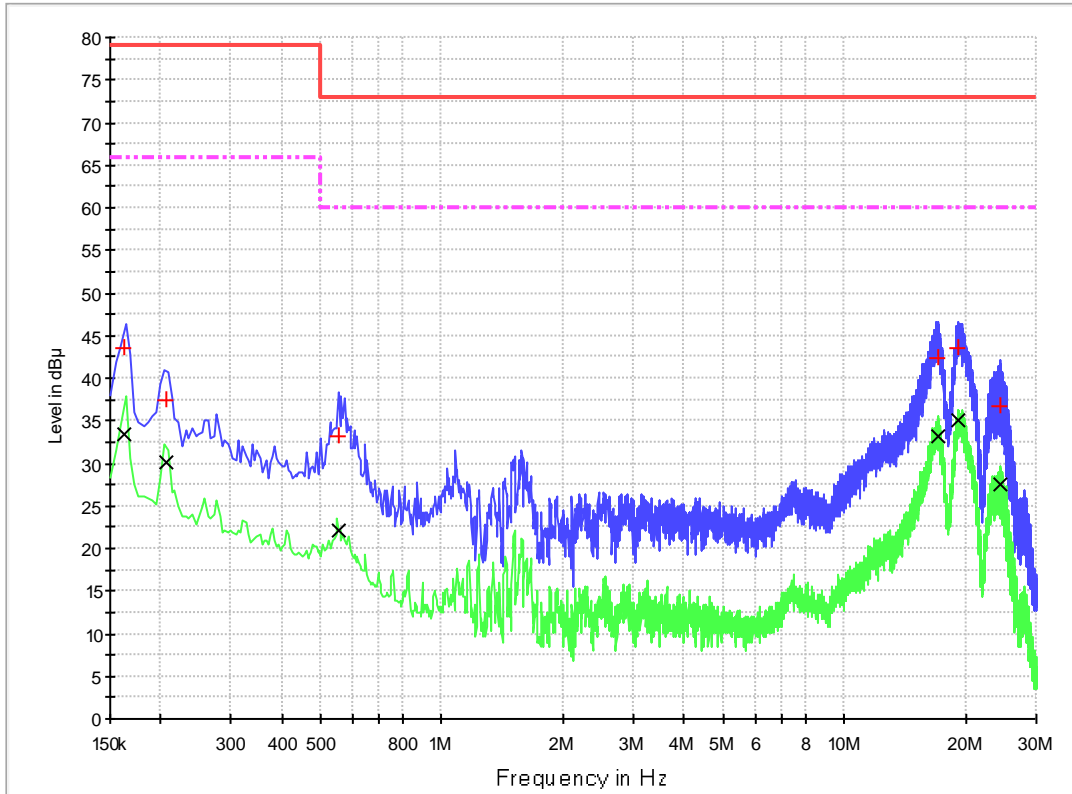


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.162000	43.5	1000.0	9.000	Off	10.0	35.5	79.0
0.206000	37.4	1000.0	9.000	Off	10.0	41.6	79.0
0.554000	33.1	1000.0	9.000	Off	10.0	39.9	73.0
17.166000	42.3	1000.0	9.000	Off	10.0	30.7	73.0
19.202000	43.4	1000.0	9.000	Off	10.0	29.6	73.0
24.282000	36.8	1000.0	9.000	Off	10.0	36.2	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.162000	33.3	1000.0	9.000	Off	10.0	32.7	66.0
0.206000	30.1	1000.0	9.000	Off	10.0	35.9	66.0
0.554000	22.2	1000.0	9.000	Off	10.0	37.8	60.0
17.166000	33.2	1000.0	9.000	Off	10.0	26.8	60.0
19.202000	35.0	1000.0	9.000	Off	10.0	25.0	60.0
24.282000	27.6	1000.0	9.000	Off	10.0	32.4	60.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line Negative (DC input, 230V~/50Hz, Charging mode)

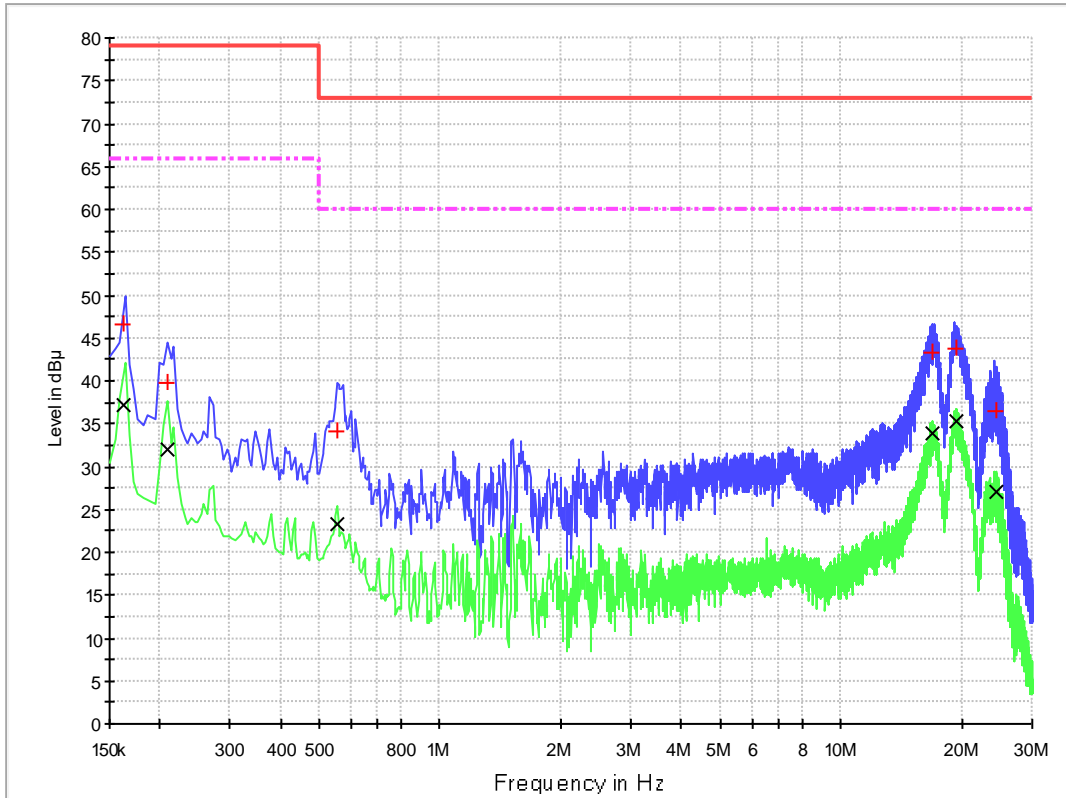


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.162000	46.7	1000.0	9.000	Off	10.0	32.3	79.0
0.210000	39.7	1000.0	9.000	Off	10.0	39.3	79.0
0.554000	34.1	1000.0	9.000	Off	10.0	38.9	73.0
16.986000	43.2	1000.0	9.000	Off	10.0	29.8	73.0
19.322000	43.8	1000.0	9.000	Off	10.0	29.2	73.0
24.494000	36.4	1000.0	9.000	Off	10.0	36.6	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.162000	37.1	1000.0	9.000	Off	10.0	28.9	66.0
0.210000	31.9	1000.0	9.000	Off	10.0	34.1	66.0
0.554000	23.3	1000.0	9.000	Off	10.0	36.7	60.0
16.986000	33.8	1000.0	9.000	Off	10.0	26.2	60.0
19.322000	35.2	1000.0	9.000	Off	10.0	24.8	60.0
24.494000	27.0	1000.0	9.000	Off	10.0	33.0	60.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line Positive (DC input, 110V~/60Hz, Running mode)

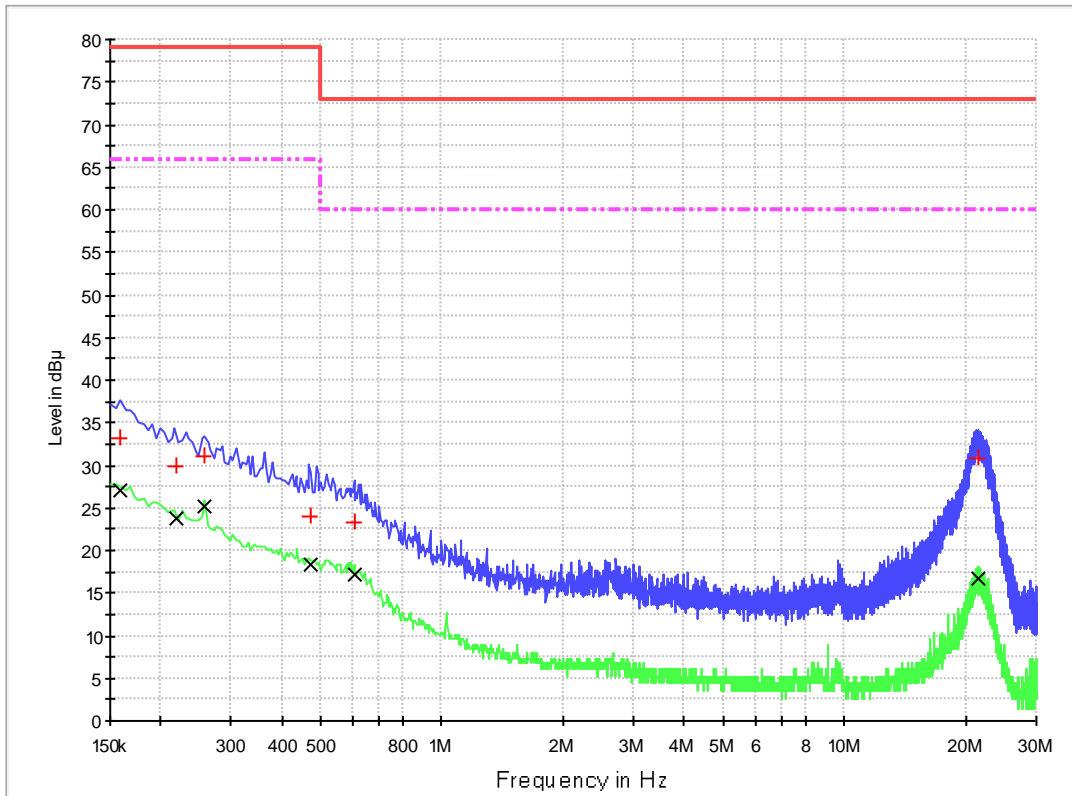


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.158000	33.1	1000.0	9.000	Off	10.0	45.9	79.0
0.218000	29.9	1000.0	9.000	Off	10.0	49.1	79.0
0.258000	31.0	1000.0	9.000	Off	10.0	48.0	79.0
0.470000	23.9	1000.0	9.000	Off	10.0	55.1	79.0
0.606000	23.2	1000.0	9.000	Off	10.0	49.8	73.0
21.482000	30.9	1000.0	9.000	Off	10.0	42.1	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.158000	27.1	1000.0	9.000	Off	10.0	38.9	66.0
0.218000	23.8	1000.0	9.000	Off	10.0	42.2	66.0
0.258000	25.2	1000.0	9.000	Off	10.0	40.8	66.0
0.470000	18.4	1000.0	9.000	Off	10.0	47.6	66.0
0.606000	17.2	1000.0	9.000	Off	10.0	42.8	60.0
21.482000	16.7	1000.0	9.000	Off	10.0	43.3	60.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line Negative (DC input, 110V~/60Hz, Running mode)

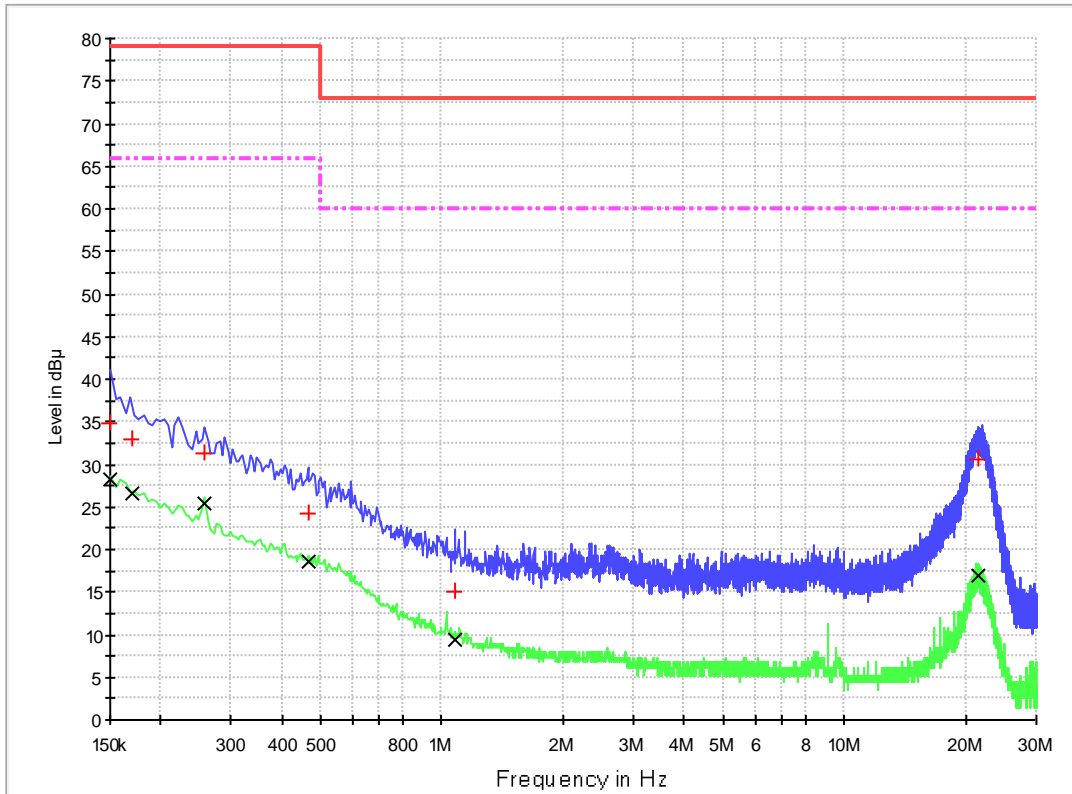


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	34.9	1000.0	9.000	Off	10.0	44.1	79.0
0.170000	33.0	1000.0	9.000	Off	10.0	46.0	79.0
0.258000	31.2	1000.0	9.000	Off	10.0	47.8	79.0
0.466000	24.3	1000.0	9.000	Off	10.0	54.7	79.0
1.078000	15.1	1000.0	9.000	Off	10.0	57.9	73.0
21.558000	30.7	1000.0	9.000	Off	10.0	42.3	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	28.1	1000.0	9.000	Off	10.0	37.9	66.0
0.170000	26.6	1000.0	9.000	Off	10.0	39.4	66.0
0.258000	25.5	1000.0	9.000	Off	10.0	40.6	66.0
0.466000	18.6	1000.0	9.000	Off	10.0	47.4	66.0
1.078000	9.5	1000.0	9.000	Off	10.0	50.5	60.0
21.558000	16.9	1000.0	9.000	Off	10.0	43.1	60.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line Positive (DC input, 230V~/50Hz, Running mode)

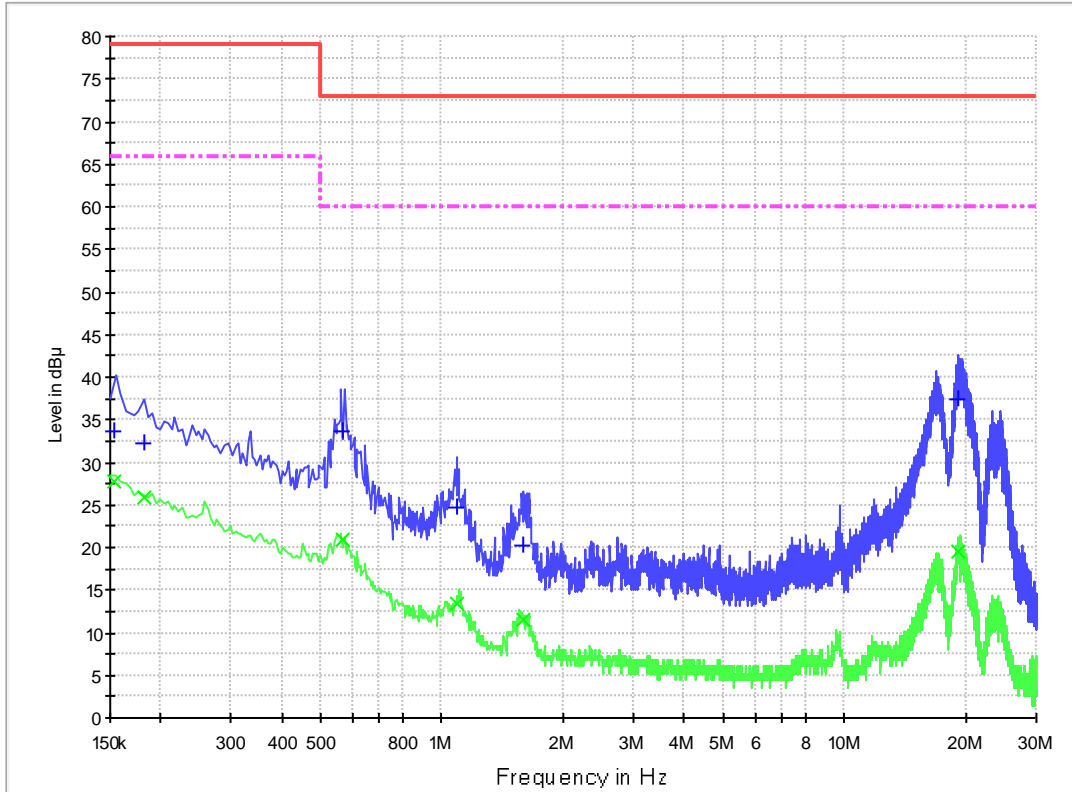


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.154000	33.7	1000.0	9.000	Off	10.0	45.3	79.0
0.182000	32.3	1000.0	9.000	Off	10.0	46.7	79.0
0.566000	33.7	1000.0	9.000	Off	10.0	39.3	73.0
1.090000	24.6	1000.0	9.000	Off	10.0	48.4	73.0
1.598000	20.3	1000.0	9.000	Off	10.0	52.7	73.0
19.222000	37.4	1000.0	9.000	Off	10.0	35.6	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.154000	27.7	1000.0	9.000	Off	10.0	38.3	66.0
0.182000	25.9	1000.0	9.000	Off	10.0	40.1	66.0
0.566000	20.9	1000.0	9.000	Off	10.0	39.1	60.0
1.090000	13.5	1000.0	9.000	Off	10.0	46.5	60.0
1.598000	11.5	1000.0	9.000	Off	10.0	48.5	60.0
19.222000	19.4	1000.0	9.000	Off	10.0	40.6	60.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line Negative (DC input, 230V~/50Hz, Running mode)

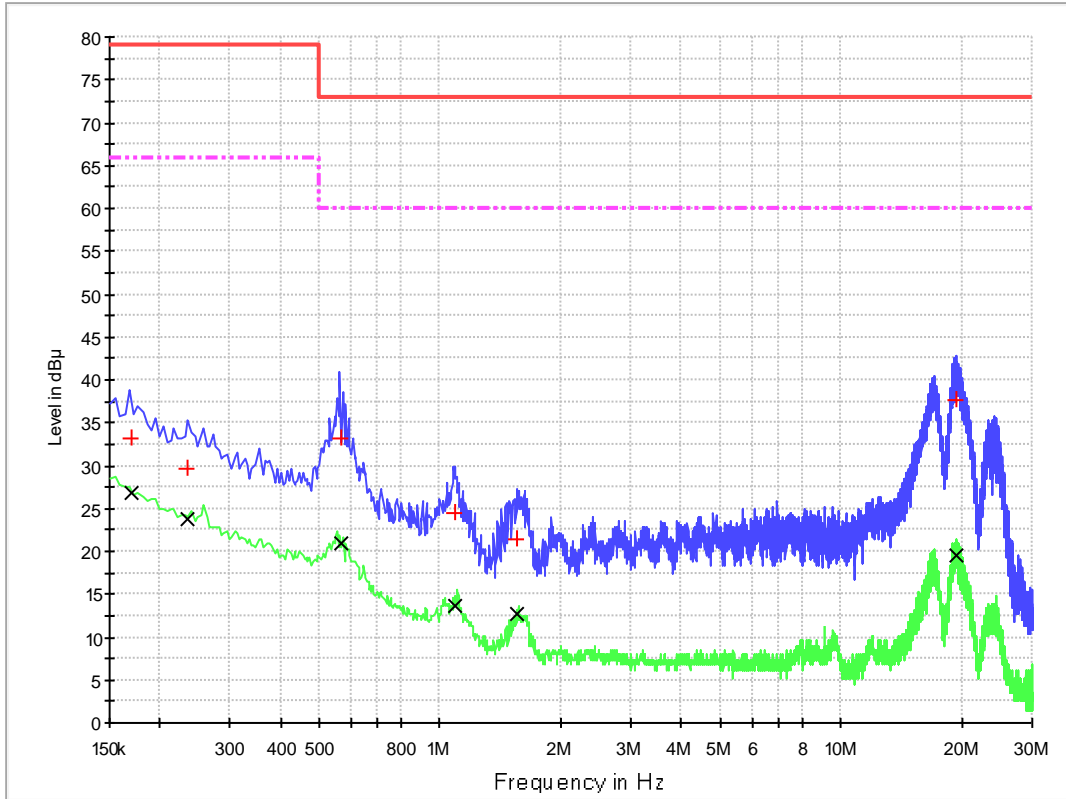


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.170000	33.2	1000.0	9.000	Off	10.0	45.8	79.0
0.234000	29.7	1000.0	9.000	Off	10.0	49.3	79.0
0.566000	33.2	1000.0	9.000	Off	10.0	39.8	73.0
1.090000	24.4	1000.0	9.000	Off	10.0	48.6	73.0
1.562000	21.5	1000.0	9.000	Off	10.0	51.5	73.0
19.378000	37.6	1000.0	9.000	Off	10.0	35.4	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.170000	26.7	1000.0	9.000	Off	10.0	39.3	66.0
0.234000	23.7	1000.0	9.000	Off	10.0	42.3	66.0
0.566000	20.9	1000.0	9.000	Off	10.0	39.1	60.0
1.090000	13.7	1000.0	9.000	Off	10.0	46.3	60.0
1.562000	12.8	1000.0	9.000	Off	10.0	47.2	60.0
19.378000	19.6	1000.0	9.000	Off	10.0	40.4	60.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line Positive (DC output, 110V~/60Hz, Charging mode)

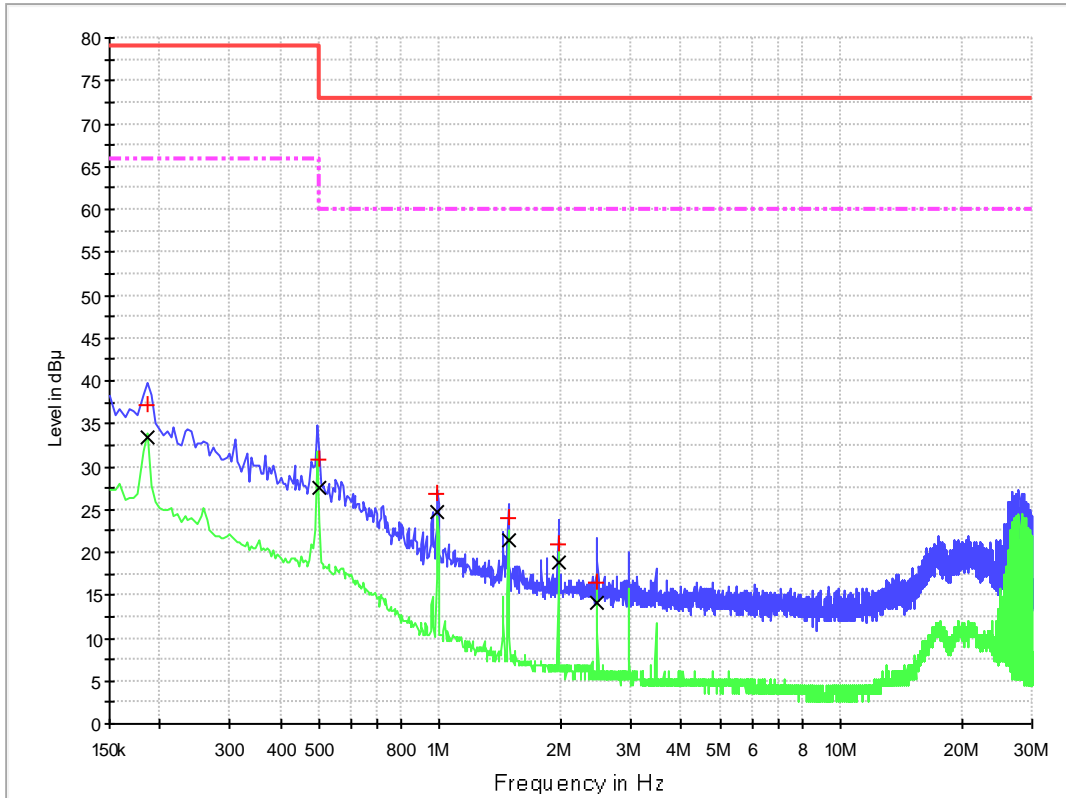


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.186000	37.2	1000.0	9.000	Off	10.0	41.8	79.0
0.498000	30.9	1000.0	9.000	Off	10.0	48.1	79.0
0.986000	26.8	1000.0	9.000	Off	10.0	46.2	73.0
1.482000	23.9	1000.0	9.000	Off	10.0	49.1	73.0
1.978000	21.0	1000.0	9.000	Off	10.0	52.0	73.0
2.466000	16.5	1000.0	9.000	Off	10.0	56.5	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.186000	33.4	1000.0	9.000	Off	10.0	32.6	66.0
0.498000	27.6	1000.0	9.000	Off	10.0	38.4	66.0
0.986000	24.7	1000.0	9.000	Off	10.0	35.3	60.0
1.482000	21.3	1000.0	9.000	Off	10.0	38.7	60.0
1.978000	18.7	1000.0	9.000	Off	10.0	41.3	60.0
2.466000	14.1	1000.0	9.000	Off	10.0	45.9	60.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line Negative (DC output, 110V~/60Hz, Charging mode)

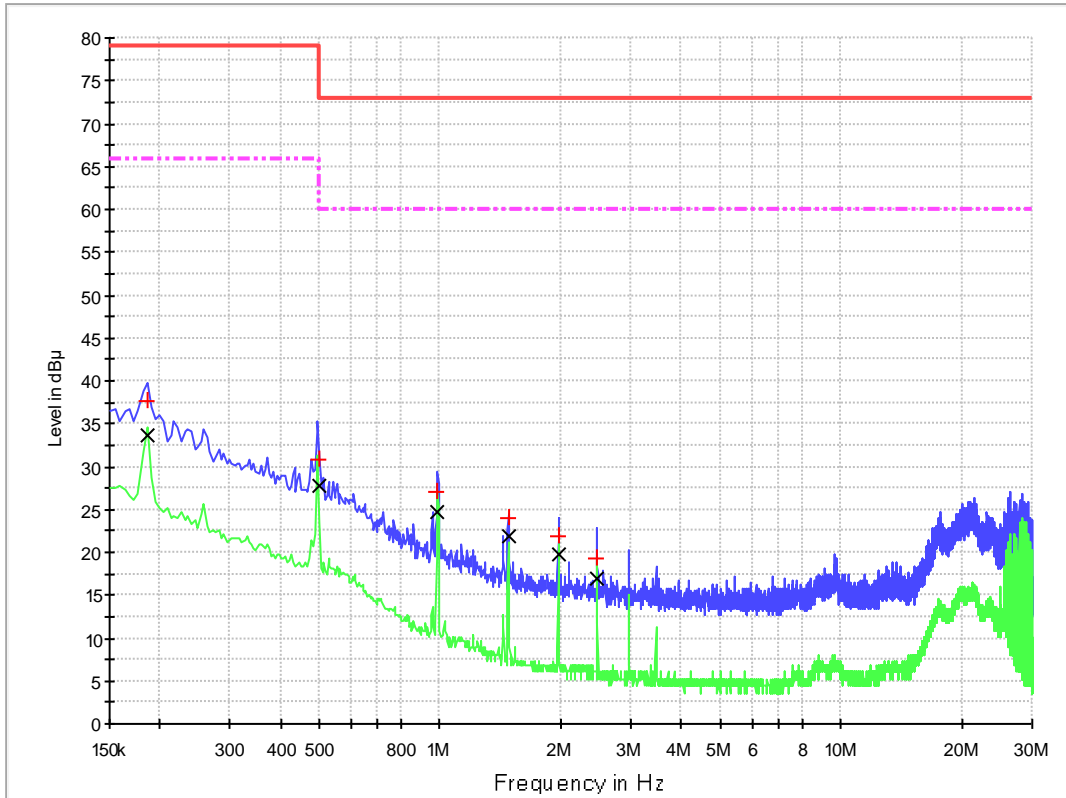


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.186000	37.5	1000.0	9.000	Off	10.0	41.5	79.0
0.498000	30.9	1000.0	9.000	Off	10.0	48.1	79.0
0.986000	27.1	1000.0	9.000	Off	10.0	45.9	73.0
1.482000	23.9	1000.0	9.000	Off	10.0	49.1	73.0
1.978000	21.8	1000.0	9.000	Off	10.0	51.2	73.0
2.474000	19.2	1000.0	9.000	Off	10.0	53.8	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.186000	33.7	1000.0	9.000	Off	10.0	32.3	66.0
0.498000	27.7	1000.0	9.000	Off	10.0	38.3	66.0
0.986000	24.6	1000.0	9.000	Off	10.0	35.4	60.0
1.482000	21.9	1000.0	9.000	Off	10.0	38.1	60.0
1.978000	19.8	1000.0	9.000	Off	10.0	40.2	60.0
2.474000	16.9	1000.0	9.000	Off	10.0	43.1	60.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line Positive (DC output, 230V~/50Hz, Charging mode)

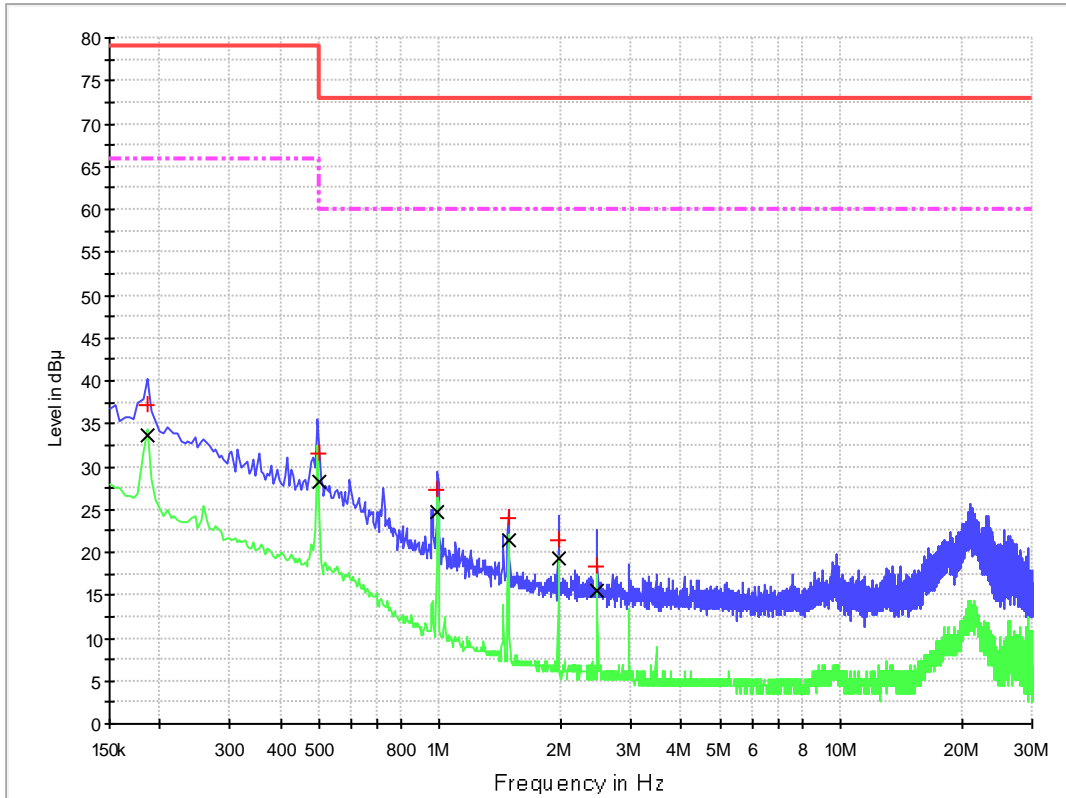


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.186000	37.2	1000.0	9.000	Off	10.0	41.8	79.0
0.498000	31.4	1000.0	9.000	Off	10.0	47.6	79.0
0.986000	27.2	1000.0	9.000	Off	10.0	45.8	73.0
1.482000	24.1	1000.0	9.000	Off	10.0	48.9	73.0
1.978000	21.3	1000.0	9.000	Off	10.0	51.7	73.0
2.474000	18.2	1000.0	9.000	Off	10.0	54.8	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.186000	33.7	1000.0	9.000	Off	10.0	32.3	66.0
0.498000	28.2	1000.0	9.000	Off	10.0	37.8	66.0
0.986000	24.7	1000.0	9.000	Off	10.0	35.3	60.0
1.482000	21.5	1000.0	9.000	Off	10.0	38.5	60.0
1.978000	19.3	1000.0	9.000	Off	10.0	40.7	60.0
2.474000	15.5	1000.0	9.000	Off	10.0	44.5	60.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line Negative (DC output, 230V~/50Hz, Charging mode)

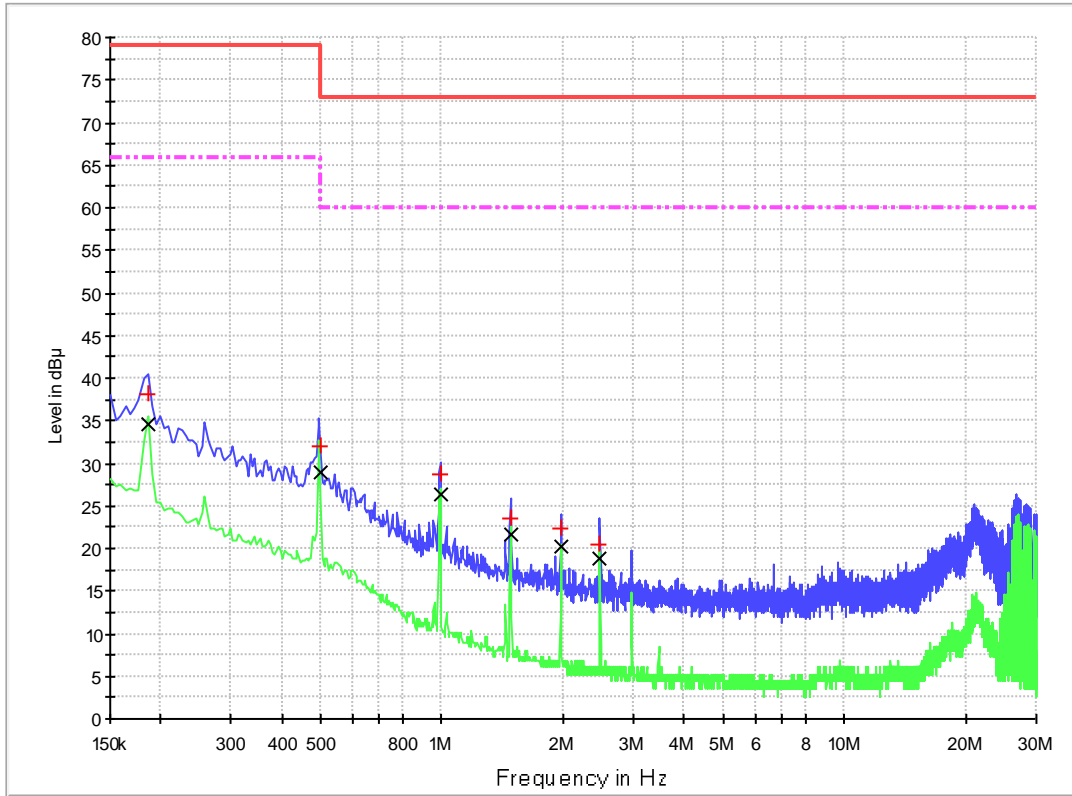


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.186000	38.1	1000.0	9.000	Off	10.0	40.9	79.0
0.498000	32.1	1000.0	9.000	Off	10.0	46.9	79.0
0.990000	28.8	1000.0	9.000	Off	10.0	44.2	73.0
1.482000	23.5	1000.0	9.000	Off	10.0	49.5	73.0
1.978000	22.3	1000.0	9.000	Off	10.0	50.7	73.0
2.474000	20.6	1000.0	9.000	Off	10.0	52.4	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.186000	34.7	1000.0	9.000	Off	10.0	31.3	66.0
0.498000	28.9	1000.0	9.000	Off	10.0	37.1	66.0
0.990000	26.4	1000.0	9.000	Off	10.0	33.6	60.0
1.482000	21.6	1000.0	9.000	Off	10.0	38.4	60.0
1.978000	20.2	1000.0	9.000	Off	10.0	39.8	60.0
2.474000	18.8	1000.0	9.000	Off	10.0	41.2	60.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test Positive (DC output, 110V~/60Hz, Running mode)

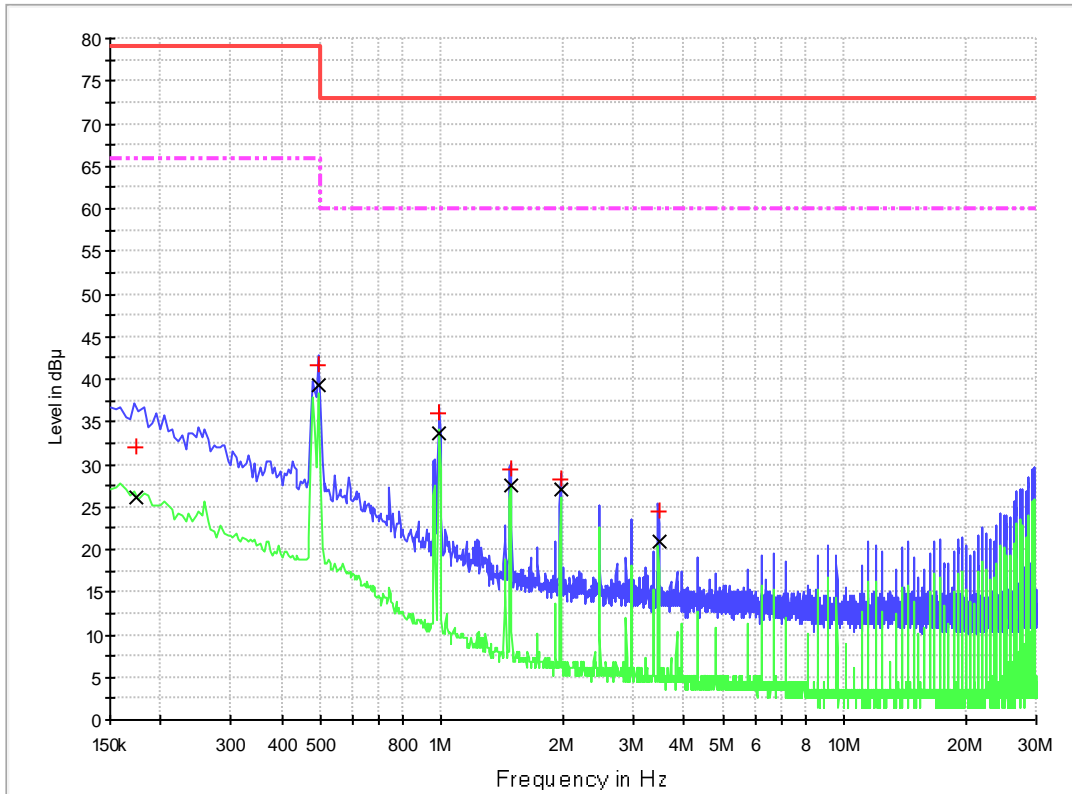


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.174000	32.1	1000.0	9.000	Off	10.0	46.9	79.0
0.494000	41.6	1000.0	9.000	Off	10.0	37.4	79.0
0.986000	36.0	1000.0	9.000	Off	10.0	37.0	73.0
1.482000	29.3	1000.0	9.000	Off	10.0	43.7	73.0
1.974000	28.2	1000.0	9.000	Off	10.0	44.8	73.0
3.454000	24.5	1000.0	9.000	Off	10.0	48.5	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.174000	26.0	1000.0	9.000	Off	10.0	40.0	66.0
0.494000	39.3	1000.0	9.000	Off	10.0	26.8	66.0
0.986000	33.8	1000.0	9.000	Off	10.0	26.2	60.0
1.482000	27.5	1000.0	9.000	Off	10.0	32.5	60.0
1.974000	27.1	1000.0	9.000	Off	10.0	32.9	60.0
3.454000	20.9	1000.0	9.000	Off	10.0	39.1	60.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line Negative (DC output, 110V~/60Hz, Running mode)

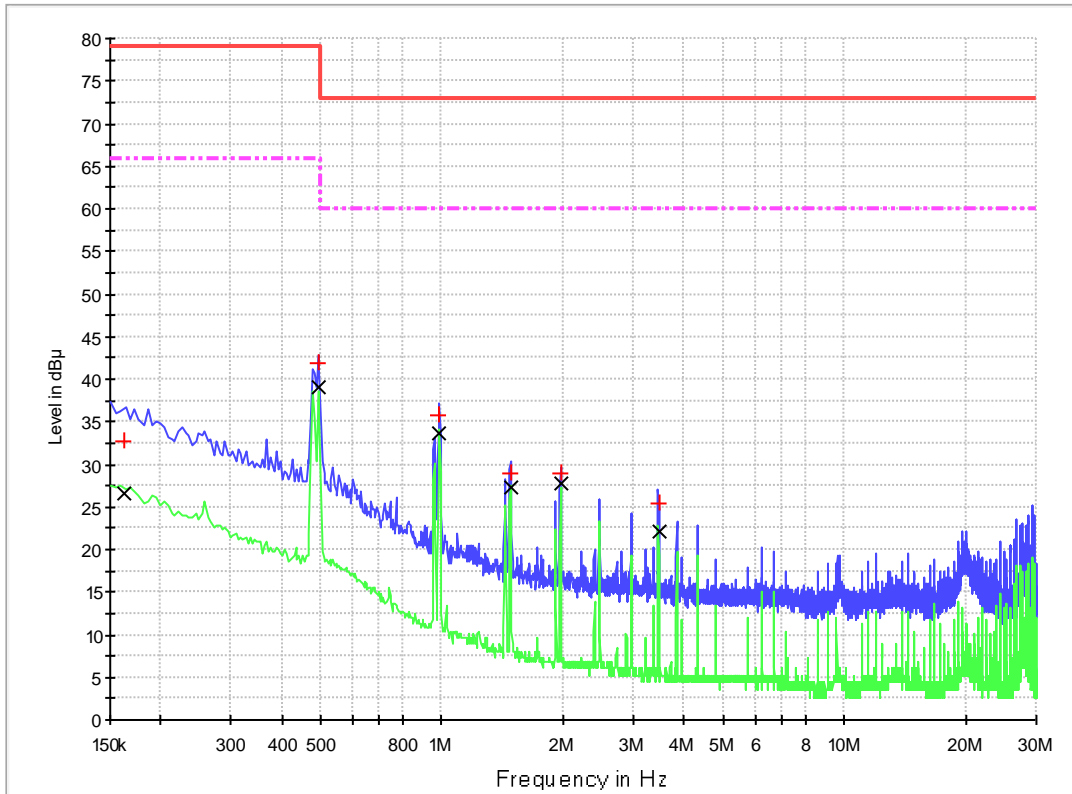


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.162000	32.8	1000.0	9.000	Off	10.0	46.2	79.0
0.494000	42.0	1000.0	9.000	Off	10.0	37.0	79.0
0.986000	35.7	1000.0	9.000	Off	10.0	37.3	73.0
1.482000	29.0	1000.0	9.000	Off	10.0	44.0	73.0
1.974000	28.8	1000.0	9.000	Off	10.0	44.2	73.0
3.454000	25.4	1000.0	9.000	Off	10.0	47.6	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.162000	26.6	1000.0	9.000	Off	10.0	39.4	66.0
0.494000	39.0	1000.0	9.000	Off	10.0	27.0	66.0
0.986000	33.6	1000.0	9.000	Off	10.0	26.4	60.0
1.482000	27.3	1000.0	9.000	Off	10.0	32.7	60.0
1.974000	27.7	1000.0	9.000	Off	10.0	32.3	60.0
3.454000	22.1	1000.0	9.000	Off	10.0	37.9	60.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line Positive (DC output, 230V~/50Hz, Running mode)

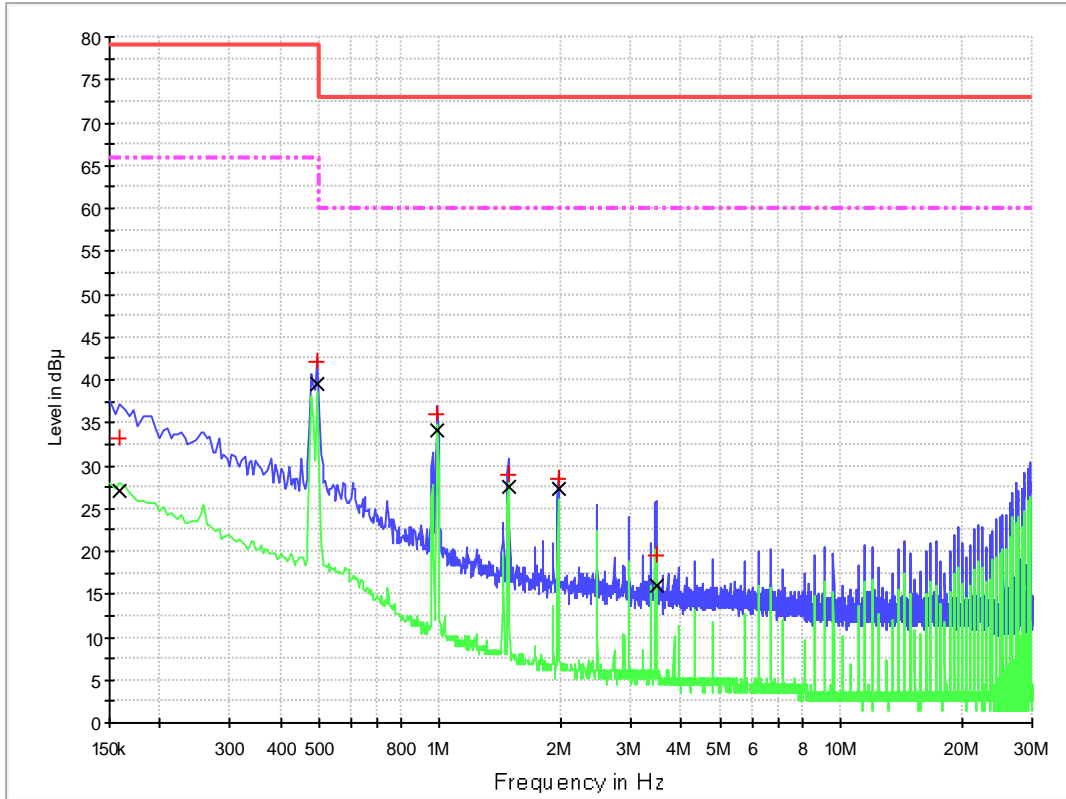


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.158000	33.3	1000.0	9.000	Off	10.0	45.7	79.0
0.494000	42.2	1000.0	9.000	Off	10.0	36.8	79.0
0.986000	36.1	1000.0	9.000	Off	10.0	36.9	73.0
1.482000	28.9	1000.0	9.000	Off	10.0	44.1	73.0
1.974000	28.4	1000.0	9.000	Off	10.0	44.6	73.0
3.458000	19.6	1000.0	9.000	Off	10.0	53.4	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.158000	27.0	1000.0	9.000	Off	10.0	39.0	66.0
0.494000	39.5	1000.0	9.000	Off	10.0	26.5	66.0
0.986000	34.1	1000.0	9.000	Off	10.0	25.9	60.0
1.482000	27.5	1000.0	9.000	Off	10.0	32.5	60.0
1.974000	27.2	1000.0	9.000	Off	10.0	32.8	60.0
3.458000	15.9	1000.0	9.000	Off	10.0	44.1	60.0

For adaptor: adapter 2_ FY2401500S2, Wi-Fi mode
 Line Under Test: Line Negative (DC output, 230V~/50Hz, Running mode)

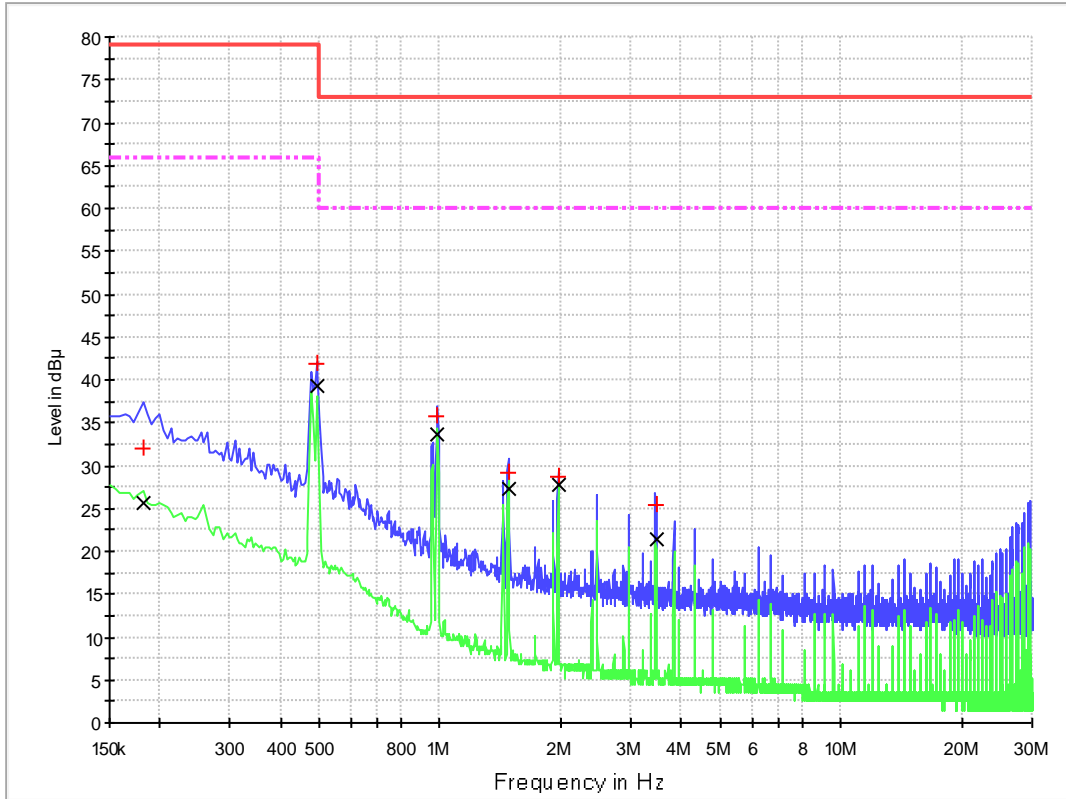


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.182000	31.9	1000.0	9.000	Off	10.0	47.1	79.0
0.494000	41.9	1000.0	9.000	Off	10.0	37.1	79.0
0.986000	35.7	1000.0	9.000	Off	10.0	37.3	73.0
1.482000	29.1	1000.0	9.000	Off	10.0	43.9	73.0
1.974000	28.7	1000.0	9.000	Off	10.0	44.3	73.0
3.454000	25.4	1000.0	9.000	Off	10.0	47.6	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.182000	25.6	1000.0	9.000	Off	10.0	40.4	66.0
0.494000	39.3	1000.0	9.000	Off	10.0	26.7	66.0
0.986000	33.7	1000.0	9.000	Off	10.0	26.3	60.0
1.482000	27.3	1000.0	9.000	Off	10.0	32.7	60.0
1.974000	27.6	1000.0	9.000	Off	10.0	32.4	60.0
3.454000	21.4	1000.0	9.000	Off	10.0	38.6	60.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line L (charging mode, 110V~/60Hz)

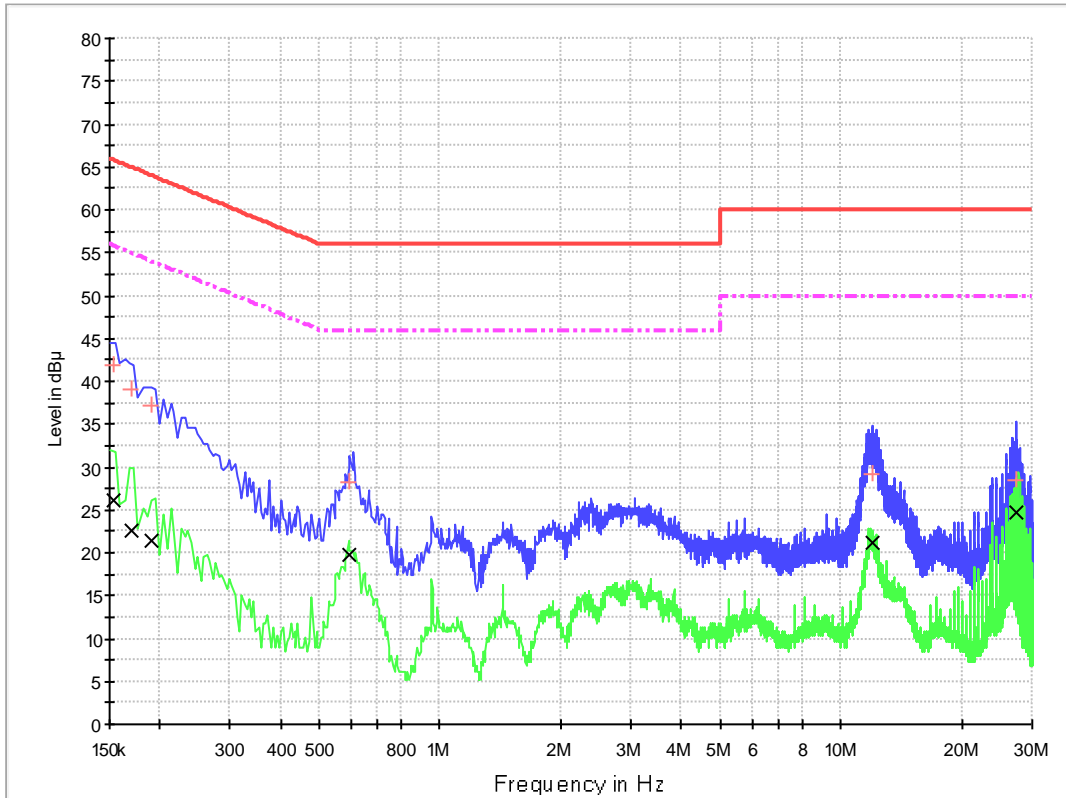


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.154000	41.9	1000.0	9.000	Off	L1	10.0	23.9	65.8
0.170000	39.0	1000.0	9.000	Off	L1	10.0	26.0	65.0
0.190000	37.1	1000.0	9.000	Off	L1	10.0	27.0	64.0
0.594000	28.3	1000.0	9.000	Off	L1	10.0	27.7	56.0
11.970000	29.2	1000.0	9.000	Off	L1	10.0	30.8	60.0
27.294000	28.5	1000.0	9.000	Off	L1	10.0	31.5	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.154000	26.1	1000.0	9.000	Off	L1	10.0	29.6	55.8
0.170000	22.6	1000.0	9.000	Off	L1	10.0	32.4	55.0
0.190000	21.3	1000.0	9.000	Off	L1	10.0	32.7	54.0
0.594000	19.7	1000.0	9.000	Off	L1	10.0	26.3	46.0
11.970000	21.2	1000.0	9.000	Off	L1	10.0	28.8	50.0
27.294000	24.8	1000.0	9.000	Off	L1	10.0	25.2	50.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line N (charging mode, 110V~/60Hz)

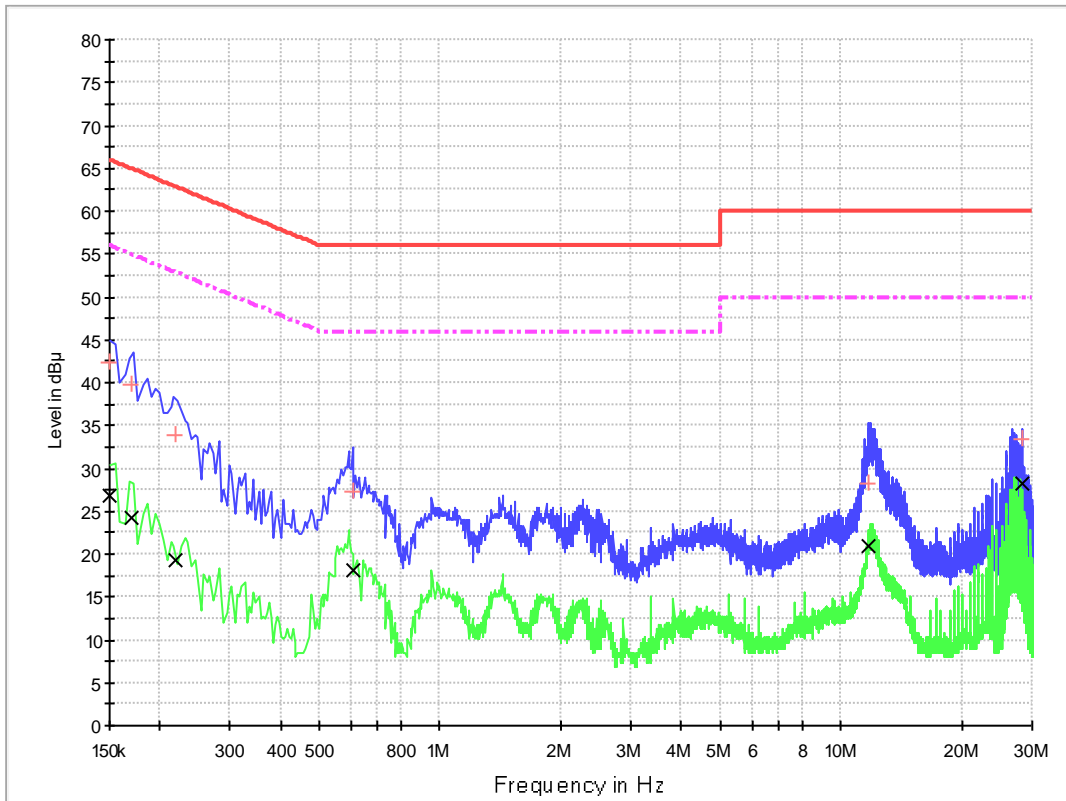


QP

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV)
0.150000	42.3	1000.0	9.000	Off	N	10.0	23.7	66.0
0.170000	39.7	1000.0	9.000	Off	N	10.0	25.3	65.0
0.218000	33.9	1000.0	9.000	Off	N	10.0	29.0	62.9
0.606000	27.3	1000.0	9.000	Off	N	10.0	28.7	56.0
11.754000	28.3	1000.0	9.000	Off	N	10.0	31.7	60.0
28.222000	33.3	1000.0	9.000	Off	N	10.0	26.7	60.0

AV

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBμV)
0.150000	26.8	1000.0	9.000	Off	N	10.0	29.2	56.0
0.170000	24.2	1000.0	9.000	Off	N	10.0	30.8	55.0
0.218000	19.2	1000.0	9.000	Off	N	10.0	33.7	52.9
0.606000	18.2	1000.0	9.000	Off	N	10.0	27.8	46.0
11.754000	21.0	1000.0	9.000	Off	N	10.0	29.0	50.0
28.222000	28.2	1000.0	9.000	Off	N	10.0	21.8	50.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line L (charging mode, 230V~/50Hz)

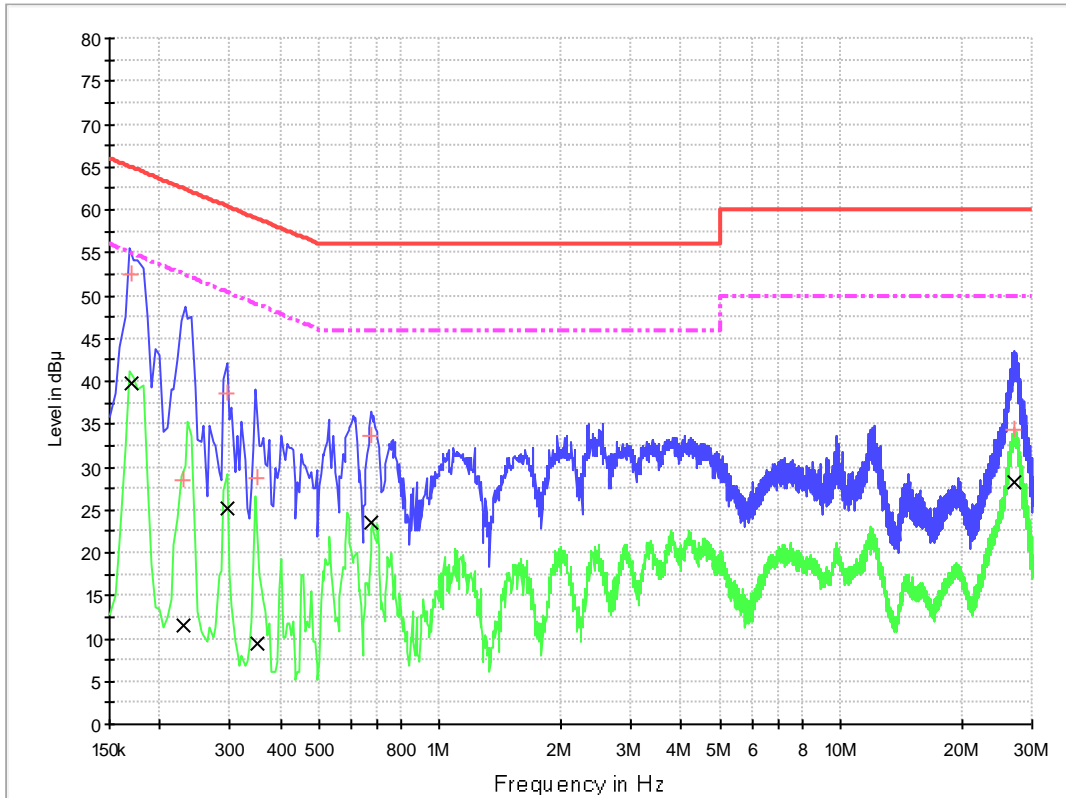


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.170000	52.5	1000.0	9.000	Off	L1	10.0	12.5	65.0
0.230000	28.5	1000.0	9.000	Off	L1	10.0	33.9	62.4
0.294000	38.5	1000.0	9.000	Off	L1	10.0	21.9	60.4
0.350000	28.7	1000.0	9.000	Off	L1	10.0	30.3	59.0
0.674000	33.7	1000.0	9.000	Off	L1	10.0	22.3	56.0
26.958000	34.3	1000.0	9.000	Off	L1	10.0	25.7	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.170000	39.8	1000.0	9.000	Off	L1	10.0	15.2	55.0
0.230000	11.5	1000.0	9.000	Off	L1	10.0	41.0	52.4
0.294000	25.2	1000.0	9.000	Off	L1	10.0	25.2	50.4
0.350000	9.3	1000.0	9.000	Off	L1	10.0	39.6	49.0
0.674000	23.6	1000.0	9.000	Off	L1	10.0	22.4	46.0
26.958000	28.3	1000.0	9.000	Off	L1	10.0	21.7	50.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line N (charging mode, 230V~/50Hz)

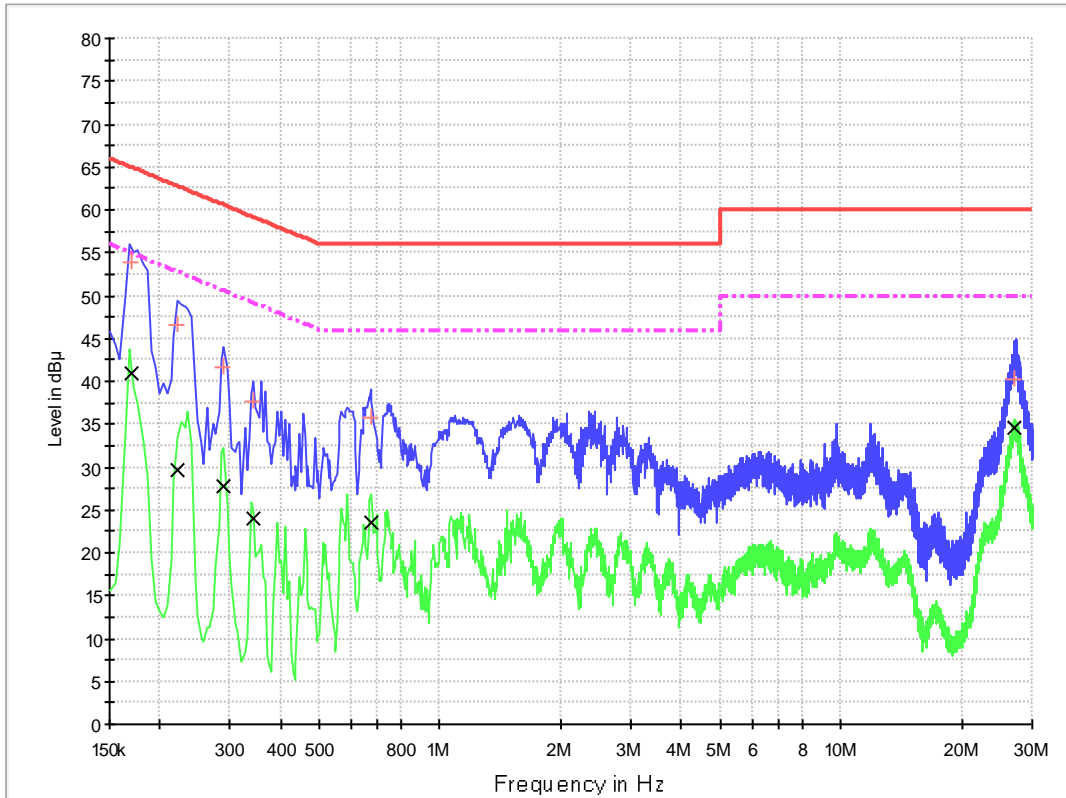


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.170000	53.9	1000.0	9.000	Off	N	10.0	11.1	65.0
0.222000	46.6	1000.0	9.000	Off	N	10.0	16.2	62.7
0.290000	41.6	1000.0	9.000	Off	N	10.0	19.0	60.5
0.342000	37.6	1000.0	9.000	Off	N	10.0	21.5	59.2
0.674000	35.9	1000.0	9.000	Off	N	10.0	20.1	56.0
27.154000	40.3	1000.0	9.000	Off	N	10.0	19.7	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.170000	40.8	1000.0	9.000	Off	N	10.0	24.1	65.0
0.222000	29.6	1000.0	9.000	Off	N	10.0	33.2	62.7
0.290000	27.8	1000.0	9.000	Off	N	10.0	32.8	60.5
0.342000	24.0	1000.0	9.000	Off	N	10.0	35.2	59.2
0.674000	23.5	1000.0	9.000	Off	N	10.0	32.5	56.0
27.154000	34.5	1000.0	9.000	Off	N	10.0	25.5	60.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line L (running mode, 110V~/60Hz)

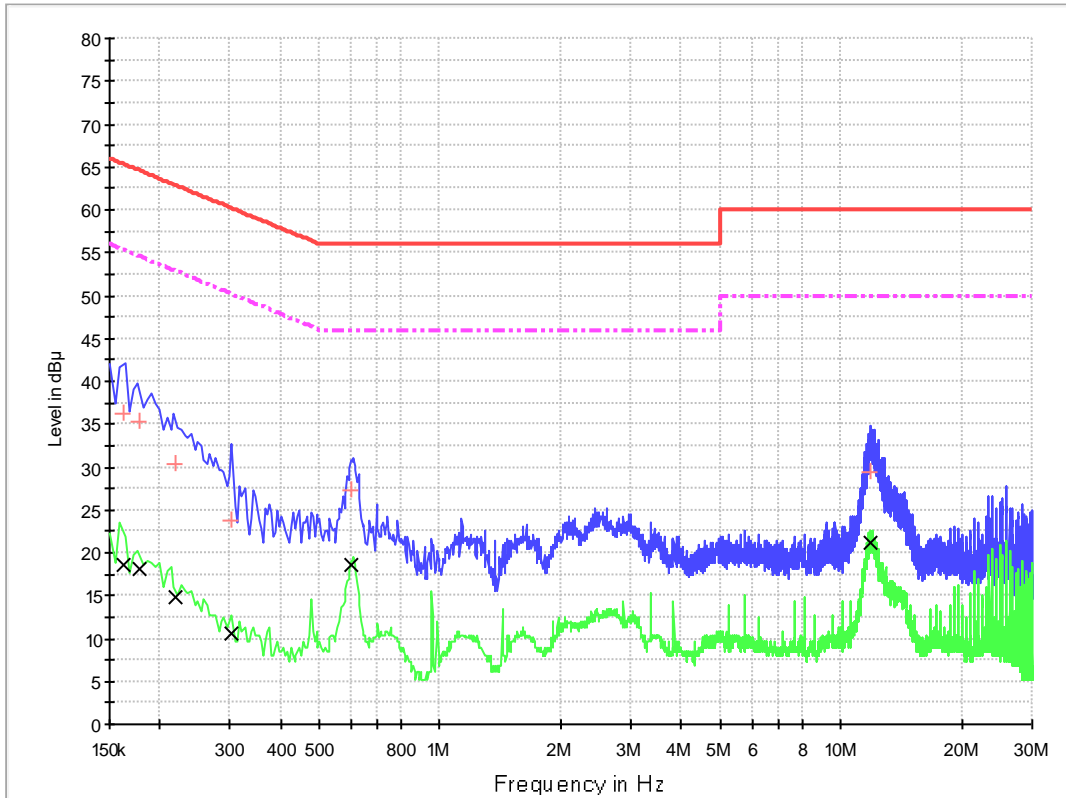


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.162000	36.3	1000.0	9.000	Off	L1	10.0	29.0	65.4
0.178000	35.2	1000.0	9.000	Off	L1	10.0	29.4	64.6
0.218000	30.5	1000.0	9.000	Off	L1	10.0	32.4	62.9
0.302000	23.8	1000.0	9.000	Off	L1	10.0	36.4	60.2
0.602000	27.3	1000.0	9.000	Off	L1	10.0	28.7	56.0
11.886000	29.3	1000.0	9.000	Off	L1	10.0	30.7	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.162000	18.6	1000.0	9.000	Off	L1	10.0	36.7	55.4
0.178000	18.1	1000.0	9.000	Off	L1	10.0	36.4	54.6
0.218000	14.8	1000.0	9.000	Off	L1	10.0	38.1	52.9
0.302000	10.6	1000.0	9.000	Off	L1	10.0	39.6	50.2
0.602000	18.6	1000.0	9.000	Off	L1	10.0	27.4	46.0
11.886000	21.2	1000.0	9.000	Off	L1	10.0	28.8	50.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line N (running mode, 110V~/60Hz)

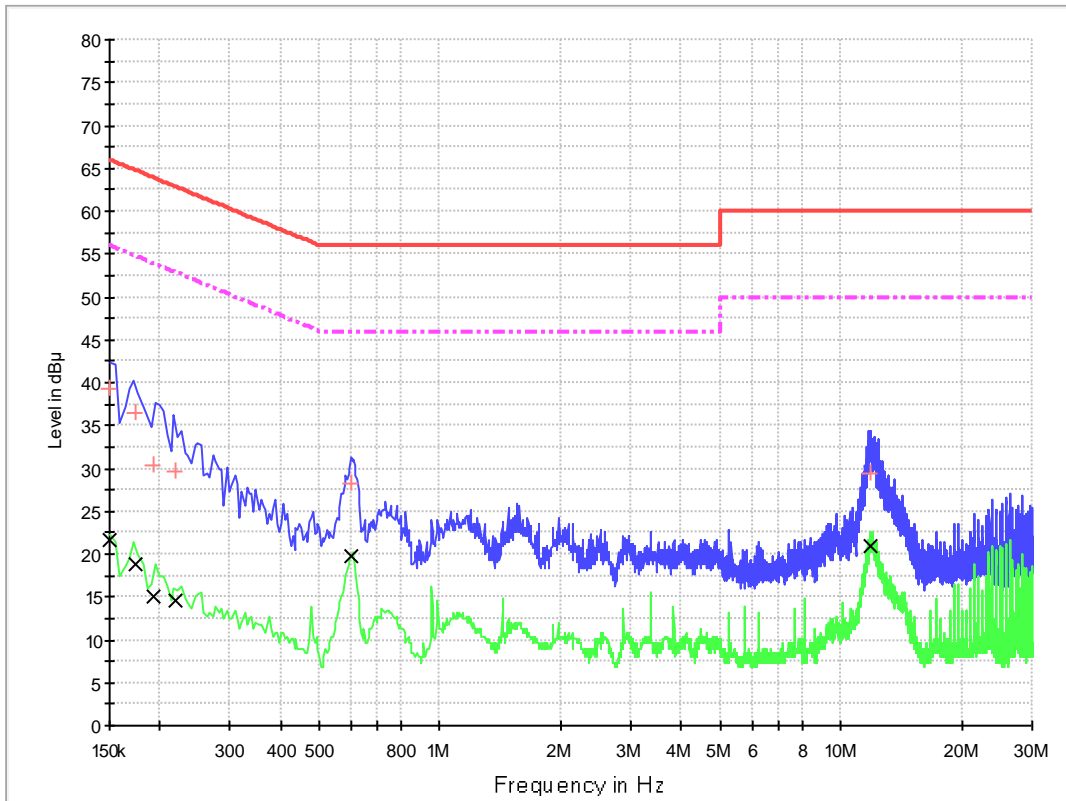


QP

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV)
0.150000	39.4	1000.0	9.000	Off	N	10.0	26.6	66.0
0.174000	36.5	1000.0	9.000	Off	N	10.0	28.3	64.8
0.194000	30.5	1000.0	9.000	Off	N	10.0	33.4	63.9
0.218000	29.6	1000.0	9.000	Off	N	10.0	33.3	62.9
0.602000	28.3	1000.0	9.000	Off	N	10.0	27.7	56.0
11.886000	29.3	1000.0	9.000	Off	N	10.0	30.7	60.0

AV

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBμV)
0.150000	21.6	1000.0	9.000	Off	N	10.0	34.4	56.0
0.174000	18.9	1000.0	9.000	Off	N	10.0	35.9	54.8
0.194000	15.0	1000.0	9.000	Off	N	10.0	38.9	53.9
0.218000	14.6	1000.0	9.000	Off	N	10.0	38.3	52.9
0.602000	19.8	1000.0	9.000	Off	N	10.0	26.2	46.0
11.886000	20.9	1000.0	9.000	Off	N	10.0	29.1	50.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line L (running mode, 230V~/50Hz)

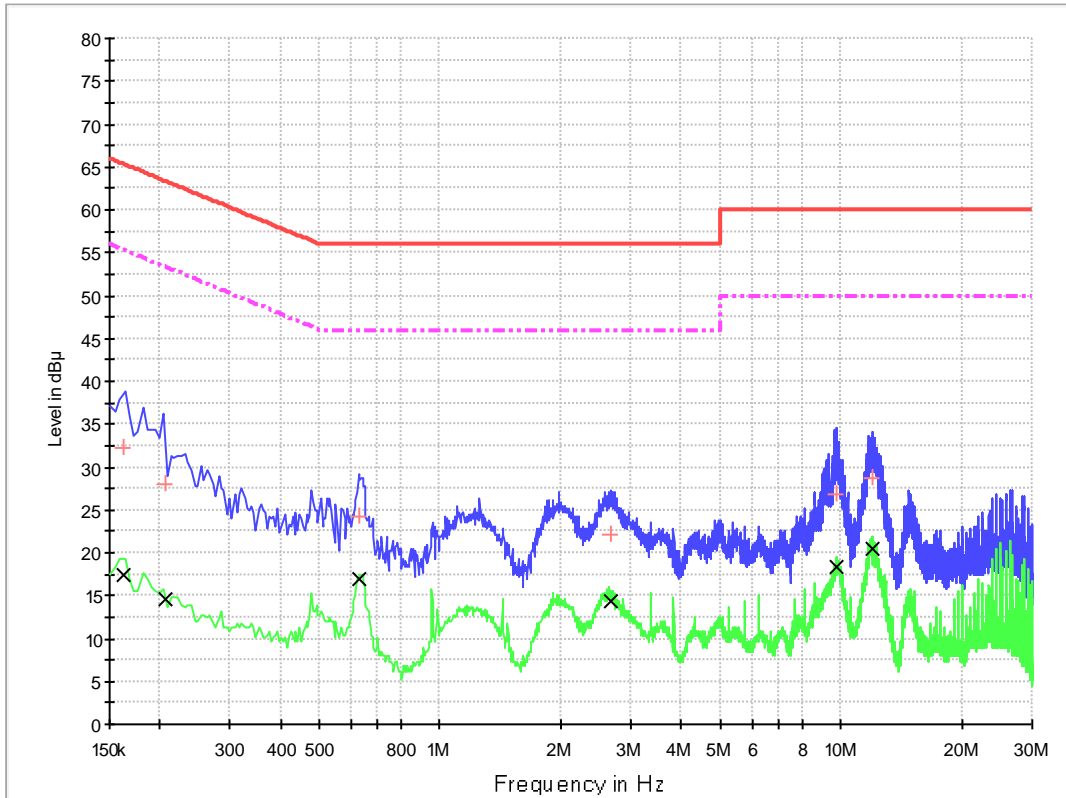


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.162000	32.2	1000.0	9.000	Off	L1	10.0	33.1	65.4
0.206000	27.9	1000.0	9.000	Off	L1	10.0	35.5	63.4
0.626000	24.2	1000.0	9.000	Off	L1	10.0	31.8	56.0
2.682000	22.2	1000.0	9.000	Off	L1	10.0	33.8	56.0
9.794000	26.8	1000.0	9.000	Off	L1	10.0	33.2	60.0
11.994000	28.7	1000.0	9.000	Off	L1	10.0	31.3	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.162000	17.5	1000.0	9.000	Off	L1	10.0	37.9	55.4
0.206000	14.6	1000.0	9.000	Off	L1	10.0	38.8	53.4
0.626000	16.9	1000.0	9.000	Off	L1	10.0	29.1	46.0
2.682000	14.2	1000.0	9.000	Off	L1	10.0	31.8	46.0
9.794000	18.4	1000.0	9.000	Off	L1	10.0	31.6	50.0
11.994000	20.4	1000.0	9.000	Off	L1	10.0	29.6	50.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line N (running mode, 230V~/50Hz)

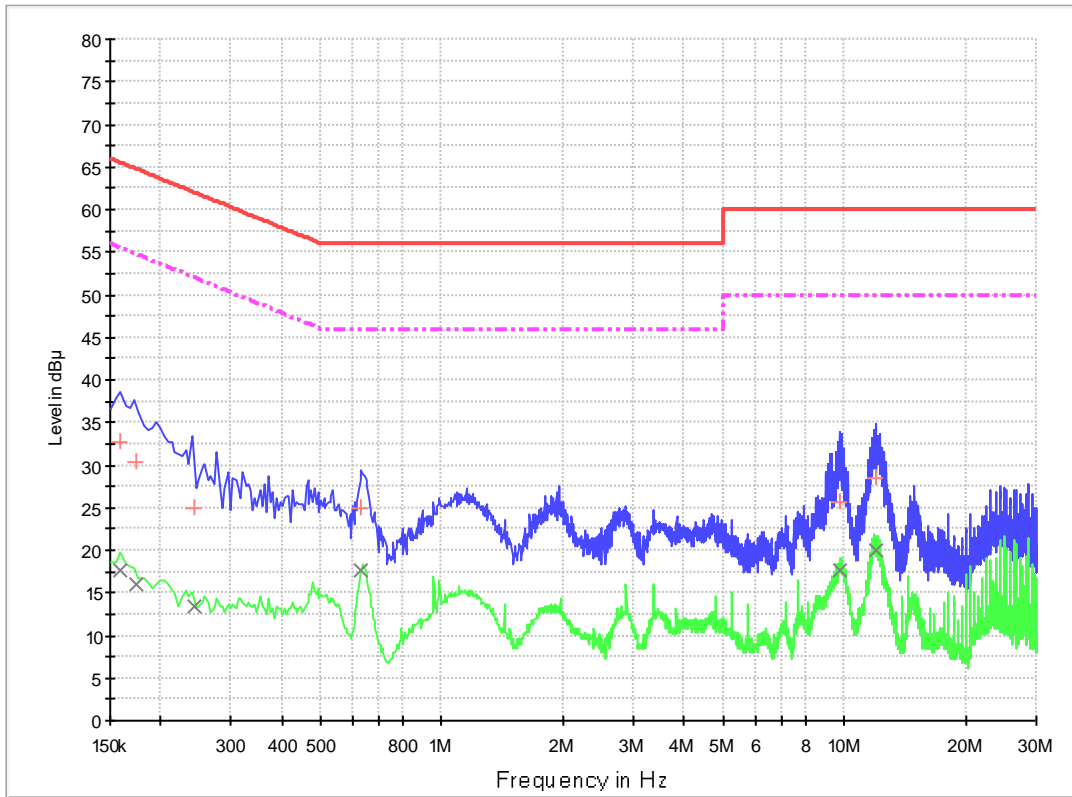


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.158000	32.8	1000.0	9.000	Off	N	10.0	32.8	65.6
0.174000	30.3	1000.0	9.000	Off	N	10.0	34.5	64.8
0.242000	24.9	1000.0	9.000	Off	N	10.0	37.1	62.0
0.630000	24.9	1000.0	9.000	Off	N	10.0	31.1	56.0
9.794000	25.6	1000.0	9.000	Off	N	10.0	34.4	60.0
11.966000	28.4	1000.0	9.000	Off	N	10.0	31.6	60.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.158000	17.6	1000.0	9.000	Off	N	10.0	37.9	55.6
0.174000	16.1	1000.0	9.000	Off	N	10.0	38.7	54.8
0.242000	13.3	1000.0	9.000	Off	N	10.0	38.7	52.0
0.630000	17.6	1000.0	9.000	Off	N	10.0	28.4	46.0
9.794000	17.7	1000.0	9.000	Off	N	10.0	32.3	50.0
11.966000	20.0	1000.0	9.000	Off	N	10.0	30.0	50.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line Positive (DC input, 110V~/60Hz, Charging mode)

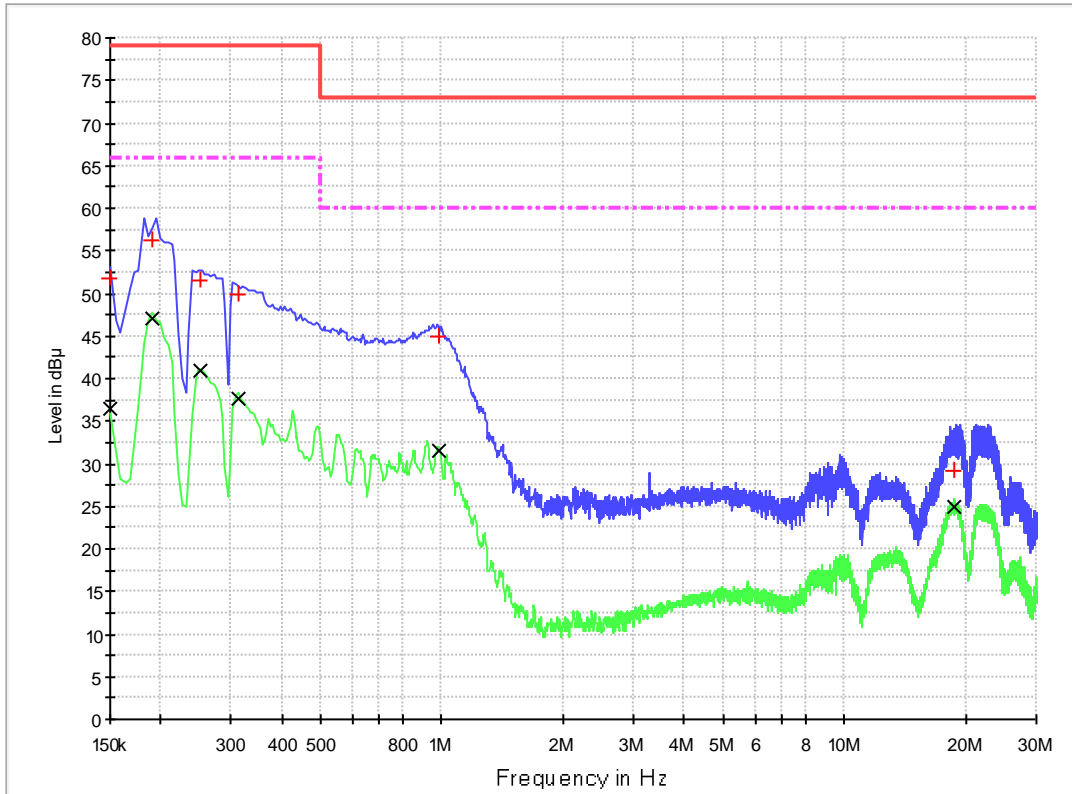


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	51.7	1000.0	9.000	Off	10.0	27.3	79.0
0.190000	56.2	1000.0	9.000	Off	10.0	22.8	79.0
0.250000	51.6	1000.0	9.000	Off	10.0	27.4	79.0
0.314000	49.8	1000.0	9.000	Off	10.0	29.2	79.0
0.982000	45.0	1000.0	9.000	Off	10.0	28.0	73.0
18.790000	29.2	1000.0	9.000	Off	10.0	43.8	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	36.4	1000.0	9.000	Off	10.0	29.6	66.0
0.190000	47.1	1000.0	9.000	Off	10.0	18.9	66.0
0.250000	41.0	1000.0	9.000	Off	10.0	25.0	66.0
0.314000	37.6	1000.0	9.000	Off	10.0	28.4	66.0
0.982000	31.4	1000.0	9.000	Off	10.0	28.6	60.0
18.790000	24.9	1000.0	9.000	Off	10.0	35.1	60.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line Negative (DC input, 110V~/60Hz, Charging mode)

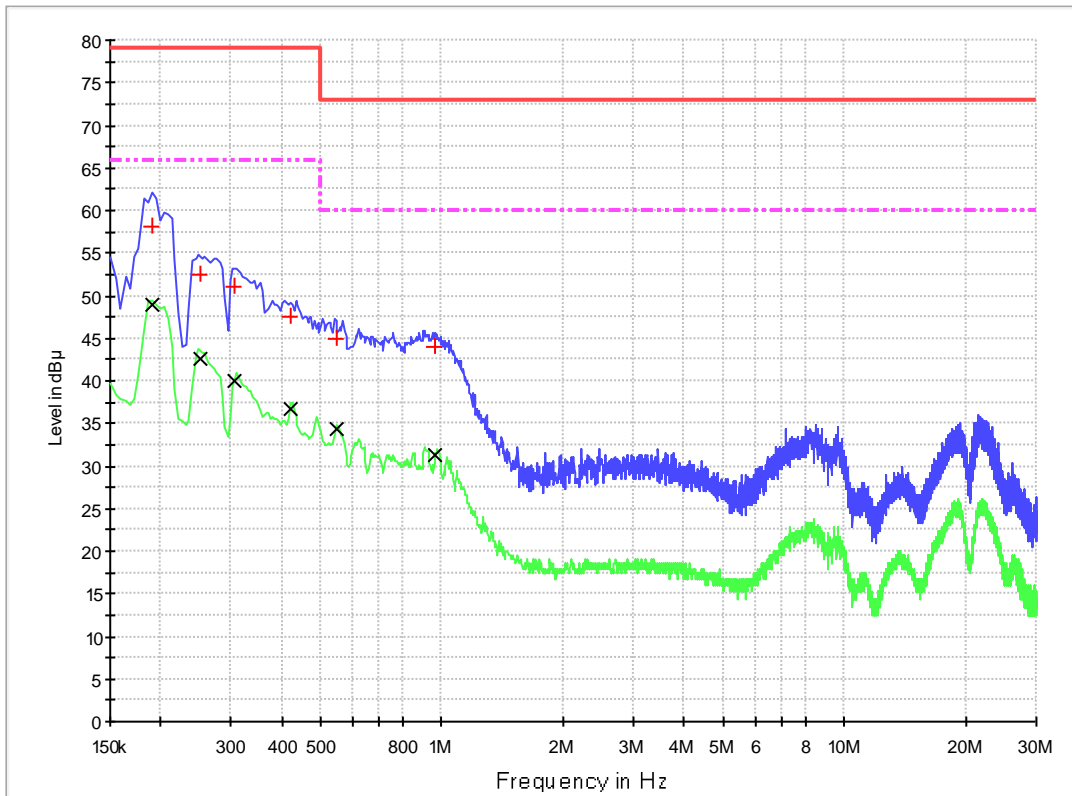


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.190000	58.0	1000.0	9.000	Off	10.0	21.0	79.0
0.250000	52.4	1000.0	9.000	Off	10.0	26.6	79.0
0.306000	51.2	1000.0	9.000	Off	10.0	27.8	79.0
0.422000	47.4	1000.0	9.000	Off	10.0	31.6	79.0
0.550000	44.8	1000.0	9.000	Off	10.0	28.2	73.0
0.966000	44.0	1000.0	9.000	Off	10.0	29.0	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.190000	49.0	1000.0	9.000	Off	10.0	17.0	66.0
0.250000	42.7	1000.0	9.000	Off	10.0	23.3	66.0
0.306000	40.0	1000.0	9.000	Off	10.0	26.0	66.0
0.422000	36.8	1000.0	9.000	Off	10.0	29.2	66.0
0.550000	34.4	1000.0	9.000	Off	10.0	25.6	60.0
0.966000	31.4	1000.0	9.000	Off	10.0	28.6	60.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line Positive (DC input, 230V~/50Hz, Charging mode)

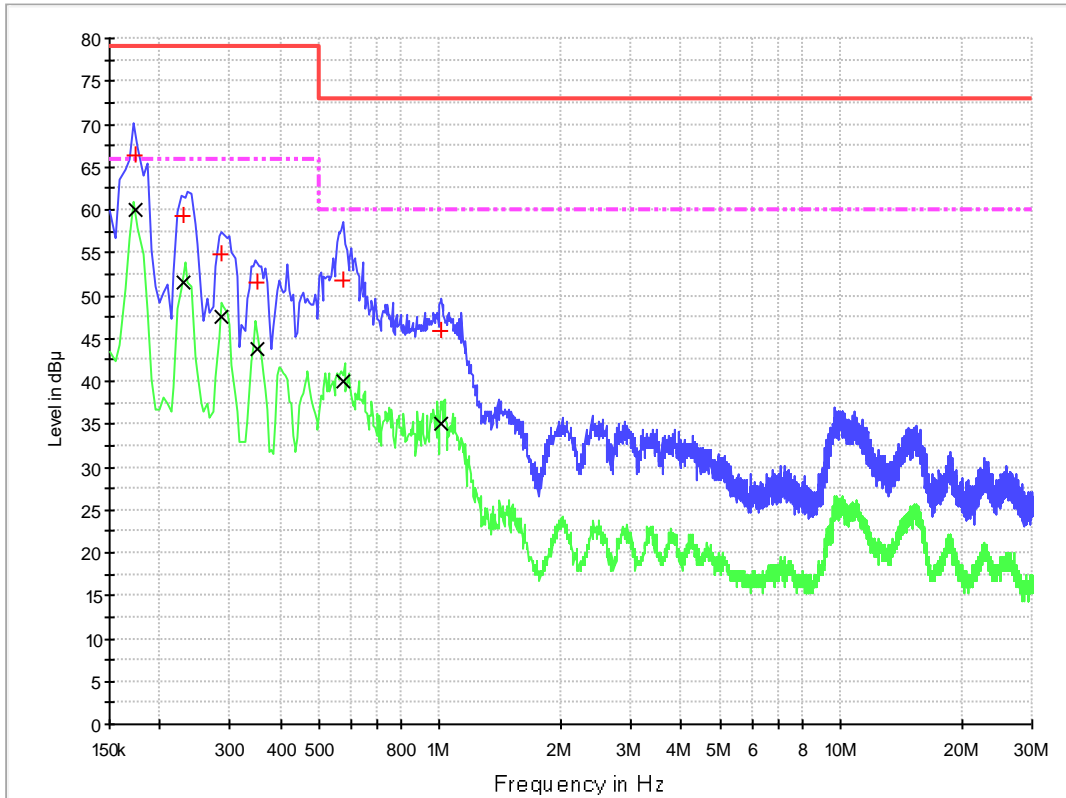


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.174000	66.3	1000.0	9.000	Off	10.0	12.7	79.0
0.230000	59.4	1000.0	9.000	Off	10.0	19.6	79.0
0.286000	54.8	1000.0	9.000	Off	10.0	24.2	79.0
0.350000	51.5	1000.0	9.000	Off	10.0	27.5	79.0
0.574000	51.8	1000.0	9.000	Off	10.0	21.2	73.0
1.010000	45.9	1000.0	9.000	Off	10.0	27.1	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.174000	59.9	1000.0	9.000	Off	10.0	6.1	66.0
0.230000	51.5	1000.0	9.000	Off	10.0	14.5	66.0
0.286000	47.4	1000.0	9.000	Off	10.0	18.6	66.0
0.350000	43.8	1000.0	9.000	Off	10.0	22.2	66.0
0.574000	39.9	1000.0	9.000	Off	10.0	20.1	60.0
1.010000	35.1	1000.0	9.000	Off	10.0	24.9	60.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line Negative (DC input, 230V~/50Hz, Charging mode)

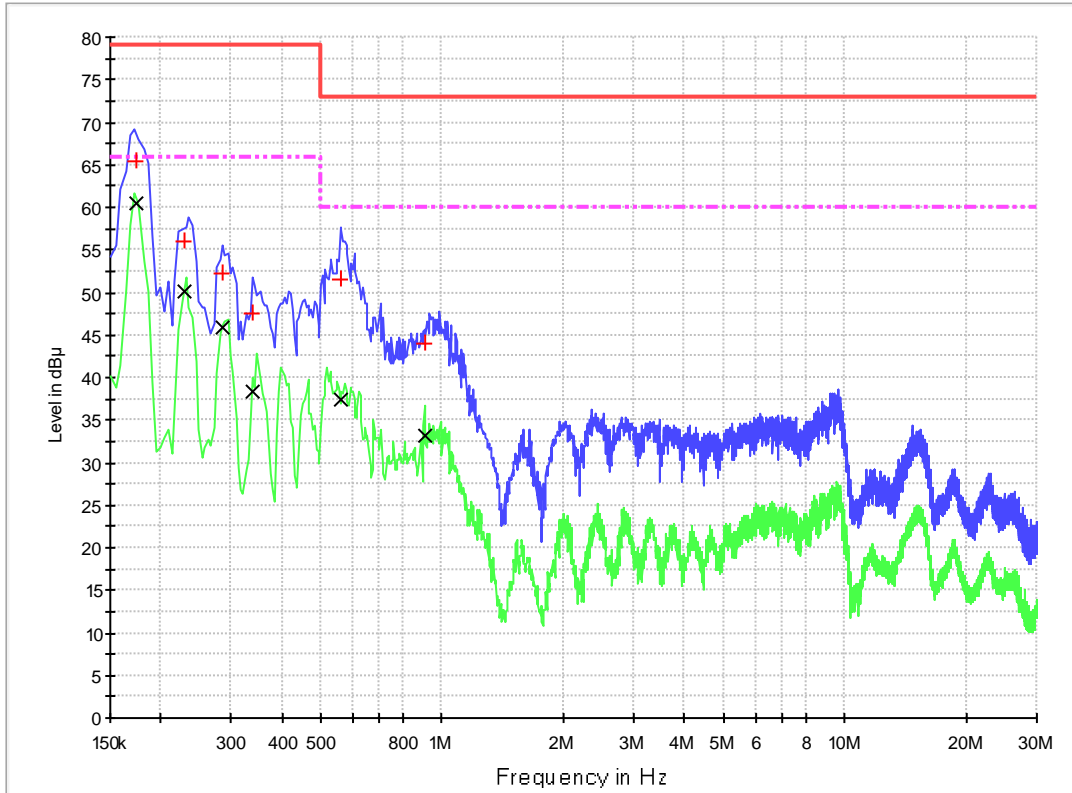


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.174000	65.5	1000.0	9.000	Off	10.0	13.5	79.0
0.230000	56.0	1000.0	9.000	Off	10.0	23.0	79.0
0.286000	52.3	1000.0	9.000	Off	10.0	26.7	79.0
0.338000	47.6	1000.0	9.000	Off	10.0	31.4	79.0
0.558000	51.6	1000.0	9.000	Off	10.0	21.4	73.0
0.906000	44.1	1000.0	9.000	Off	10.0	28.9	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.174000	60.4	1000.0	9.000	Off	10.0	5.6	66.0
0.230000	50.1	1000.0	9.000	Off	10.0	15.9	66.0
0.286000	45.8	1000.0	9.000	Off	10.0	20.2	66.0
0.338000	38.4	1000.0	9.000	Off	10.0	27.6	66.0
0.558000	37.4	1000.0	9.000	Off	10.0	22.6	60.0
0.906000	33.2	1000.0	9.000	Off	10.0	26.8	60.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line Positive (DC input, 110V~/60Hz, Running mode)

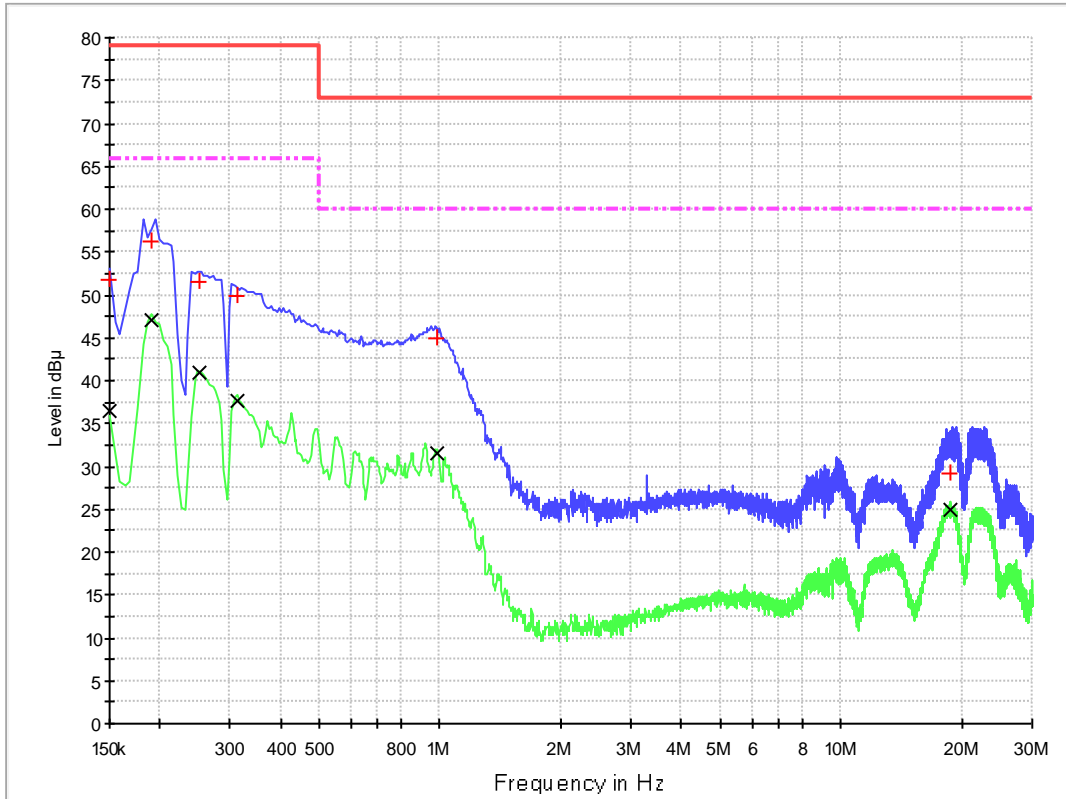


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	51.7	1000.0	9.000	Off	10.0	27.3	79.0
0.190000	56.2	1000.0	9.000	Off	10.0	22.8	79.0
0.250000	51.6	1000.0	9.000	Off	10.0	27.4	79.0
0.314000	49.8	1000.0	9.000	Off	10.0	29.2	79.0
0.982000	45.0	1000.0	9.000	Off	10.0	28.0	73.0
18.790000	29.2	1000.0	9.000	Off	10.0	43.8	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	36.4	1000.0	9.000	Off	10.0	29.6	66.0
0.190000	47.1	1000.0	9.000	Off	10.0	18.9	66.0
0.250000	41.0	1000.0	9.000	Off	10.0	25.0	66.0
0.314000	37.6	1000.0	9.000	Off	10.0	28.4	66.0
0.982000	31.4	1000.0	9.000	Off	10.0	28.6	60.0
18.790000	24.9	1000.0	9.000	Off	10.0	35.1	60.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line Negative (DC input, 110V~/60Hz, Running mode)

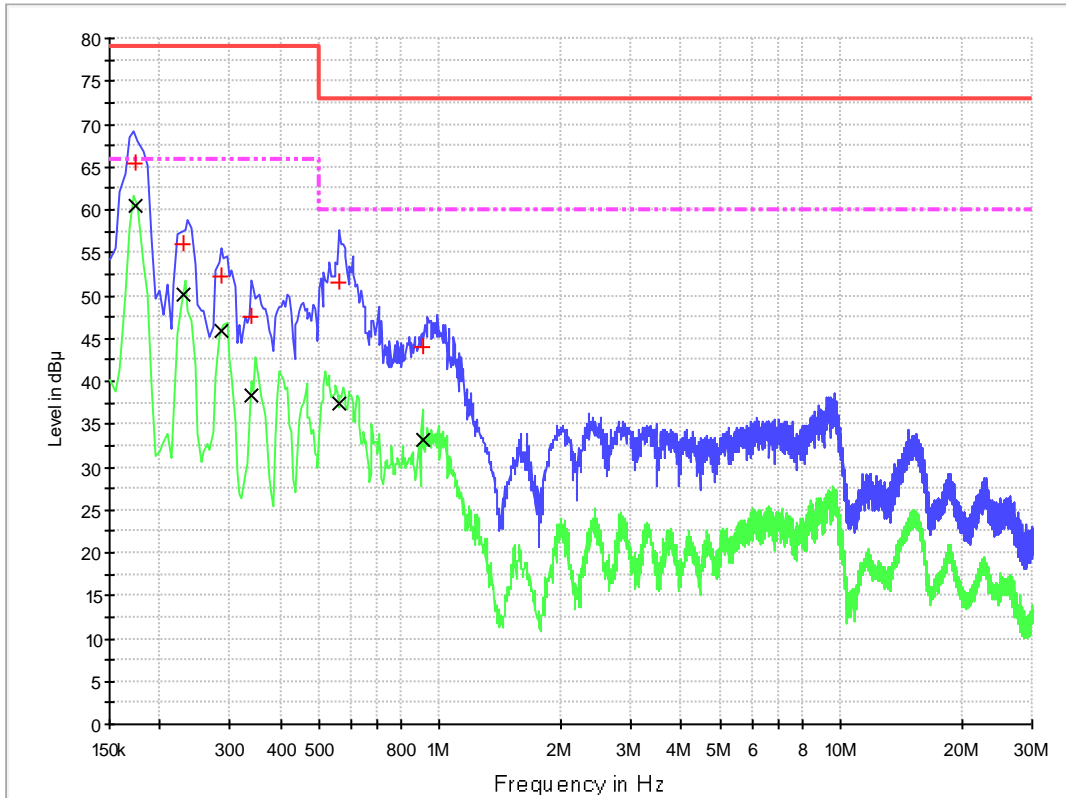


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.174000	65.5	1000.0	9.000	Off	10.0	13.5	79.0
0.230000	56.0	1000.0	9.000	Off	10.0	23.0	79.0
0.286000	52.3	1000.0	9.000	Off	10.0	26.7	79.0
0.338000	47.6	1000.0	9.000	Off	10.0	31.4	79.0
0.558000	51.6	1000.0	9.000	Off	10.0	21.4	73.0
0.906000	44.1	1000.0	9.000	Off	10.0	28.9	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.174000	60.4	1000.0	9.000	Off	10.0	5.6	66.0
0.230000	50.1	1000.0	9.000	Off	10.0	15.9	66.0
0.286000	45.8	1000.0	9.000	Off	10.0	20.2	66.0
0.338000	38.4	1000.0	9.000	Off	10.0	27.6	66.0
0.558000	37.4	1000.0	9.000	Off	10.0	22.6	60.0
0.906000	33.2	1000.0	9.000	Off	10.0	26.8	60.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line Positive (DC input, 230V~/50Hz, Running mode)

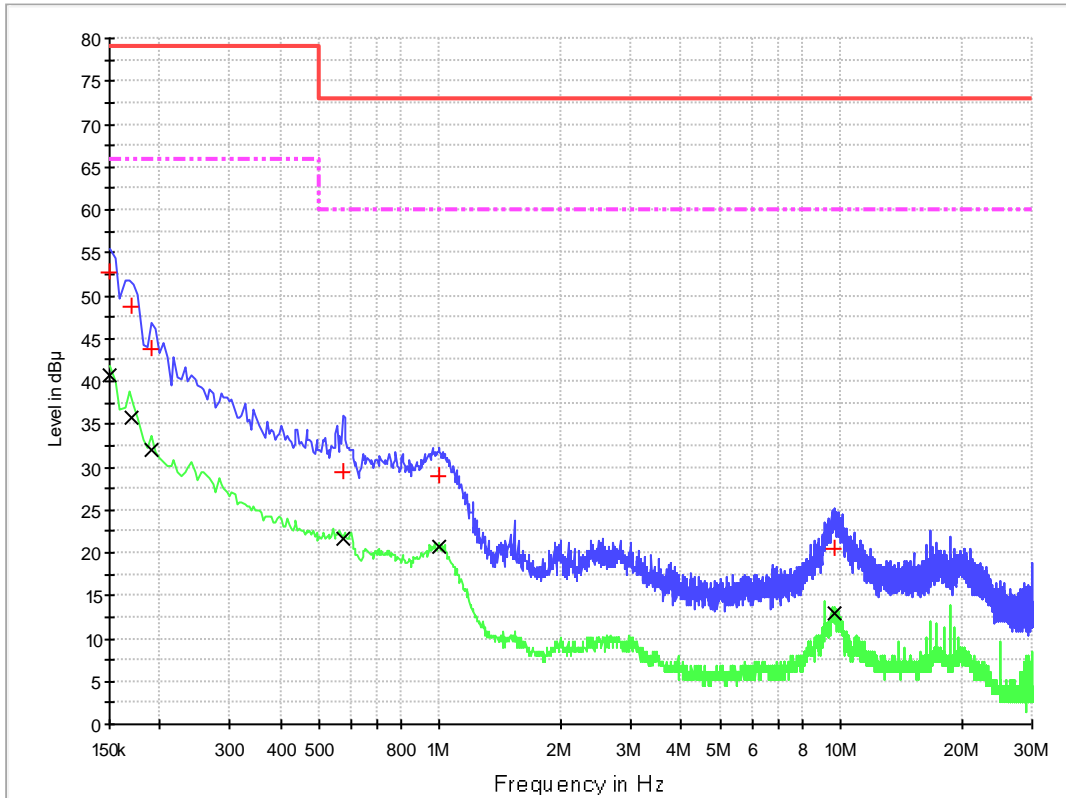


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.150000	52.7	1000.0	9.000	Off	10.0	26.3	79.0
0.170000	48.6	1000.0	9.000	Off	10.0	30.4	79.0
0.190000	43.8	1000.0	9.000	Off	10.0	35.2	79.0
0.574000	29.4	1000.0	9.000	Off	10.0	43.6	73.0
0.998000	29.0	1000.0	9.000	Off	10.0	44.0	73.0
9.602000	20.4	1000.0	9.000	Off	10.0	52.6	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.150000	40.7	1000.0	9.000	Off	10.0	25.3	66.0
0.170000	35.7	1000.0	9.000	Off	10.0	30.3	66.0
0.190000	32.1	1000.0	9.000	Off	10.0	33.9	66.0
0.574000	21.7	1000.0	9.000	Off	10.0	38.3	60.0
0.998000	20.6	1000.0	9.000	Off	10.0	39.4	60.0
9.602000	12.8	1000.0	9.000	Off	10.0	47.2	60.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line Negative (DC input, 230V~/50Hz, Running mode)

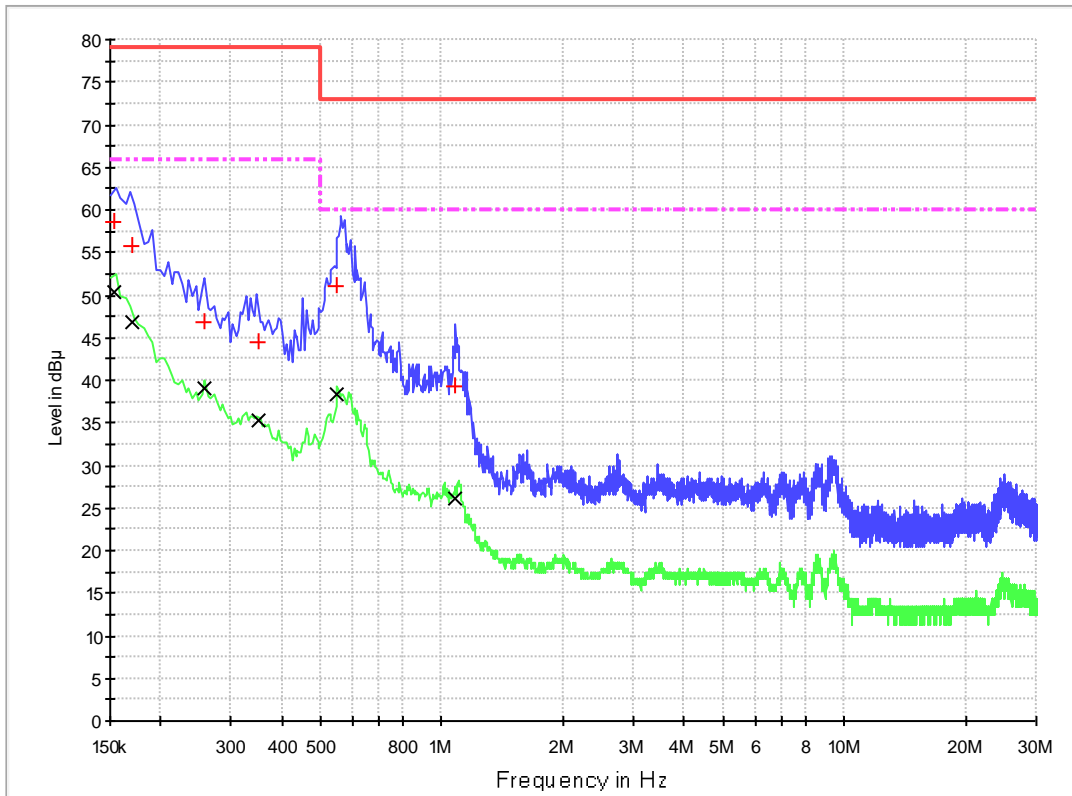


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.154000	58.5	1000.0	9.000	Off	10.0	20.5	79.0
0.170000	55.7	1000.0	9.000	Off	10.0	23.3	79.0
0.258000	46.7	1000.0	9.000	Off	10.0	32.3	79.0
0.350000	44.5	1000.0	9.000	Off	10.0	34.5	79.0
0.550000	51.0	1000.0	9.000	Off	10.0	22.0	73.0
1.082000	39.3	1000.0	9.000	Off	10.0	33.7	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.154000	50.3	1000.0	9.000	Off	10.0	15.7	66.0
0.170000	46.8	1000.0	9.000	Off	10.0	19.2	66.0
0.258000	39.0	1000.0	9.000	Off	10.0	27.0	66.0
0.350000	35.4	1000.0	9.000	Off	10.0	30.6	66.0
0.550000	38.3	1000.0	9.000	Off	10.0	21.7	60.0
1.082000	26.2	1000.0	9.000	Off	10.0	33.8	60.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line Positive (DC output, 110V~/60Hz, Charging mode)

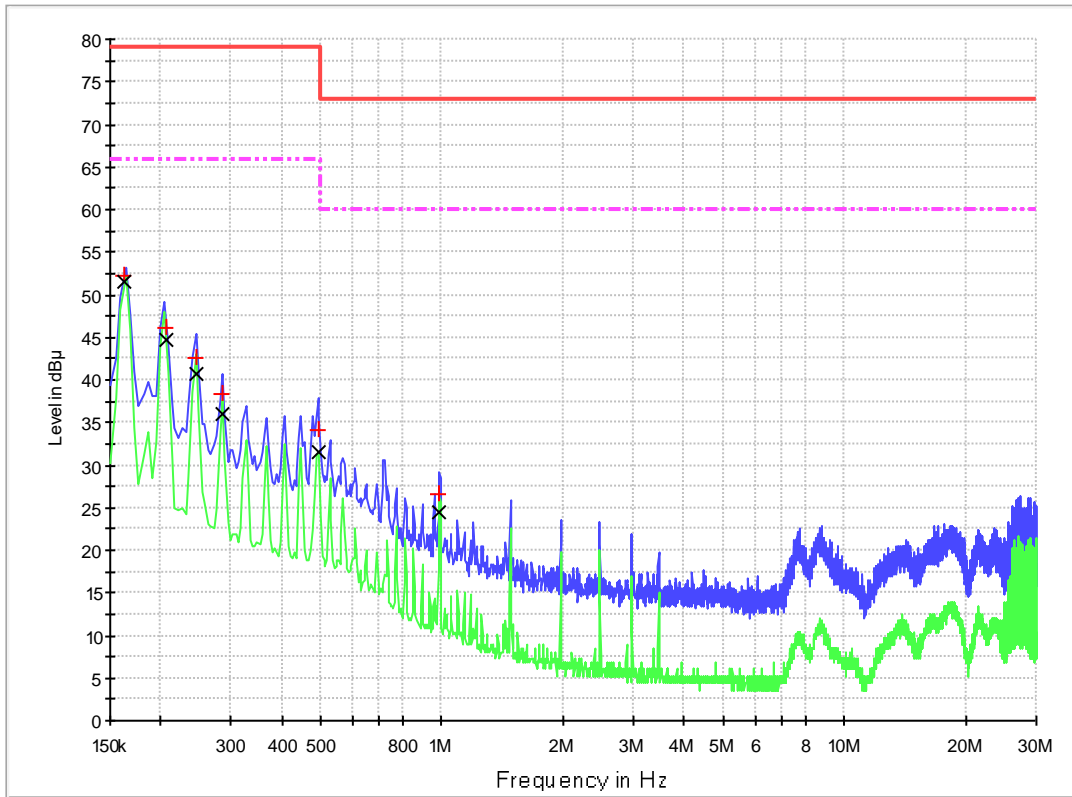


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.162000	52.1	1000.0	9.000	Off	10.0	26.9	79.0
0.206000	46.0	1000.0	9.000	Off	10.0	33.0	79.0
0.246000	42.6	1000.0	9.000	Off	10.0	36.4	79.0
0.286000	38.3	1000.0	9.000	Off	10.0	40.7	79.0
0.494000	34.2	1000.0	9.000	Off	10.0	44.8	79.0
0.986000	26.6	1000.0	9.000	Off	10.0	46.4	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.162000	51.5	1000.0	9.000	Off	10.0	14.5	66.0
0.206000	44.7	1000.0	9.000	Off	10.0	21.3	66.0
0.246000	40.8	1000.0	9.000	Off	10.0	25.2	66.0
0.286000	36.1	1000.0	9.000	Off	10.0	29.9	66.0
0.494000	31.4	1000.0	9.000	Off	10.0	34.6	66.0
0.986000	24.5	1000.0	9.000	Off	10.0	35.5	60.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line Negative (DC output, 110V~/60Hz, Charging mode)

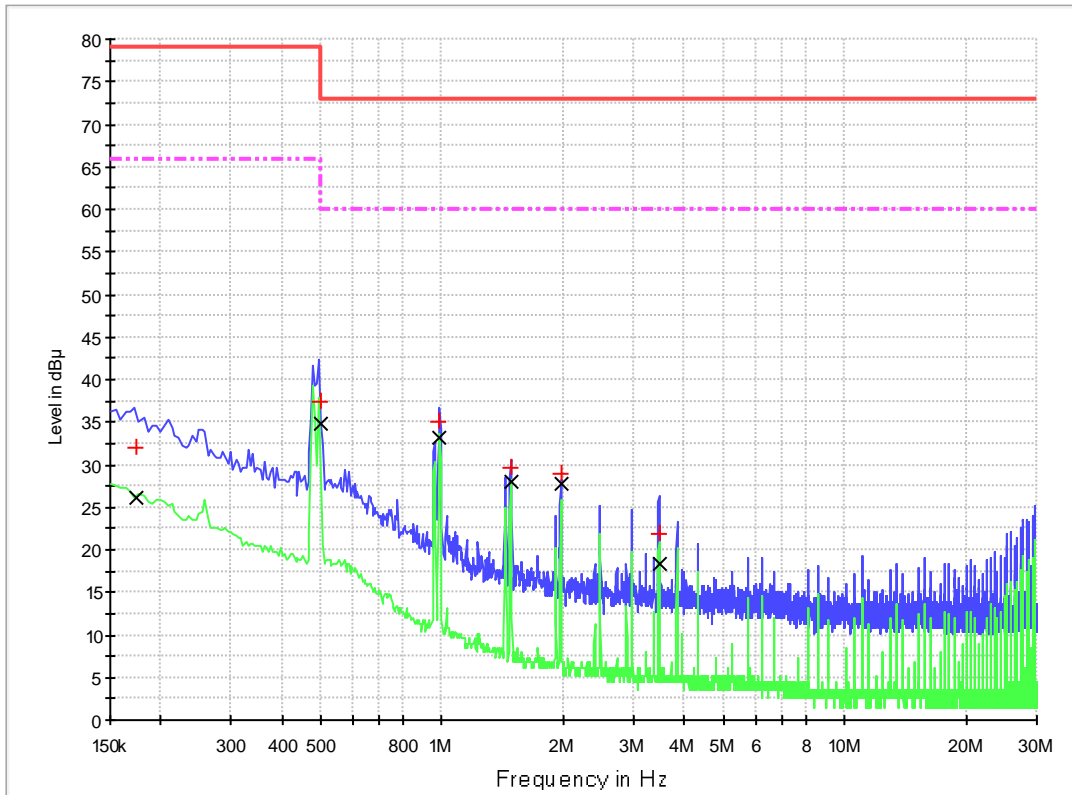


QP

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.174000	31.9	26.0	1000.0	9.000	Off	10.0	47.1	79.0
0.498000	37.3	34.7	1000.0	9.000	Off	10.0	41.7	79.0
0.986000	35.1	33.1	1000.0	9.000	Off	10.0	37.9	73.0
1.482000	29.7	28.0	1000.0	9.000	Off	10.0	43.3	73.0
1.974000	28.8	27.6	1000.0	9.000	Off	10.0	44.2	73.0
3.458000	21.8	18.3	1000.0	9.000	Off	10.0	51.2	73.0

AV

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.174000	31.9	26.0	1000.0	9.000	Off	10.0	40.0	66.0
0.498000	37.3	34.7	1000.0	9.000	Off	10.0	31.3	66.0
0.986000	35.1	33.1	1000.0	9.000	Off	10.0	26.9	60.0
1.482000	29.7	28.0	1000.0	9.000	Off	10.0	32.0	60.0
1.974000	28.8	27.6	1000.0	9.000	Off	10.0	32.4	60.0
3.458000	21.8	18.3	1000.0	9.000	Off	10.0	41.7	60.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line Positive (DC output, 230V~/50Hz, Charging mode)

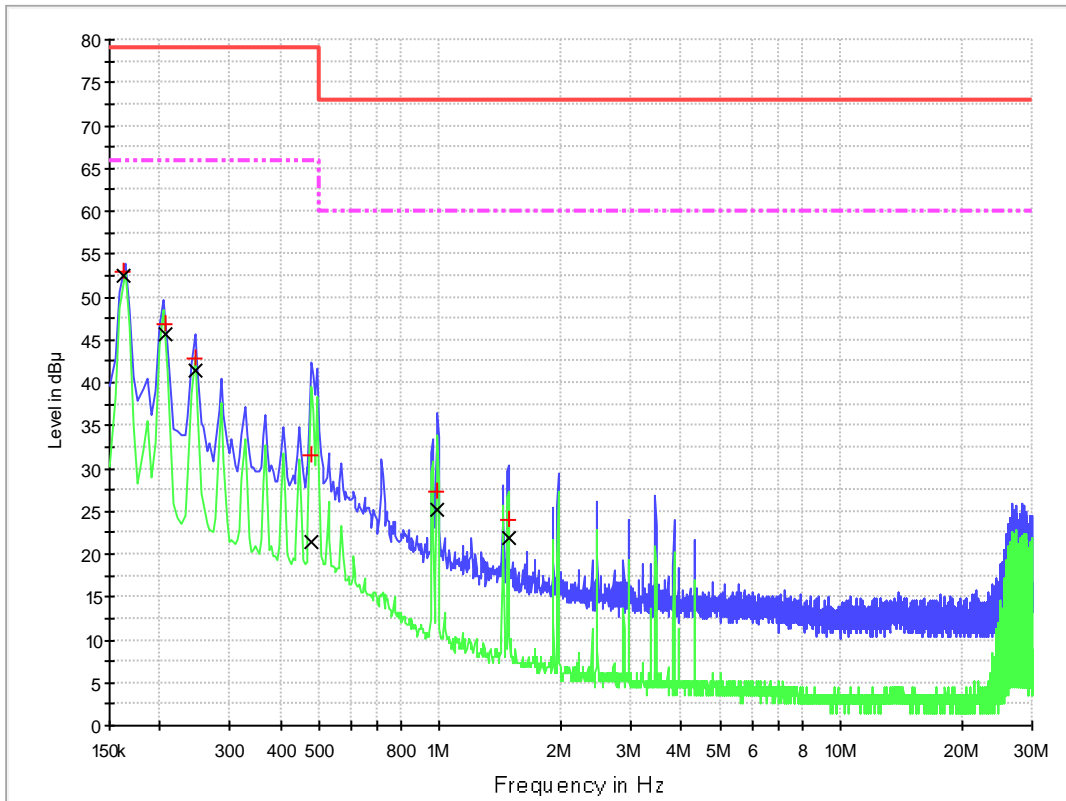


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.162000	53.0	1000.0	9.000	Off	10.0	26.0	79.0
0.206000	46.9	1000.0	9.000	Off	10.0	32.1	79.0
0.246000	42.8	1000.0	9.000	Off	10.0	36.2	79.0
0.478000	31.5	1000.0	9.000	Off	10.0	47.5	79.0
0.986000	27.3	1000.0	9.000	Off	10.0	45.7	73.0
1.482000	24.0	1000.0	9.000	Off	10.0	49.0	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.162000	52.5	1000.0	9.000	Off	10.0	13.5	66.0
0.206000	45.7	1000.0	9.000	Off	10.0	20.3	66.0
0.246000	41.3	1000.0	9.000	Off	10.0	24.7	66.0
0.478000	21.5	1000.0	9.000	Off	10.0	44.5	66.0
0.986000	25.2	1000.0	9.000	Off	10.0	34.8	60.0
1.482000	21.9	1000.0	9.000	Off	10.0	38.1	60.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line Negative (DC output, 230V~/50Hz, Charging mode)

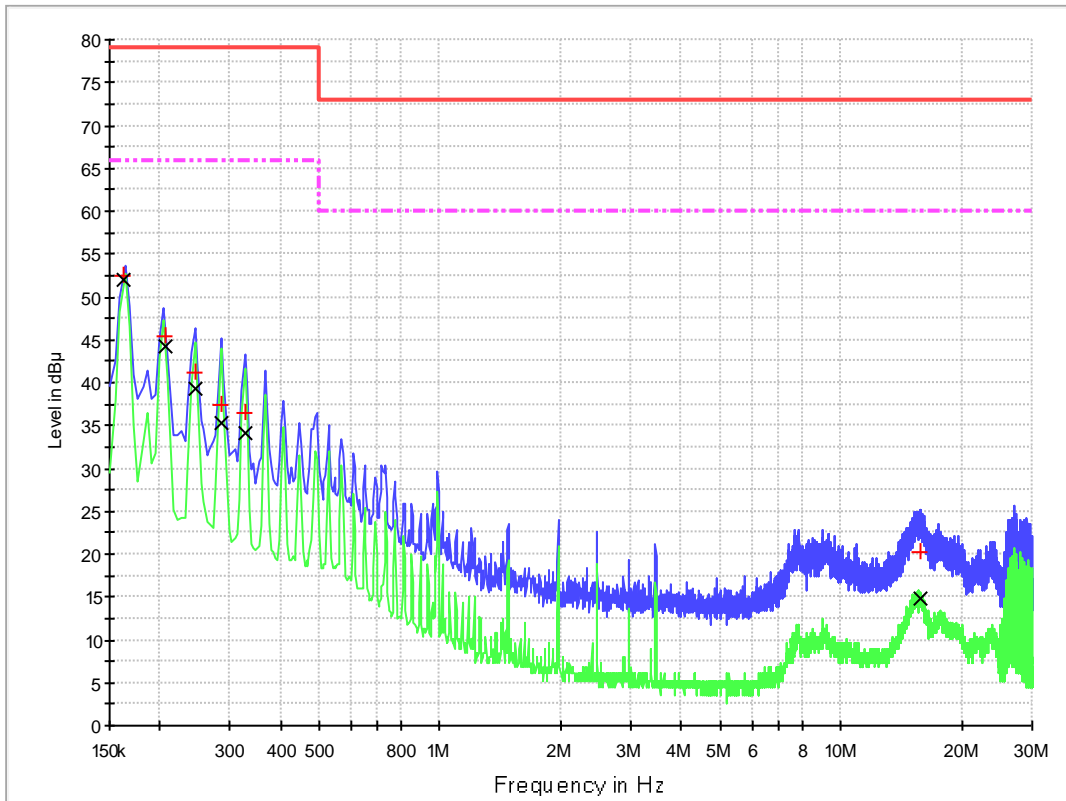


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.162000	52.4	1000.0	9.000	Off	10.0	26.6	79.0
0.206000	45.5	1000.0	9.000	Off	10.0	33.5	79.0
0.246000	41.2	1000.0	9.000	Off	10.0	37.8	79.0
0.286000	37.5	1000.0	9.000	Off	10.0	41.5	79.0
0.326000	36.5	1000.0	9.000	Off	10.0	42.5	79.0
15.738000	20.1	1000.0	9.000	Off	10.0	52.9	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.162000	52.0	1000.0	9.000	Off	10.0	14.0	66.0
0.206000	44.3	1000.0	9.000	Off	10.0	21.7	66.0
0.246000	39.4	1000.0	9.000	Off	10.0	26.6	66.0
0.286000	35.3	1000.0	9.000	Off	10.0	30.7	66.0
0.326000	34.1	1000.0	9.000	Off	10.0	31.9	66.0
15.738000	14.9	1000.0	9.000	Off	10.0	45.1	60.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test (DC output, 110V~/60Hz, Running mode)

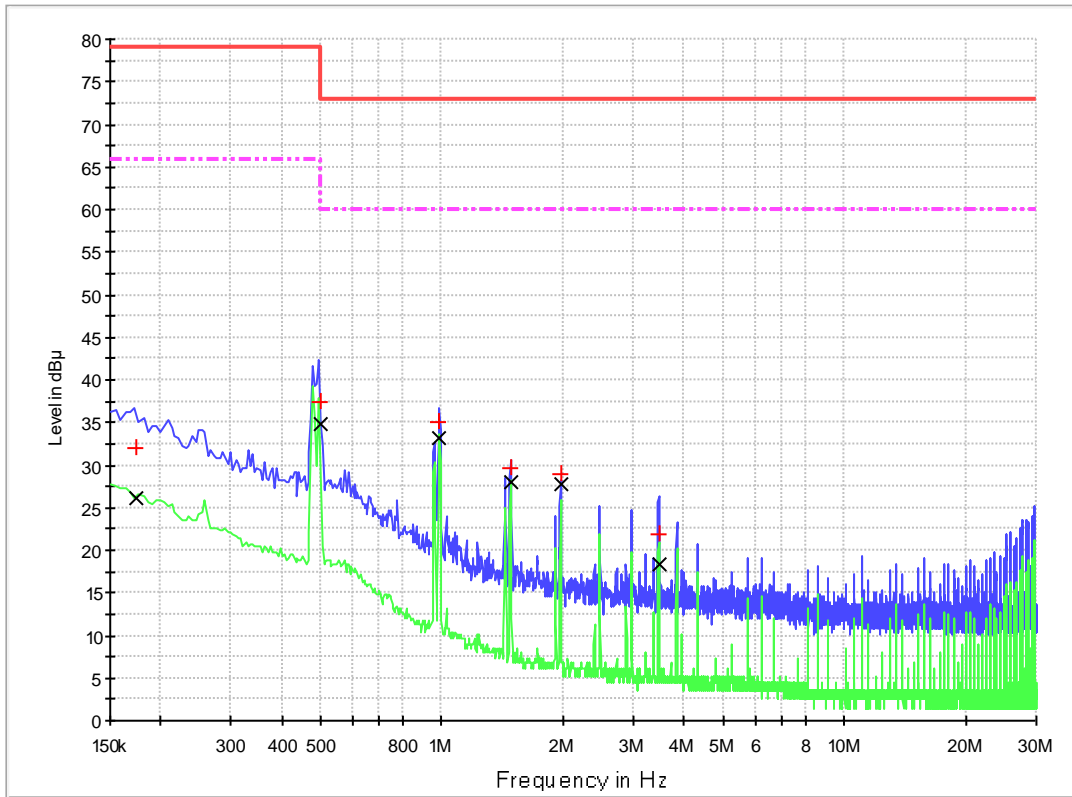


QP

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.174000	31.9	26.0	1000.0	9.000	Off	10.0	47.1	79.0
0.498000	37.3	34.7	1000.0	9.000	Off	10.0	41.7	79.0
0.986000	35.1	33.1	1000.0	9.000	Off	10.0	37.9	73.0
1.482000	29.7	28.0	1000.0	9.000	Off	10.0	43.3	73.0
1.974000	28.8	27.6	1000.0	9.000	Off	10.0	44.2	73.0
3.458000	21.8	18.3	1000.0	9.000	Off	10.0	51.2	73.0

AV

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.174000	31.9	26.0	1000.0	9.000	Off	10.0	40.0	66.0
0.498000	37.3	34.7	1000.0	9.000	Off	10.0	31.3	66.0
0.986000	35.1	33.1	1000.0	9.000	Off	10.0	26.9	60.0
1.482000	29.7	28.0	1000.0	9.000	Off	10.0	32.0	60.0
1.974000	28.8	27.6	1000.0	9.000	Off	10.0	32.4	60.0
3.458000	21.8	18.3	1000.0	9.000	Off	10.0	41.7	60.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line Negative (DC output, 110V~/60Hz, Running mode)

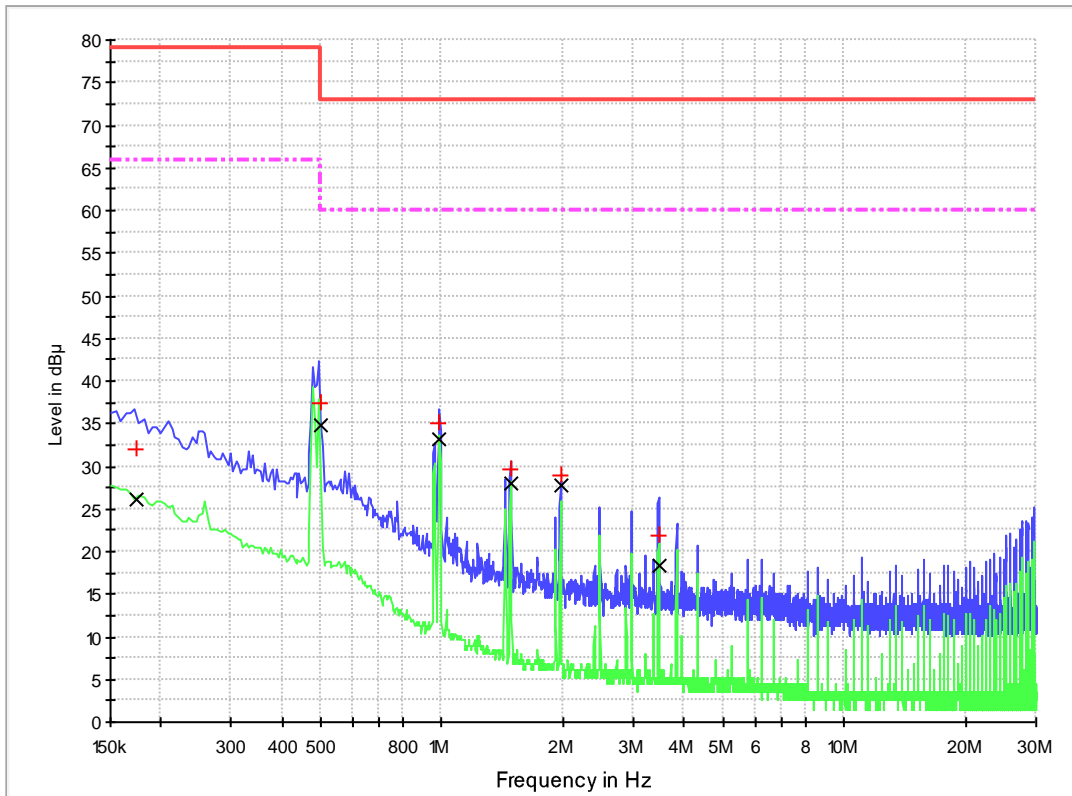


QP

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.174000	31.9	26.0	1000.0	9.000	Off	10.0	47.1	79.0
0.498000	37.3	34.7	1000.0	9.000	Off	10.0	41.7	79.0
0.986000	35.1	33.1	1000.0	9.000	Off	10.0	37.9	73.0
1.482000	29.7	28.0	1000.0	9.000	Off	10.0	43.3	73.0
1.974000	28.8	27.6	1000.0	9.000	Off	10.0	44.2	73.0
3.458000	21.8	18.3	1000.0	9.000	Off	10.0	51.2	73.0

AV

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.174000	31.9	26.0	1000.0	9.000	Off	10.0	40.0	66.0
0.498000	37.3	34.7	1000.0	9.000	Off	10.0	31.3	66.0
0.986000	35.1	33.1	1000.0	9.000	Off	10.0	26.9	60.0
1.482000	29.7	28.0	1000.0	9.000	Off	10.0	32.0	60.0
1.974000	28.8	27.6	1000.0	9.000	Off	10.0	32.4	60.0
3.458000	21.8	18.3	1000.0	9.000	Off	10.0	41.7	60.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line Positive (DC output, 230V~/50Hz, Running mode)

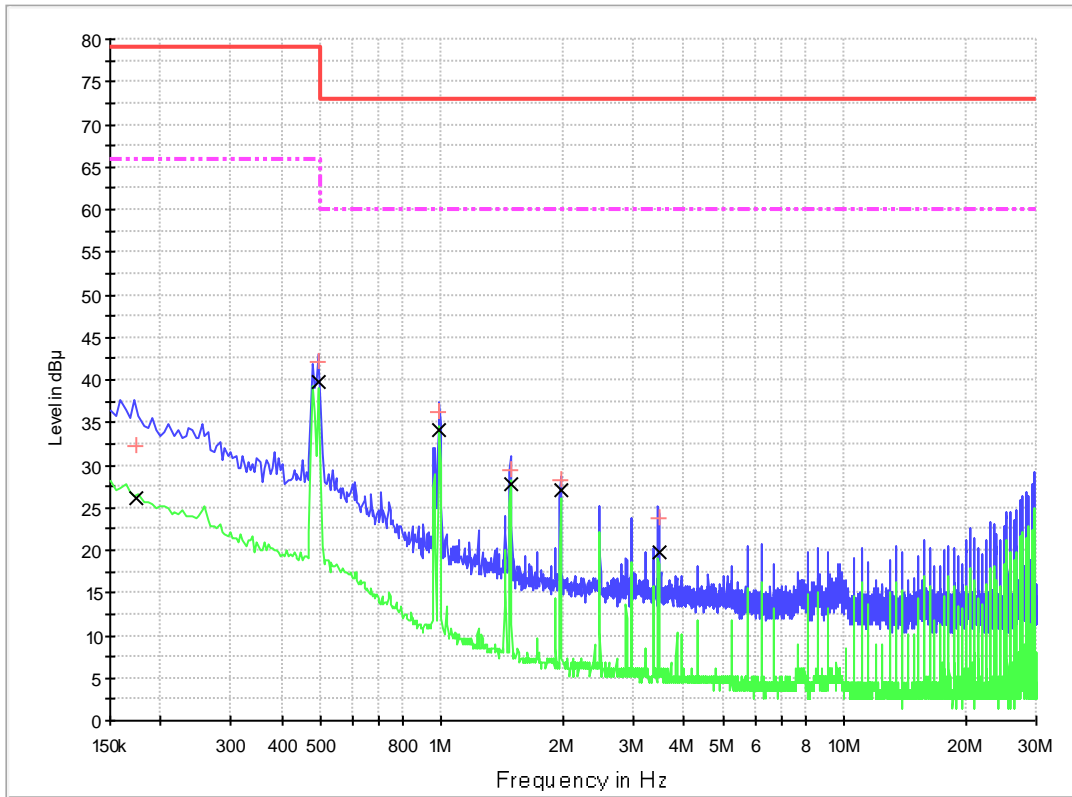


QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.174000	32.2	1000.0	9.000	Off	10.0	46.8	79.0
0.494000	42.1	1000.0	9.000	Off	10.0	36.9	79.0
0.986000	36.2	1000.0	9.000	Off	10.0	36.8	73.0
1.482000	29.4	1000.0	9.000	Off	10.0	43.6	73.0
1.974000	28.3	1000.0	9.000	Off	10.0	44.7	73.0
3.454000	23.8	1000.0	9.000	Off	10.0	49.2	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.174000	26.1	1000.0	9.000	Off	10.0	39.9	66.0
0.494000	39.9	1000.0	9.000	Off	10.0	26.1	66.0
0.986000	34.2	1000.0	9.000	Off	10.0	25.8	60.0
1.482000	27.7	1000.0	9.000	Off	10.0	32.3	60.0
1.974000	27.0	1000.0	9.000	Off	10.0	33.0	60.0
3.454000	19.9	1000.0	9.000	Off	10.0	40.1	60.0

For adaptor: adapter 3_FY2401500S3, Wi-Fi mode
 Line Under Test: Line Negative (DC output, 230V~/50Hz, Running mode)

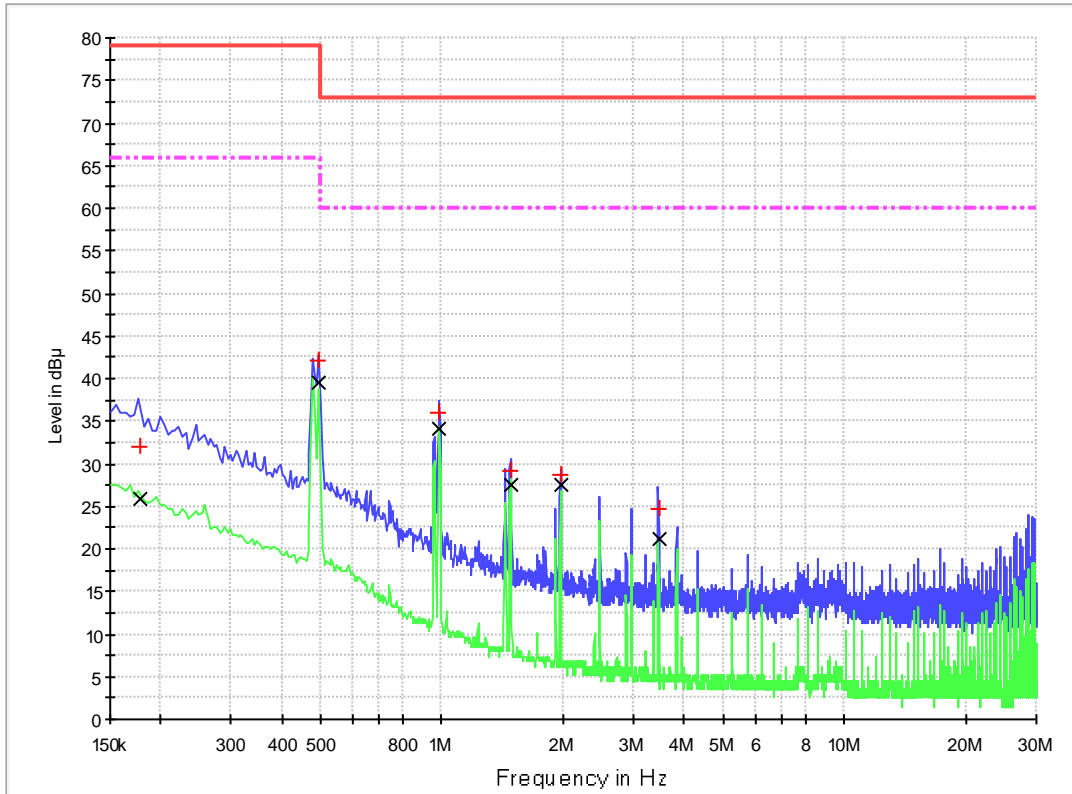

QP

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)
0.178000	32.0	1000.0	9.000	Off	10.0	47.0	79.0
0.494000	42.2	1000.0	9.000	Off	10.0	36.8	79.0
0.986000	35.9	1000.0	9.000	Off	10.0	37.1	73.0
1.482000	29.2	1000.0	9.000	Off	10.0	43.8	73.0
1.974000	28.8	1000.0	9.000	Off	10.0	44.2	73.0
3.454000	24.8	1000.0	9.000	Off	10.0	48.2	73.0

AV

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)
0.178000	25.9	1000.0	9.000	Off	10.0	40.1	66.0
0.494000	39.6	1000.0	9.000	Off	10.0	26.4	66.0
0.986000	34.1	1000.0	9.000	Off	10.0	25.9	60.0
1.482000	27.6	1000.0	9.000	Off	10.0	32.4	60.0
1.974000	27.5	1000.0	9.000	Off	10.0	32.5	60.0
3.454000	21.2	1000.0	9.000	Off	10.0	38.8	60.0



Test Setup

2.2.8 Test Location

This test was carried out in shielded room C.

2.3 Harmonic current emissions (AC Power Port)

2.3.1 Specification Reference

EN 61000-3-2:2014 & EN IEC 61000-3-2:2019, Clause 6

2.3.2 Equipment Under Test

LLS BL300i/YG (Remark: EUT with Wi-Fi) , LLS BL300B/YG (Remark: EUT with BLE)


2.3.3 Date of Test

10/11/2021-13/11/2021

2.3.4 Test Method

Harmonic current test should be conducted with the user's operation control or automatic programs set to the mode expected to produce the maximum total harmonic current under normal operating conditions.

Specific test conditions for the measurement of harmonic currents associated with some types of equipment are given in Annex C.

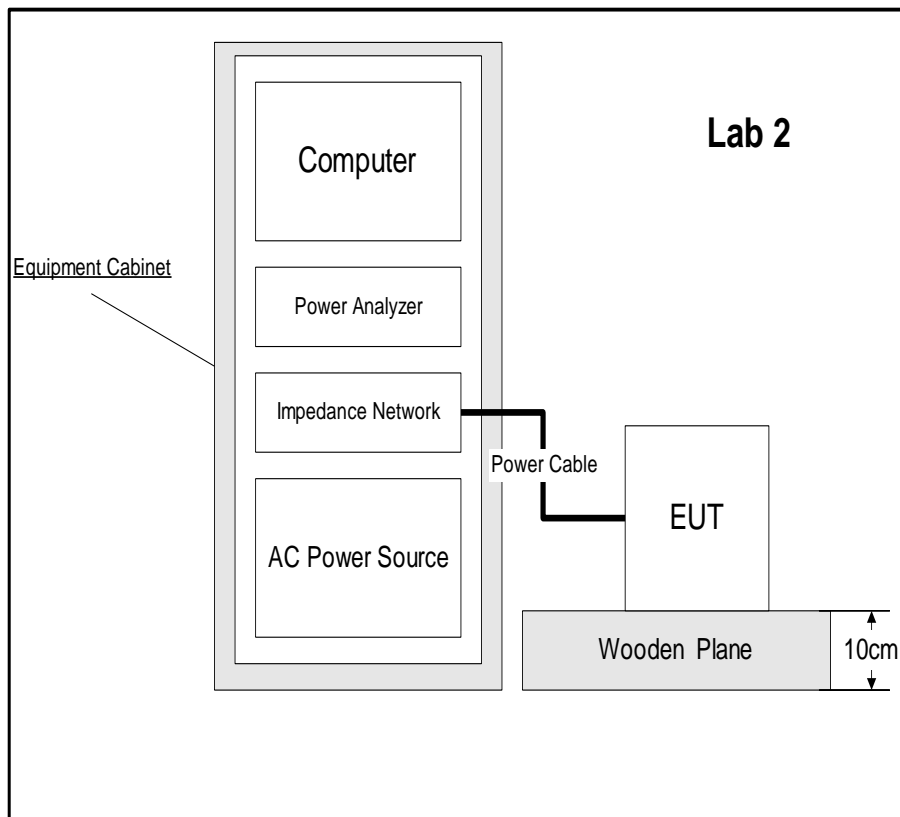



2.3.5 Environmental Conditions

Ambient Temperature 20.2 °C
 Relative Humidity 55.5 %
 Atmospheric Pressure 1010.2 mbar

2.3.6 Specification Limits

Limits for class A Equipment	
Harmonic order n	Maximum permissible harmonic current A
Odd harmonics	
3	2.30
5	1.14
7	0.77
9	0.40
11	0.33
13	0.21
15 ≤ n ≤ 39	0.15(15/n)
Even harmonics	
2	1.08
4	0.43
6	0.30
8 ≤ n ≤ 40	0.23(8/n)

2.3.7 Test Results

Results for Configuration and Mode: AC Powered/Power on (Charging mode/running mode)

Performance assessment of the EUT made during this test: *Pass*.

Detailed results are shown below.


Classification of EUT: Class A

For adaptor: adapter 1_FY2401500S1


BLE mode, charging mode

Test Result: Pass Source qualification: Normal

Current & voltage waveforms

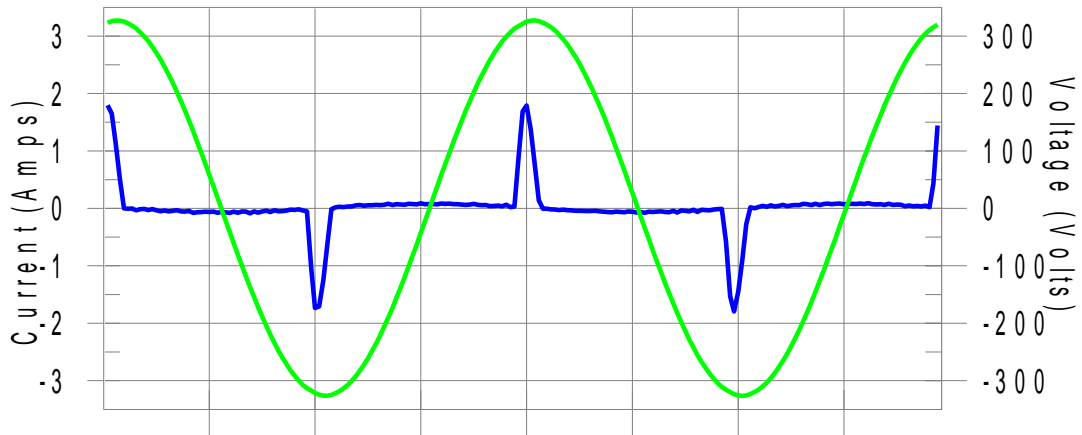

Harmonics and Class A limit line European Limits

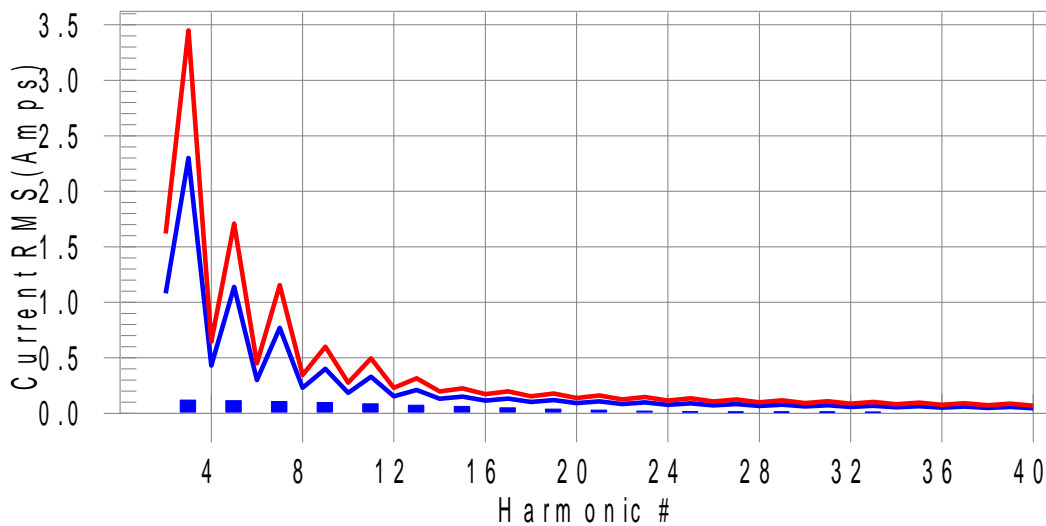

Test result: Pass Worst harmonics H15-37.2% of 150% limit, H15-40.9% of 100% limit.



Test Result: Pass Source qualification: Normal
 THC(A): 0.265 I-THD(%): 139.2 POHC(A): 0.046 POHC Limit(A): 0.251

Highest parameter values during test:

V_RMS (Volts): 230.704 Frequency(Hz): 50.00
 I_Peak (Amps): 1.851 I_RMS (Amps): 0.423
 I_Fund (Amps): 0.191 Crest Factor: 8.885
 Power (Watts): 41.1 Power Factor: 0.425


Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.002	1.080	N/A	0.003	1.620	N/A	Pass
3	0.119	2.300	5.2	0.174	3.450	5.0	Pass
4	0.002	0.430	N/A	0.003	0.645	N/A	Pass
5	0.114	1.140	10.0	0.166	1.710	9.7	Pass
6	0.002	0.300	N/A	0.002	0.450	N/A	Pass
7	0.106	0.770	13.8	0.154	1.155	13.3	Pass
8	0.002	0.230	N/A	0.002	0.345	N/A	Pass
9	0.097	0.400	24.2	0.139	0.600	23.1	Pass
10	0.002	0.184	N/A	0.002	0.276	N/A	Pass
11	0.085	0.330	25.9	0.121	0.495	24.5	Pass
12	0.002	0.153	N/A	0.002	0.230	N/A	Pass
13	0.074	0.210	35.0	0.103	0.315	32.6	Pass
14	0.002	0.131	N/A	0.002	0.197	N/A	Pass
15	0.061	0.150	40.9	0.084	0.225	37.2	Pass
16	0.002	0.115	N/A	0.002	0.173	N/A	Pass
17	0.049	0.132	37.4	0.065	0.198	33.0	Pass
18	0.002	0.102	N/A	0.002	0.153	N/A	Pass
19	0.038	0.118	32.2	0.048	0.178	27.2	Pass
20	0.001	0.092	N/A	0.002	0.138	N/A	Pass
21	0.028	0.107	26.3	0.034	0.161	20.9	Pass
22	0.001	0.084	N/A	0.001	0.125	N/A	Pass
23	0.020	0.098	20.5	0.022	0.147	14.9	Pass
24	0.001	0.077	N/A	0.001	0.115	N/A	Pass
25	0.014	0.090	16.1	0.016	0.135	12.1	Pass
26	0.001	0.071	N/A	0.001	0.107	N/A	Pass
27	0.012	0.083	14.6	0.013	0.125	10.7	Pass
28	0.001	0.066	N/A	0.001	0.099	N/A	Pass
29	0.012	0.078	15.2	0.013	0.116	11.4	Pass
30	0.001	0.061	N/A	0.001	0.092	N/A	Pass
31	0.011	0.073	15.8	0.014	0.109	13.2	Pass
32	0.001	0.058	N/A	0.001	0.086	N/A	Pass
33	0.011	0.068	15.4	0.014	0.102	13.6	Pass
34	0.001	0.054	N/A	0.002	0.081	N/A	Pass
35	0.009	0.064	13.9	0.013	0.096	13.0	Pass
36	0.002	0.051	N/A	0.003	0.077	N/A	Pass
37	0.007	0.061	12.0	0.011	0.091	11.8	Pass
38	0.007	0.048	13.8	0.007	0.073	9.6	Pass
39	0.005	0.058	N/A	0.008	0.087	N/A	Pass
40	0.002	0.046	N/A	0.003	0.069	N/A	Pass

For adaptor: adapter 1_FY2401500S1

Wi-Fi mode, charging


Test Result: Pass Source qualification: Normal

Current & voltage waveforms

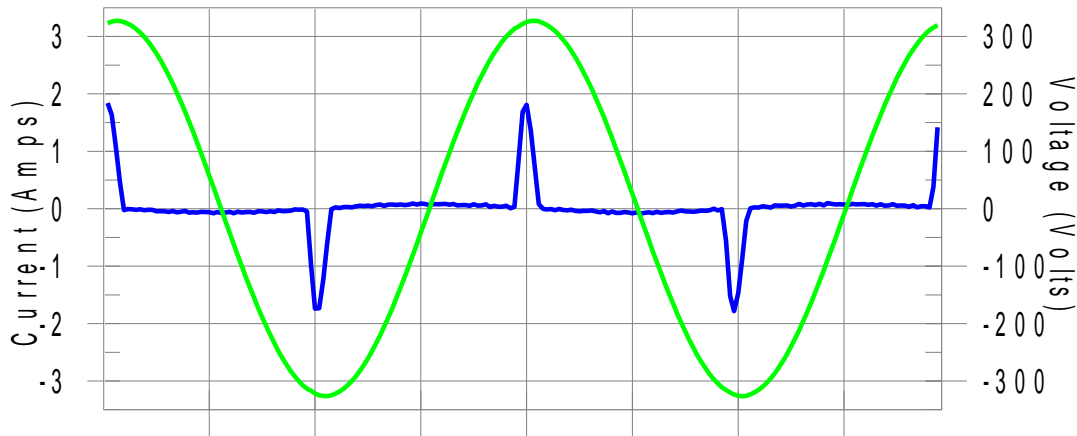

Harmonics and Class A limit line

European Limits

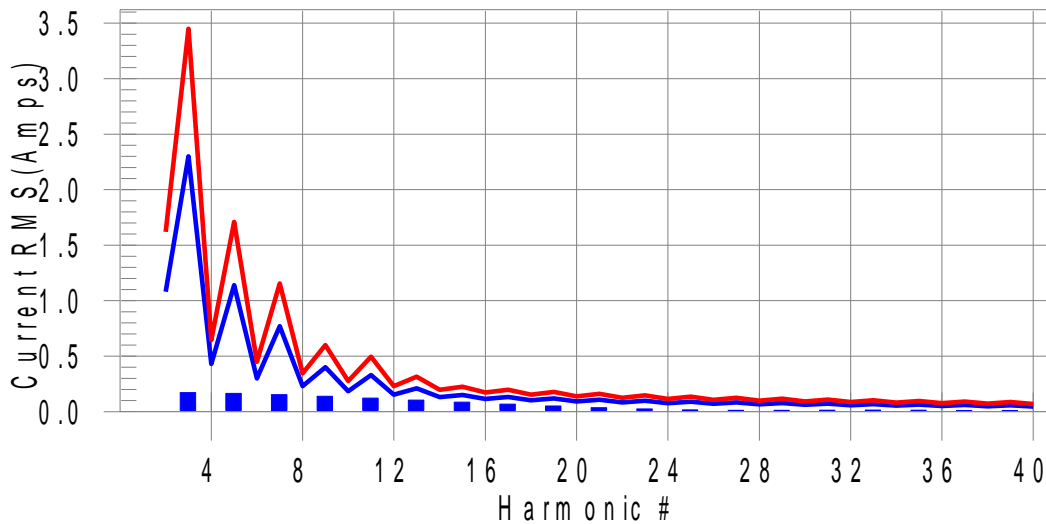

Test result: Pass Worst harmonics H15-38.4% of 150% limit, H15-57.1% of 100% limit.



Test Result: Pass Source qualification: Normal
 THC(A): 0.378 I-THD(%): 199.3 POHC(A): 0.057 POHC Limit(A): 0.251

Highest parameter values during test:

V_RMS (Volts):	230.709	Frequency(Hz):	50.00
I_Peak (Amps):	1.893	I_RMS (Amps):	0.423
I_Fund (Amps):	0.189	Crest Factor:	4.482
Power (Watts):	40.8	Power Factor:	0.420


Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.002	1.080	N/A	0.003	1.620	N/A	Pass
3	0.172	2.300	7.5	0.173	3.450	5.0	Pass
4	0.002	0.430	N/A	0.002	0.645	N/A	Pass
5	0.164	1.140	14.4	0.165	1.710	9.6	Pass
6	0.002	0.300	N/A	0.002	0.450	N/A	Pass
7	0.153	0.770	19.8	0.153	1.155	13.3	Pass
8	0.002	0.230	N/A	0.002	0.345	N/A	Pass
9	0.138	0.400	34.6	0.139	0.600	23.2	Pass
10	0.002	0.184	N/A	0.002	0.276	N/A	Pass
11	0.122	0.330	36.9	0.123	0.495	24.7	Pass
12	0.002	0.153	N/A	0.002	0.230	N/A	Pass
13	0.104	0.210	49.5	0.105	0.315	33.3	Pass
14	0.002	0.131	N/A	0.002	0.197	N/A	Pass
15	0.086	0.150	57.1	0.086	0.225	38.4	Pass
16	0.002	0.115	N/A	0.002	0.173	N/A	Pass
17	0.068	0.132	51.4	0.069	0.198	34.7	Pass
18	0.002	0.102	N/A	0.002	0.153	N/A	Pass
19	0.051	0.118	43.2	0.052	0.178	29.3	Pass
20	0.002	0.092	N/A	0.002	0.138	N/A	Pass
21	0.036	0.107	33.9	0.037	0.161	23.1	Pass
22	0.001	0.084	N/A	0.001	0.125	N/A	Pass
23	0.024	0.098	24.7	0.025	0.147	17.0	Pass
24	0.001	0.077	N/A	0.001	0.115	N/A	Pass
25	0.016	0.090	17.4	0.016	0.135	11.9	Pass
26	0.001	0.071	N/A	0.001	0.107	N/A	Pass
27	0.012	0.083	14.4	0.012	0.125	9.7	Pass
28	0.001	0.066	N/A	0.001	0.099	N/A	Pass
29	0.012	0.078	15.8	0.012	0.116	10.7	Pass
30	0.001	0.061	N/A	0.001	0.092	N/A	Pass
31	0.013	0.073	18.4	0.014	0.109	12.4	Pass
32	0.001	0.058	N/A	0.001	0.086	N/A	Pass
33	0.014	0.068	20.0	0.014	0.102	13.5	Pass
34	0.001	0.054	N/A	0.001	0.081	N/A	Pass
35	0.013	0.064	19.8	0.013	0.096	13.3	Pass
36	0.001	0.051	N/A	0.001	0.077	N/A	Pass
37	0.011	0.061	17.9	0.011	0.091	12.2	Pass
38	0.002	0.048	N/A	0.003	0.073	N/A	Pass
39	0.010	0.058	18.2	0.011	0.087	12.4	Pass
40	0.001	0.046	N/A	0.001	0.069	N/A	Pass

For adaptor: adapter 2_FY2401500S2


BLE mode, charging

Test Result: Pass Source qualification: Normal

Current & voltage waveforms

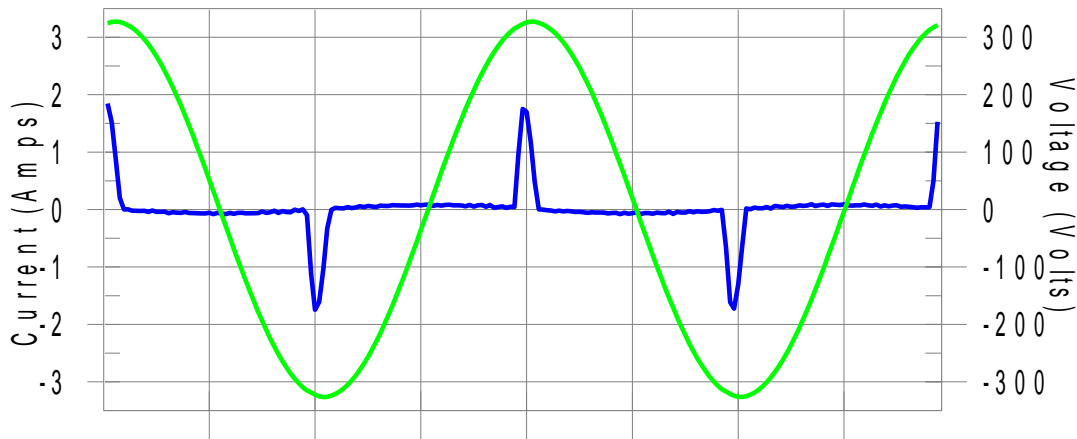

Harmonics and Class A limit line European Limits

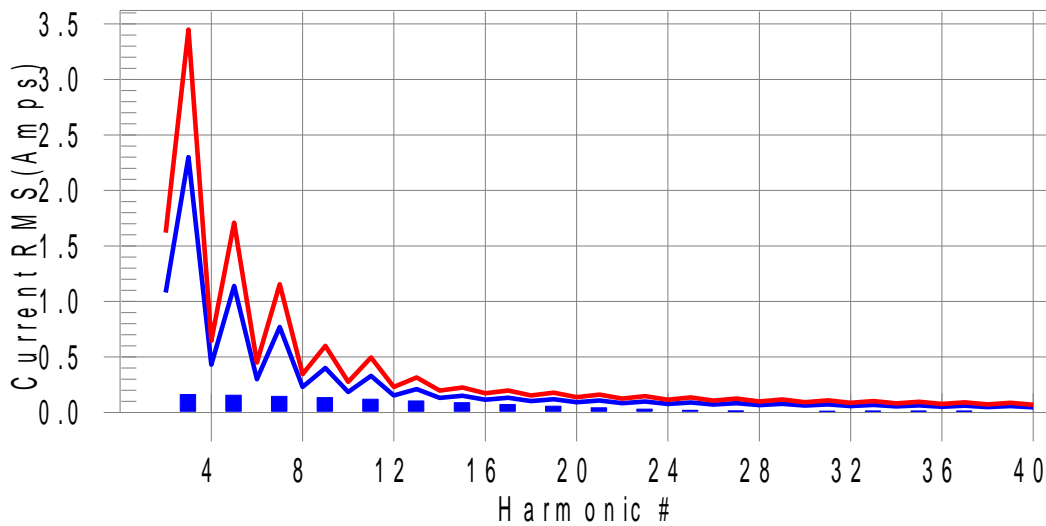

Test result: Pass Worst harmonics H15-39.1% of 150% limit, H15-58.4% of 100% limit.



Test Result: Pass Source qualification: Normal
 THC(A): 0.366 I-THD(%): 205.6 POHC(A): 0.062 POHC Limit(A): 0.251

Highest parameter values during test:

V_RMS (Volts): 230.696 Frequency(Hz): 50.00
 I_Peak (Amps): 1.868 I_RMS (Amps): 0.407
 I_Fund (Amps): 0.178 Crest Factor: 4.600
 Power (Watts): 38.1 Power Factor: 0.408


Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.002	1.080	N/A	0.003	1.620	N/A	Pass
3	0.162	2.300	7.0	0.163	3.450	4.7	Pass
4	0.002	0.430	N/A	0.002	0.645	N/A	Pass
5	0.155	1.140	13.6	0.155	1.710	9.1	Pass
6	0.002	0.300	N/A	0.002	0.450	N/A	Pass
7	0.145	0.770	18.9	0.145	1.155	12.6	Pass
8	0.002	0.230	N/A	0.002	0.345	N/A	Pass
9	0.133	0.400	33.3	0.134	0.600	22.3	Pass
10	0.002	0.184	N/A	0.002	0.276	N/A	Pass
11	0.119	0.330	36.0	0.119	0.495	24.1	Pass
12	0.002	0.153	N/A	0.002	0.230	N/A	Pass
13	0.104	0.210	49.4	0.104	0.315	33.0	Pass
14	0.002	0.131	N/A	0.002	0.197	N/A	Pass
15	0.088	0.150	58.4	0.088	0.225	39.1	Pass
16	0.002	0.115	N/A	0.002	0.173	N/A	Pass
17	0.072	0.132	54.2	0.072	0.198	36.3	Pass
18	0.002	0.102	N/A	0.002	0.153	N/A	Pass
19	0.056	0.118	47.4	0.056	0.178	31.8	Pass
20	0.002	0.092	N/A	0.002	0.138	N/A	Pass
21	0.042	0.107	39.2	0.042	0.161	26.4	Pass
22	0.001	0.084	N/A	0.002	0.125	N/A	Pass
23	0.030	0.098	30.3	0.030	0.147	20.4	Pass
24	0.001	0.077	N/A	0.001	0.115	N/A	Pass
25	0.020	0.090	21.8	0.020	0.135	14.8	Pass
26	0.001	0.071	N/A	0.001	0.107	N/A	Pass
27	0.013	0.083	15.3	0.013	0.125	10.4	Pass
28	0.001	0.066	N/A	0.001	0.099	N/A	Pass
29	0.010	0.078	12.9	0.010	0.116	8.7	Pass
30	0.001	0.061	N/A	0.001	0.092	N/A	Pass
31	0.010	0.073	14.4	0.011	0.109	9.9	Pass
32	0.001	0.058	N/A	0.001	0.086	N/A	Pass
33	0.012	0.068	16.9	0.012	0.102	11.4	Pass
34	0.001	0.054	N/A	0.001	0.081	N/A	Pass
35	0.012	0.064	18.4	0.012	0.096	12.6	Pass
36	0.002	0.051	N/A	0.002	0.077	N/A	Pass
37	0.011	0.061	18.9	0.014	0.091	15.3	Pass
38	0.006	0.048	13.1	0.007	0.073	9.3	Pass
39	0.010	0.058	17.4	0.011	0.087	12.6	Pass
40	0.002	0.046	N/A	0.002	0.069	N/A	Pass

For adaptor: adapter 2_FY2401500S2


Wi-Fi mode, charging

Test Result: Pass Source qualification: Normal

Current & voltage waveforms

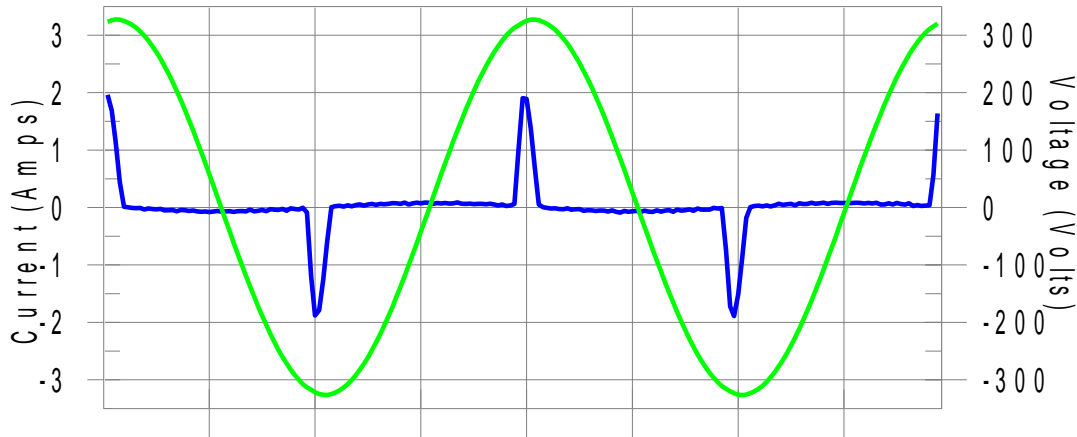

Harmonics and Class A limit line European Limits

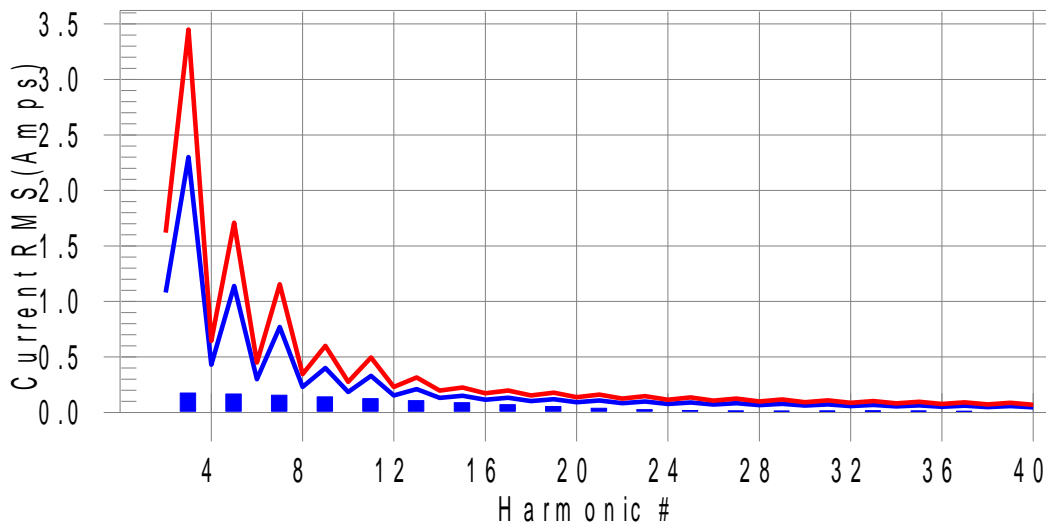

Test result: Pass Worst harmonics H15-40.2% of 150% limit, H15-58.8% of 100% limit.



Test Result: Pass Source qualification: Normal
 THC(A): 0.386 I-THD(%): 194.3 POHC(A): 0.059 POHC Limit(A): 0.251

Highest parameter values during test:

V_RMS (Volts): 230.701 Frequency(Hz): 50.00
 I_Peak (Amps): 1.988 I_RMS (Amps): 0.450
 I_Fund (Amps): 0.198 Crest Factor: 4.577
 Power (Watts): 42.9 Power Factor: 0.421


Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.002	1.080	N/A	0.003	1.620	N/A	Pass
3	0.175	2.300	7.6	0.182	3.450	5.3	Pass
4	0.002	0.430	N/A	0.002	0.645	N/A	Pass
5	0.167	1.140	14.7	0.174	1.710	10.2	Pass
6	0.002	0.300	N/A	0.002	0.450	N/A	Pass
7	0.156	0.770	20.2	0.161	1.155	14.0	Pass
8	0.002	0.230	N/A	0.002	0.345	N/A	Pass
9	0.141	0.400	35.3	0.146	0.600	24.4	Pass
10	0.002	0.184	N/A	0.002	0.276	N/A	Pass
11	0.124	0.330	37.7	0.129	0.495	26.0	Pass
12	0.002	0.153	N/A	0.002	0.230	N/A	Pass
13	0.107	0.210	50.8	0.110	0.315	34.9	Pass
14	0.002	0.131	N/A	0.002	0.197	N/A	Pass
15	0.088	0.150	58.8	0.090	0.225	40.2	Pass
16	0.002	0.115	N/A	0.002	0.173	N/A	Pass
17	0.070	0.132	53.1	0.072	0.198	36.1	Pass
18	0.002	0.102	N/A	0.002	0.153	N/A	Pass
19	0.053	0.118	44.9	0.054	0.178	30.4	Pass
20	0.002	0.092	N/A	0.002	0.138	N/A	Pass
21	0.038	0.107	35.6	0.039	0.161	24.3	Pass
22	0.001	0.084	N/A	0.001	0.125	N/A	Pass
23	0.026	0.098	26.3	0.027	0.147	18.7	Pass
24	0.001	0.077	N/A	0.001	0.115	N/A	Pass
25	0.017	0.090	18.8	0.018	0.135	13.3	Pass
26	0.001	0.071	N/A	0.001	0.107	N/A	Pass
27	0.013	0.083	15.2	0.013	0.125	10.6	Pass
28	0.001	0.066	N/A	0.001	0.099	N/A	Pass
29	0.012	0.078	16.0	0.014	0.116	11.6	Pass
30	0.001	0.061	N/A	0.001	0.092	N/A	Pass
31	0.013	0.073	18.3	0.014	0.109	13.2	Pass
32	0.001	0.058	N/A	0.001	0.086	N/A	Pass
33	0.014	0.068	20.0	0.014	0.102	14.0	Pass
34	0.001	0.054	N/A	0.001	0.081	N/A	Pass
35	0.013	0.064	19.9	0.013	0.096	13.8	Pass
36	0.002	0.051	N/A	0.002	0.077	N/A	Pass
37	0.011	0.061	18.4	0.011	0.091	12.6	Pass
38	0.007	0.048	13.6	0.007	0.073	9.2	Pass
39	0.009	0.058	14.9	0.009	0.087	10.9	Pass
40	0.002	0.046	N/A	0.002	0.069	N/A	Pass

For adaptor: adapter 3_ FY2401500S3

BLE mode, charging


Test Result: Pass Source qualification: Normal

Current & voltage waveforms

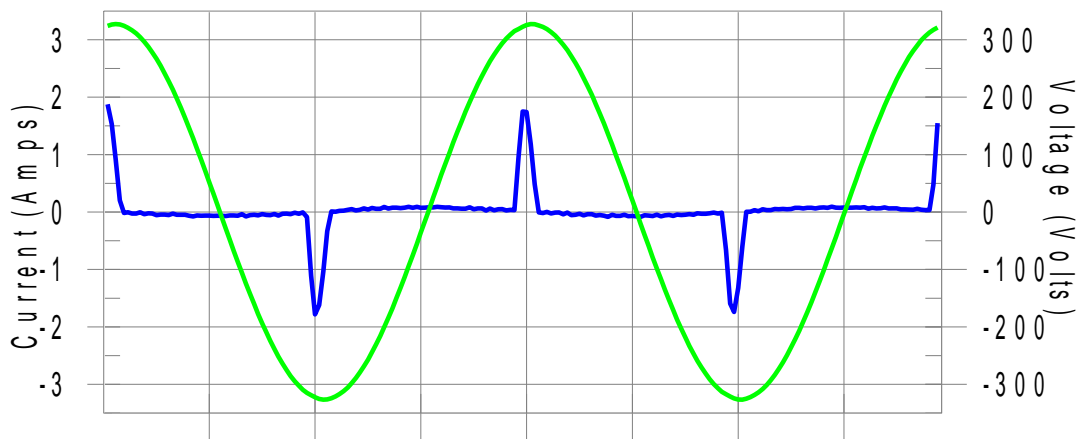

Harmonics and Class A limit line

European Limits

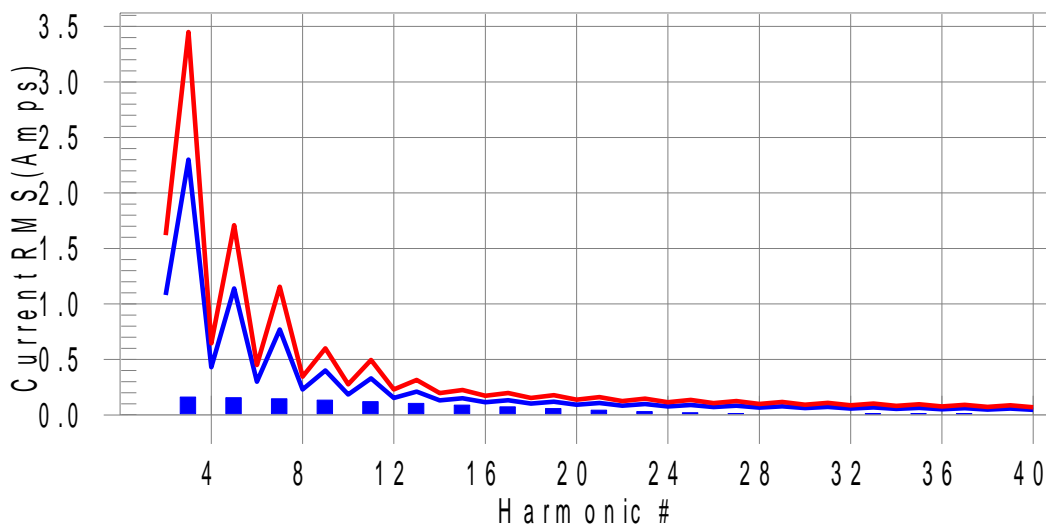

Test result: Pass Worst harmonics H15-39.6% of 150% limit, H15-59.1% of 100% limit.




Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.002	1.080	N/A	0.003	1.620	N/A	Pass
3	0.162	2.300	7.0	0.163	3.450	4.7	Pass
4	0.002	0.430	N/A	0.002	0.645	N/A	Pass
5	0.155	1.140	13.6	0.155	1.710	9.1	Pass
6	0.002	0.300	N/A	0.002	0.450	N/A	Pass
7	0.146	0.770	18.9	0.146	1.155	12.6	Pass
8	0.002	0.230	N/A	0.002	0.345	N/A	Pass
9	0.134	0.400	33.5	0.134	0.600	22.4	Pass
10	0.002	0.184	N/A	0.002	0.276	N/A	Pass
11	0.120	0.330	36.3	0.120	0.495	24.3	Pass
12	0.002	0.153	N/A	0.002	0.230	N/A	Pass
13	0.105	0.210	49.8	0.105	0.315	33.3	Pass
14	0.002	0.131	N/A	0.002	0.197	N/A	Pass
15	0.089	0.150	59.1	0.089	0.225	39.6	Pass
16	0.002	0.115	N/A	0.002	0.173	N/A	Pass
17	0.073	0.132	55.1	0.073	0.198	36.9	Pass
18	0.002	0.102	N/A	0.002	0.153	N/A	Pass
19	0.057	0.118	48.5	0.058	0.178	32.5	Pass
20	0.002	0.092	N/A	0.002	0.138	N/A	Pass
21	0.043	0.107	40.4	0.044	0.161	27.1	Pass
22	0.001	0.084	N/A	0.002	0.125	N/A	Pass
23	0.031	0.098	31.5	0.031	0.147	21.2	Pass
24	0.001	0.077	N/A	0.001	0.115	N/A	Pass
25	0.021	0.090	22.9	0.021	0.135	15.4	Pass
26	0.001	0.071	N/A	0.001	0.107	N/A	Pass
27	0.013	0.083	16.0	0.014	0.125	10.8	Pass
28	0.001	0.066	N/A	0.001	0.099	N/A	Pass
29	0.010	0.078	13.0	0.010	0.116	8.7	Pass
30	0.001	0.061	N/A	0.001	0.092	N/A	Pass
31	0.010	0.073	14.0	0.010	0.109	9.5	Pass
32	0.001	0.058	N/A	0.001	0.086	N/A	Pass
33	0.011	0.068	16.5	0.011	0.102	11.2	Pass
34	0.001	0.054	N/A	0.001	0.081	N/A	Pass
35	0.012	0.064	18.2	0.012	0.096	12.3	Pass
36	0.002	0.051	N/A	0.002	0.077	N/A	Pass
37	0.011	0.061	18.8	0.012	0.091	12.7	Pass
38	0.006	0.048	13.2	0.006	0.073	8.9	Pass
39	0.010	0.058	17.7	0.010	0.087	11.9	Pass
40	0.001	0.046	N/A	0.002	0.069	N/A	Pass

For adaptor: adapter 3_ FY2401500S3


Wi-Fi mode, charging

Test Result: Pass Source qualification: Normal

Current & voltage waveforms

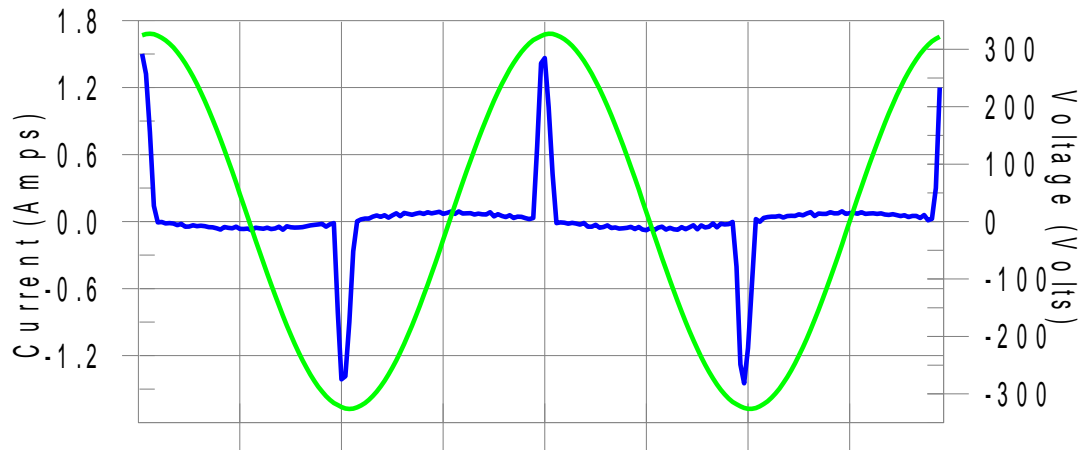

Harmonics and Class A limit line **European Limits**

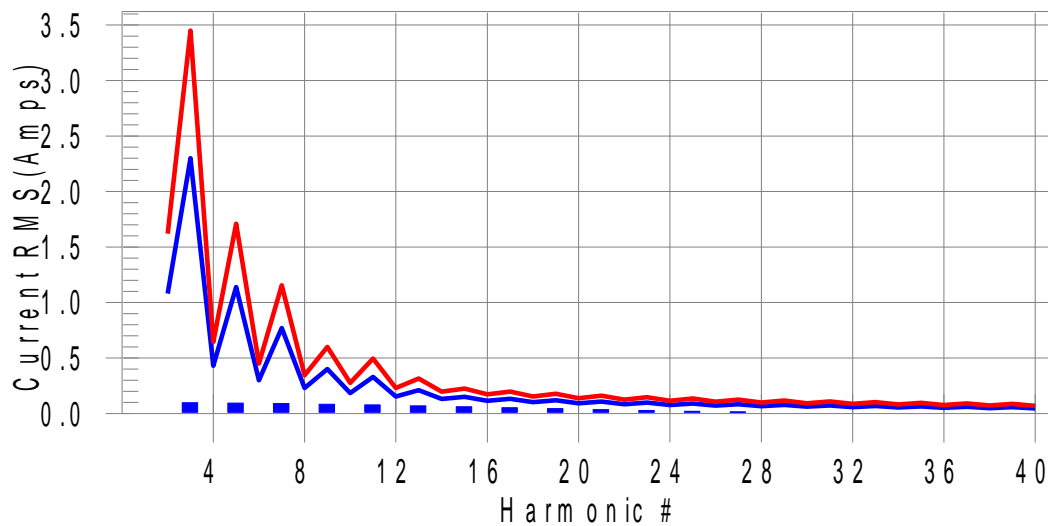

Test result: Pass Worst harmonics H15-33.1% of 150% limit, H15-40.5% of 100% limit.



Highest parameter values during test:

V_RMS (Volts):	230.705	Frequency(Hz):	50.00
I_Peak (Amps):	1.542	I_RMS (Amps):	0.336
I_Fund (Amps):	0.147	Crest Factor:	4.944
Power (Watts):	30.8	Power Factor:	0.398


Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	1.080	N/A	0.002	1.620	N/A	Pass
3	0.098	2.300	4.2	0.131	3.450	3.8	Pass
4	0.002	0.430	N/A	0.002	0.645	N/A	Pass
5	0.094	1.140	8.3	0.127	1.710	7.4	Pass
6	0.002	0.300	N/A	0.002	0.450	N/A	Pass
7	0.090	0.770	11.7	0.119	1.155	10.3	Pass
8	0.002	0.230	N/A	0.002	0.345	N/A	Pass
9	0.084	0.400	21.0	0.110	0.600	18.3	Pass
10	0.002	0.184	N/A	0.002	0.276	N/A	Pass
11	0.077	0.330	23.3	0.099	0.495	19.9	Pass
12	0.002	0.153	N/A	0.002	0.230	N/A	Pass
13	0.069	0.210	32.9	0.087	0.315	27.6	Pass
14	0.002	0.131	N/A	0.002	0.197	N/A	Pass
15	0.061	0.150	40.5	0.074	0.225	33.1	Pass
16	0.002	0.115	N/A	0.002	0.173	N/A	Pass
17	0.052	0.132	39.6	0.062	0.198	31.2	Pass
18	0.002	0.102	N/A	0.002	0.153	N/A	Pass
19	0.044	0.118	36.8	0.049	0.178	27.8	Pass
20	0.002	0.092	N/A	0.002	0.138	N/A	Pass
21	0.035	0.107	32.9	0.038	0.161	23.5	Pass
22	0.001	0.084	N/A	0.001	0.125	N/A	Pass
23	0.027	0.098	28.0	0.028	0.147	19.1	Pass
24	0.001	0.077	N/A	0.001	0.115	N/A	Pass
25	0.020	0.090	22.4	0.021	0.135	15.4	Pass
26	0.001	0.071	N/A	0.001	0.107	N/A	Pass
27	0.014	0.083	16.8	0.015	0.125	12.4	Pass
28	0.001	0.066	N/A	0.001	0.099	N/A	Pass
29	0.009	0.078	11.5	0.011	0.116	9.3	Pass
30	0.001	0.061	N/A	0.001	0.092	N/A	Pass
31	0.006	0.073	7.7	0.007	0.109	6.6	Pass
32	0.001	0.058	N/A	0.001	0.086	N/A	Pass
33	0.004	0.068	N/A	0.008	0.102	N/A	Pass
34	0.001	0.054	N/A	0.001	0.081	N/A	Pass
35	0.005	0.064	N/A	0.009	0.096	N/A	Pass
36	0.002	0.051	N/A	0.002	0.077	N/A	Pass
37	0.006	0.061	10.4	0.010	0.091	11.2	Pass
38	0.006	0.048	13.4	0.007	0.073	9.1	Pass
39	0.007	0.058	11.4	0.009	0.087	10.6	Pass
40	0.002	0.046	N/A	0.002	0.069	N/A	Pass

For adaptor: adapter 1_FY2401500S1


BLE mode, running mode

Test Result: Pass Source qualification: Normal

Current & voltage waveforms

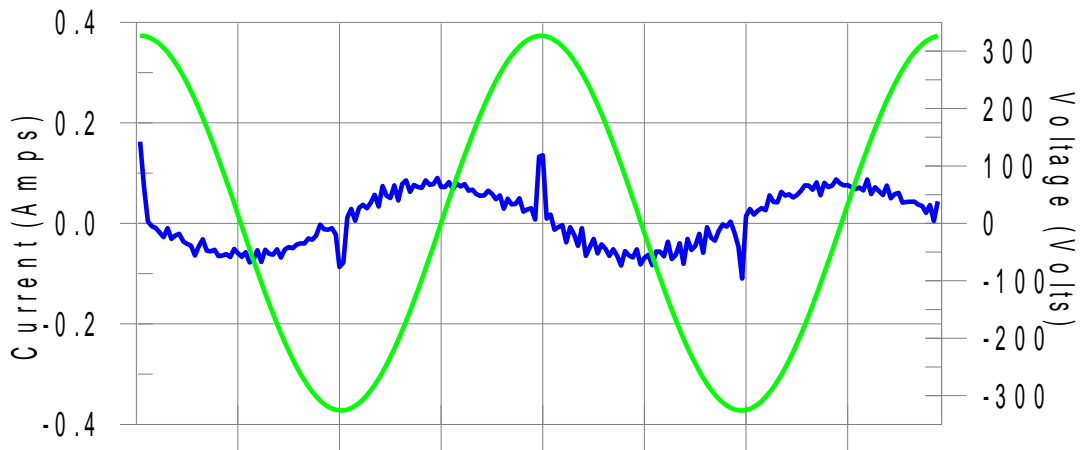

Harmonics and Class A limit line European Limits

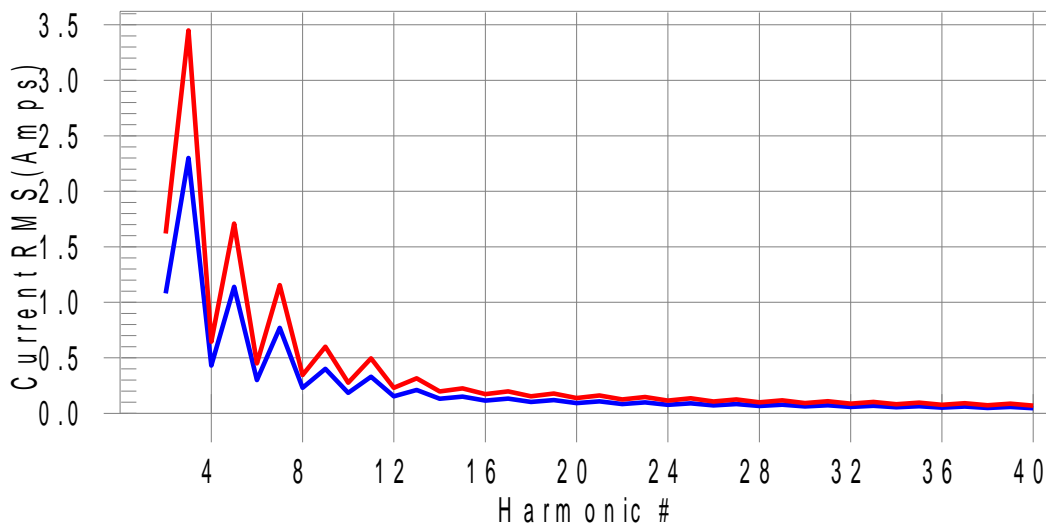

Test result: Pass Worst harmonics H38-9.1% of 150% limit, H38-12.9% of 100% limit.



Test Result: Pass Source qualification: Normal
 THC(A): 0.023 I-THD(%): 44.3 POHC(A): 0.013 POHC Limit(A): 0.251

Highest parameter values during test:

V_RMS (Volts): 230.705 Frequency(Hz): 50.00
 I_Peak (Amps): 0.209 I_RMS (Amps): 0.057
 I_Fund (Amps): 0.051 Crest Factor: 3.676
 Power (Watts): 1.5 Power Factor: 0.114


Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	1.080	N/A	0.002	1.620	N/A	Pass
3	0.006	2.300	0.3	0.007	3.450	0.2	Pass
4	0.001	0.430	N/A	0.001	0.645	N/A	Pass
5	0.006	1.140	0.5	0.006	1.710	0.4	Pass
6	0.001	0.300	N/A	0.001	0.450	N/A	Pass
7	0.006	0.770	0.8	0.006	1.155	0.5	Pass
8	0.001	0.230	N/A	0.001	0.345	N/A	Pass
9	0.006	0.400	1.5	0.006	0.600	1.0	Pass
10	0.001	0.184	N/A	0.001	0.276	N/A	Pass
11	0.006	0.330	1.7	0.006	0.495	1.2	Pass
12	0.001	0.153	N/A	0.001	0.230	N/A	Pass
13	0.006	0.210	2.7	0.006	0.315	1.8	Pass
14	0.001	0.131	N/A	0.001	0.197	N/A	Pass
15	0.005	0.150	3.6	0.006	0.225	2.5	Pass
16	0.001	0.115	N/A	0.001	0.173	N/A	Pass
17	0.005	0.132	4.0	0.005	0.198	2.7	Pass
18	0.001	0.102	N/A	0.001	0.153	N/A	Pass
19	0.005	0.118	4.4	0.005	0.178	3.1	Pass
20	0.001	0.092	N/A	0.001	0.138	N/A	Pass
21	0.005	0.107	N/A	0.005	0.161	N/A	Pass
22	0.001	0.084	N/A	0.001	0.125	N/A	Pass
23	0.005	0.098	N/A	0.005	0.147	N/A	Pass
24	0.001	0.077	N/A	0.001	0.115	N/A	Pass
25	0.005	0.090	N/A	0.005	0.135	N/A	Pass
26	0.001	0.071	N/A	0.001	0.107	N/A	Pass
27	0.004	0.083	N/A	0.004	0.125	N/A	Pass
28	0.001	0.066	N/A	0.001	0.099	N/A	Pass
29	0.004	0.078	N/A	0.004	0.116	N/A	Pass
30	0.001	0.061	N/A	0.001	0.092	N/A	Pass
31	0.004	0.073	N/A	0.004	0.109	N/A	Pass
32	0.001	0.058	N/A	0.001	0.086	N/A	Pass
33	0.004	0.068	N/A	0.004	0.102	N/A	Pass
34	0.001	0.054	N/A	0.001	0.081	N/A	Pass
35	0.003	0.064	N/A	0.004	0.096	N/A	Pass
36	0.002	0.051	N/A	0.002	0.077	N/A	Pass
37	0.004	0.061	N/A	0.004	0.091	N/A	Pass
38	0.006	0.048	12.9	0.007	0.073	9.1	Pass
39	0.004	0.058	N/A	0.005	0.087	N/A	Pass
40	0.001	0.046	N/A	0.002	0.069	N/A	Pass

For adaptor: adapter 1_FY2401500S1


Wi-Fi mode, running mode

Test Result: Pass Source qualification: Normal

Current & voltage waveforms

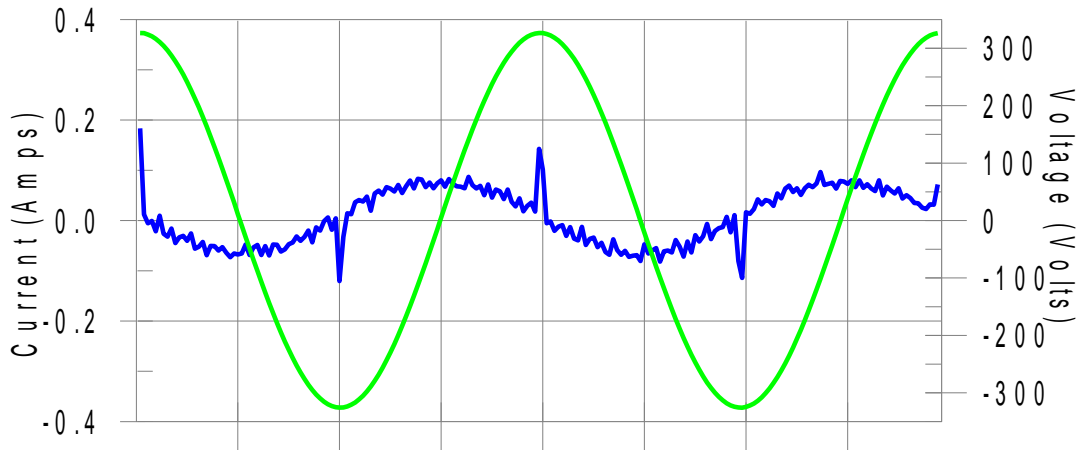

Harmonics and Class A limit line European Limits

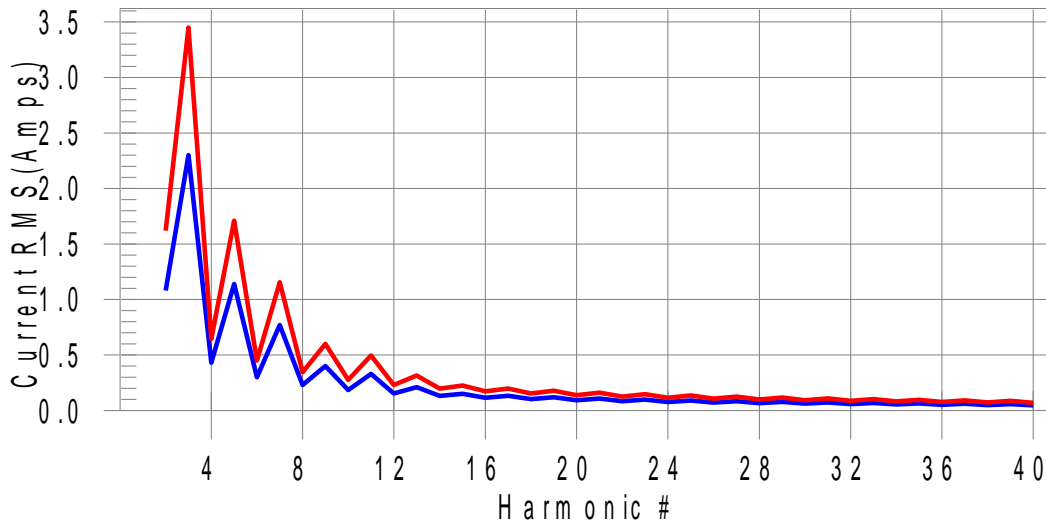

Test result: Pass Worst harmonics H39-10.6% of 150% limit, H39-12% of 100% limit.



Test Result: Pass Source qualification: Normal
 THC(A): 0.023 I-THD(%): 43.9 POHC(A): 0.014 POHC Limit(A): 0.251

Highest parameter values during test:

V_RMS (Volts): 230.719 Frequency(Hz): 50.00
 I_Peak (Amps): 0.214 I_RMS (Amps): 0.058
 I_Fund (Amps): 0.051 Crest Factor: 3.744
 Power (Watts): 1.5 Power Factor: 0.116


Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	1.080	N/A	0.002	1.620	N/A	Pass
3	0.006	2.300	0.3	0.007	3.450	0.2	Pass
4	0.001	0.430	N/A	0.001	0.645	N/A	Pass
5	0.006	1.140	0.5	0.006	1.710	0.4	Pass
6	0.001	0.300	N/A	0.001	0.450	N/A	Pass
7	0.006	0.770	0.8	0.006	1.155	0.5	Pass
8	0.001	0.230	N/A	0.001	0.345	N/A	Pass
9	0.006	0.400	1.5	0.006	0.600	1.0	Pass
10	0.001	0.184	N/A	0.001	0.276	N/A	Pass
11	0.006	0.330	1.7	0.006	0.495	1.2	Pass
12	0.001	0.153	N/A	0.001	0.230	N/A	Pass
13	0.006	0.210	2.7	0.006	0.315	1.8	Pass
14	0.001	0.131	N/A	0.001	0.197	N/A	Pass
15	0.005	0.150	3.6	0.006	0.225	2.5	Pass
16	0.001	0.115	N/A	0.001	0.173	N/A	Pass
17	0.005	0.132	4.0	0.005	0.198	2.7	Pass
18	0.001	0.102	N/A	0.001	0.153	N/A	Pass
19	0.005	0.118	4.4	0.005	0.178	3.0	Pass
20	0.001	0.092	N/A	0.001	0.138	N/A	Pass
21	0.005	0.107	N/A	0.005	0.161	N/A	Pass
22	0.001	0.084	N/A	0.001	0.125	N/A	Pass
23	0.005	0.098	N/A	0.005	0.147	N/A	Pass
24	0.001	0.077	N/A	0.001	0.115	N/A	Pass
25	0.005	0.090	N/A	0.005	0.135	N/A	Pass
26	0.001	0.071	N/A	0.001	0.107	N/A	Pass
27	0.004	0.083	N/A	0.004	0.125	N/A	Pass
28	0.001	0.066	N/A	0.001	0.099	N/A	Pass
29	0.004	0.078	N/A	0.004	0.116	N/A	Pass
30	0.001	0.061	N/A	0.001	0.092	N/A	Pass
31	0.004	0.073	N/A	0.004	0.109	N/A	Pass
32	0.001	0.058	N/A	0.001	0.086	N/A	Pass
33	0.004	0.068	N/A	0.004	0.102	N/A	Pass
34	0.001	0.054	N/A	0.001	0.081	N/A	Pass
35	0.003	0.064	N/A	0.004	0.096	N/A	Pass
36	0.001	0.051	N/A	0.001	0.077	N/A	Pass
37	0.003	0.061	N/A	0.004	0.091	N/A	Pass
38	0.002	0.048	N/A	0.002	0.073	N/A	Pass
39	0.007	0.058	12.0	0.009	0.087	10.6	Pass
40	0.001	0.046	N/A	0.001	0.069	N/A	Pass

For adaptor: adapter 2_FY2401500S2


BLE mode, running

Test Result: Pass Source qualification: Normal

Current & voltage waveforms

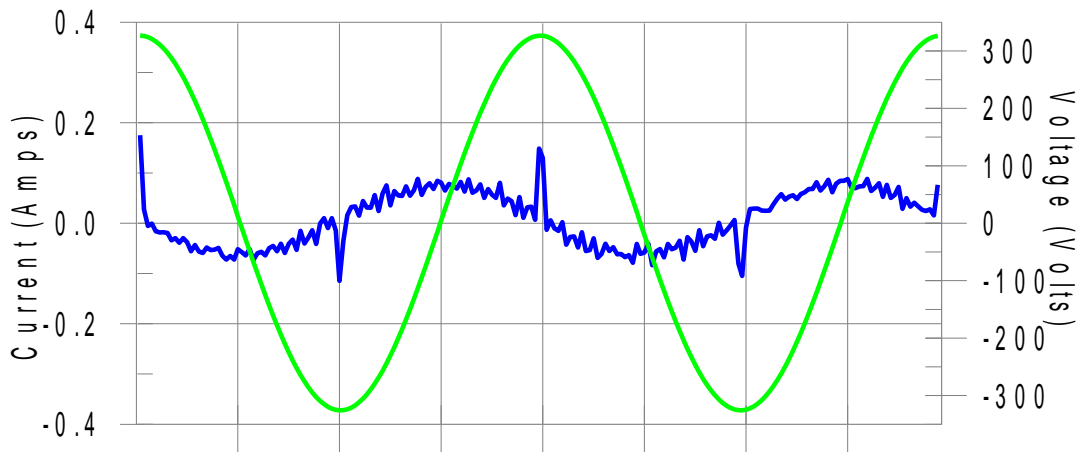

Harmonics and Class A limit line European Limits

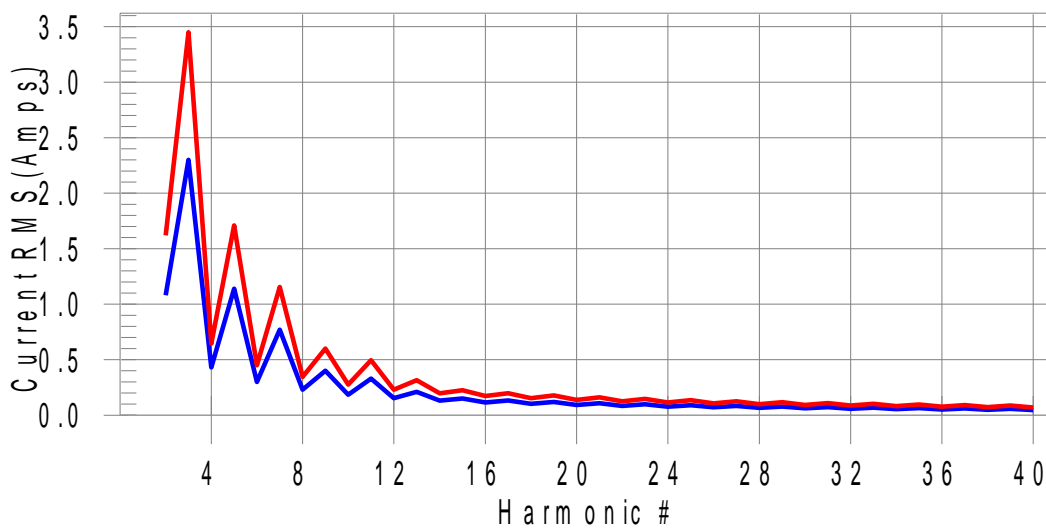

Test result: Pass Worst harmonics H38-9.3% of 150% limit, H38-13.2% of 100% limit.



Test Result: Pass Source qualification: Normal
 THC(A): 0.023 I-THD(%): 44.3 POHC(A): 0.013 POHC Limit(A): 0.251

Highest parameter values during test:

V_RMS (Volts): 230.708 Frequency(Hz): 50.00
 I_Peak (Amps): 0.212 I_RMS (Amps): 0.057
 I_Fund (Amps): 0.051 Crest Factor: 3.778
 Power (Watts): 1.5 Power Factor: 0.116


Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	1.080	N/A	0.002	1.620	N/A	Pass
3	0.006	2.300	0.3	0.007	3.450	0.2	Pass
4	0.001	0.430	N/A	0.001	0.645	N/A	Pass
5	0.006	1.140	0.5	0.006	1.710	0.4	Pass
6	0.001	0.300	N/A	0.001	0.450	N/A	Pass
7	0.006	0.770	0.8	0.006	1.155	0.5	Pass
8	0.001	0.230	N/A	0.001	0.345	N/A	Pass
9	0.006	0.400	1.4	0.006	0.600	1.0	Pass
10	0.001	0.184	N/A	0.001	0.276	N/A	Pass
11	0.006	0.330	1.7	0.006	0.495	1.2	Pass
12	0.001	0.153	N/A	0.001	0.230	N/A	Pass
13	0.006	0.210	2.7	0.006	0.315	1.8	Pass
14	0.001	0.131	N/A	0.001	0.197	N/A	Pass
15	0.005	0.150	3.6	0.006	0.225	2.5	Pass
16	0.001	0.115	N/A	0.001	0.173	N/A	Pass
17	0.005	0.132	4.0	0.005	0.198	2.7	Pass
18	0.001	0.102	N/A	0.001	0.153	N/A	Pass
19	0.005	0.118	4.4	0.005	0.178	3.0	Pass
20	0.001	0.092	N/A	0.001	0.138	N/A	Pass
21	0.005	0.107	N/A	0.005	0.161	N/A	Pass
22	0.001	0.084	N/A	0.001	0.125	N/A	Pass
23	0.005	0.098	N/A	0.005	0.147	N/A	Pass
24	0.001	0.077	N/A	0.001	0.115	N/A	Pass
25	0.005	0.090	N/A	0.005	0.135	N/A	Pass
26	0.001	0.071	N/A	0.001	0.107	N/A	Pass
27	0.004	0.083	N/A	0.004	0.125	N/A	Pass
28	0.001	0.066	N/A	0.001	0.099	N/A	Pass
29	0.004	0.078	N/A	0.004	0.116	N/A	Pass
30	0.001	0.061	N/A	0.001	0.092	N/A	Pass
31	0.004	0.073	N/A	0.004	0.109	N/A	Pass
32	0.001	0.058	N/A	0.001	0.086	N/A	Pass
33	0.004	0.068	N/A	0.004	0.102	N/A	Pass
34	0.001	0.054	N/A	0.001	0.081	N/A	Pass
35	0.003	0.064	N/A	0.004	0.096	N/A	Pass
36	0.002	0.051	N/A	0.002	0.077	N/A	Pass
37	0.004	0.061	N/A	0.004	0.091	N/A	Pass
38	0.006	0.048	13.2	0.007	0.073	9.3	Pass
39	0.004	0.058	N/A	0.004	0.087	N/A	Pass
40	0.002	0.046	N/A	0.002	0.069	N/A	Pass

For adaptor: adapter 2_FY2401500S2


Wi-Fi mode, running

Test Result: Pass Source qualification: Normal

Current & voltage waveforms

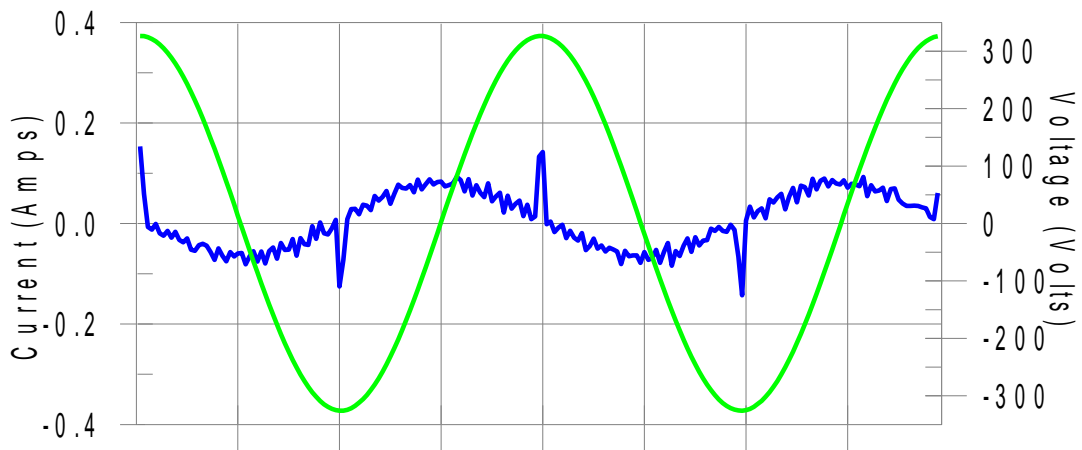

Harmonics and Class A limit line European Limits

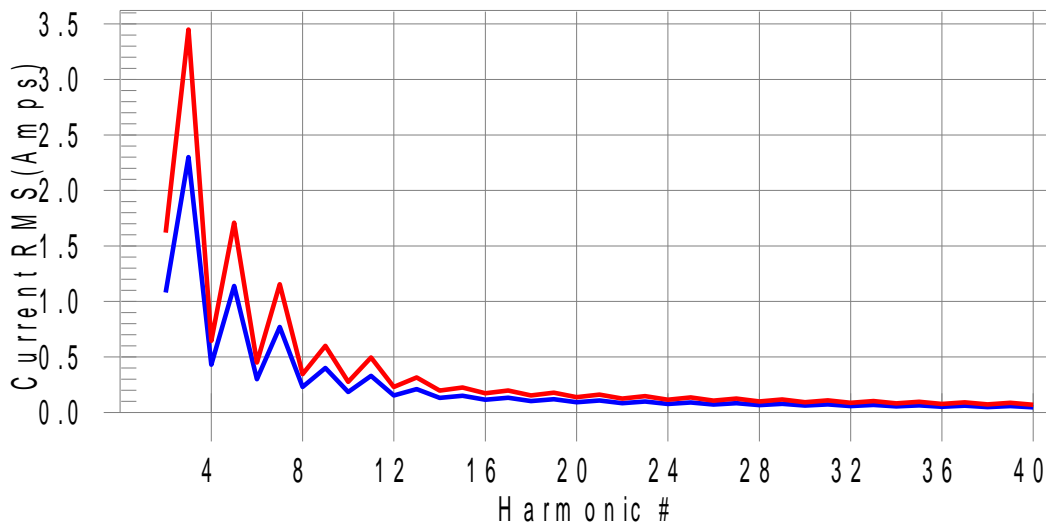

Test result: Pass Worst harmonics H38-9.0% of 150% limit, H38-11.2% of 100% limit.



Test Result: Pass Source qualification: Normal
 THC(A): 0.023 I-THD(%): 43.9 POHC(A): 0.013 POHC Limit(A): 0.251

Highest parameter values during test:

V_RMS (Volts): 230.711 Frequency(Hz): 50.00
 I_Peak (Amps): 0.209 I_RMS (Amps): 0.057
 I_Fund (Amps): 0.052 Crest Factor: 3.698
 Power (Watts): 1.5 Power Factor: 0.118


Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	1.080	N/A	0.002	1.620	N/A	Pass
3	0.006	2.300	0.3	0.007	3.450	0.2	Pass
4	0.001	0.430	N/A	0.001	0.645	N/A	Pass
5	0.006	1.140	0.5	0.006	1.710	0.4	Pass
6	0.001	0.300	N/A	0.001	0.450	N/A	Pass
7	0.006	0.770	0.8	0.006	1.155	0.5	Pass
8	0.001	0.230	N/A	0.001	0.345	N/A	Pass
9	0.006	0.400	1.5	0.006	0.600	1.0	Pass
10	0.001	0.184	N/A	0.001	0.276	N/A	Pass
11	0.006	0.330	1.7	0.006	0.495	1.2	Pass
12	0.001	0.153	N/A	0.001	0.230	N/A	Pass
13	0.006	0.210	2.7	0.006	0.315	1.8	Pass
14	0.001	0.131	N/A	0.001	0.197	N/A	Pass
15	0.005	0.150	3.6	0.006	0.225	2.5	Pass
16	0.001	0.115	N/A	0.001	0.173	N/A	Pass
17	0.005	0.132	4.0	0.006	0.198	2.8	Pass
18	0.001	0.102	N/A	0.001	0.153	N/A	Pass
19	0.005	0.118	4.4	0.006	0.178	3.1	Pass
20	0.001	0.092	N/A	0.001	0.138	N/A	Pass
21	0.005	0.107	N/A	0.005	0.161	N/A	Pass
22	0.001	0.084	N/A	0.001	0.125	N/A	Pass
23	0.005	0.098	N/A	0.005	0.147	N/A	Pass
24	0.001	0.077	N/A	0.001	0.115	N/A	Pass
25	0.005	0.090	N/A	0.005	0.135	N/A	Pass
26	0.001	0.071	N/A	0.001	0.107	N/A	Pass
27	0.004	0.083	N/A	0.004	0.125	N/A	Pass
28	0.001	0.066	N/A	0.001	0.099	N/A	Pass
29	0.004	0.078	N/A	0.004	0.116	N/A	Pass
30	0.001	0.061	N/A	0.001	0.092	N/A	Pass
31	0.004	0.073	N/A	0.004	0.109	N/A	Pass
32	0.001	0.058	N/A	0.001	0.086	N/A	Pass
33	0.004	0.068	N/A	0.004	0.102	N/A	Pass
34	0.001	0.054	N/A	0.001	0.081	N/A	Pass
35	0.003	0.064	N/A	0.004	0.096	N/A	Pass
36	0.002	0.051	N/A	0.002	0.077	N/A	Pass
37	0.004	0.061	N/A	0.004	0.091	N/A	Pass
38	0.005	0.048	11.2	0.007	0.073	9.0	Pass
39	0.005	0.058	N/A	0.006	0.087	N/A	Pass
40	0.001	0.046	N/A	0.001	0.069	N/A	Pass

For adaptor: adapter 3_ FY2401500S3


BLE mode, running

Test Result: Pass Source qualification: Normal

Current & voltage waveforms

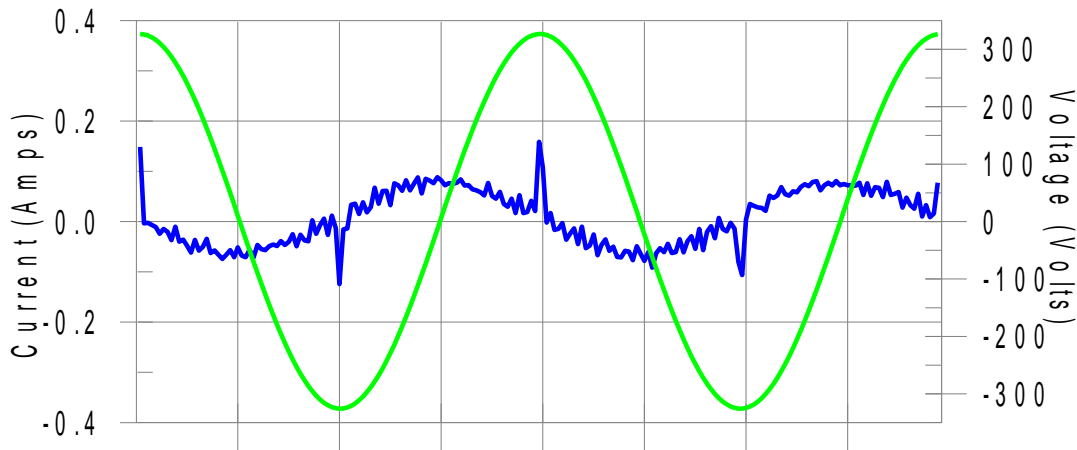

Harmonics and Class A limit line European Limits

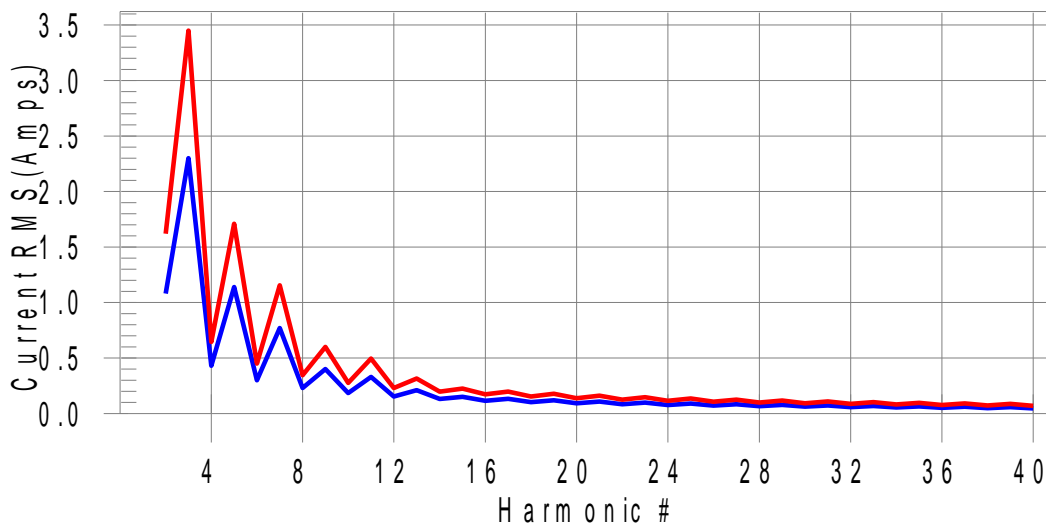

Test result: Pass Worst harmonics H38-9.1% of 150% limit, H38-13.1% of 100% limit.

Test Result: Pass Source qualification: Normal
THC(A): 0.023 I-THD(%): 44.0 POHC(A): 0.013 POHC Limit(A): 0.251



Highest parameter values during test:

V_RMS (Volts):	230.712	Frequency(Hz):	50.00
I_Peak (Amps):	0.216	I_RMS (Amps):	0.057
I_Fund (Amps):	0.051	Crest Factor:	3.840
Power (Watts):	1.5	Power Factor:	0.114


Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	1.080	N/A	0.002	1.620	N/A	Pass
3	0.006	2.300	0.3	0.007	3.450	0.2	Pass
4	0.001	0.430	N/A	0.001	0.645	N/A	Pass
5	0.006	1.140	0.5	0.006	1.710	0.4	Pass
6	0.001	0.300	N/A	0.001	0.450	N/A	Pass
7	0.006	0.770	0.8	0.006	1.155	0.5	Pass
8	0.001	0.230	N/A	0.001	0.345	N/A	Pass
9	0.006	0.400	1.5	0.006	0.600	1.0	Pass
10	0.001	0.184	N/A	0.001	0.276	N/A	Pass
11	0.006	0.330	1.7	0.006	0.495	1.2	Pass
12	0.001	0.153	N/A	0.001	0.230	N/A	Pass
13	0.006	0.210	2.6	0.006	0.315	1.8	Pass
14	0.001	0.131	N/A	0.001	0.197	N/A	Pass
15	0.005	0.150	3.6	0.005	0.225	2.4	Pass
16	0.001	0.115	N/A	0.001	0.173	N/A	Pass
17	0.005	0.132	4.0	0.005	0.198	2.7	Pass
18	0.001	0.102	N/A	0.001	0.153	N/A	Pass
19	0.005	0.118	4.3	0.005	0.178	3.0	Pass
20	0.001	0.092	N/A	0.001	0.138	N/A	Pass
21	0.005	0.107	N/A	0.005	0.161	N/A	Pass
22	0.001	0.084	N/A	0.001	0.125	N/A	Pass
23	0.005	0.098	N/A	0.005	0.147	N/A	Pass
24	0.001	0.077	N/A	0.001	0.115	N/A	Pass
25	0.004	0.090	N/A	0.005	0.135	N/A	Pass
26	0.001	0.071	N/A	0.001	0.107	N/A	Pass
27	0.004	0.083	N/A	0.004	0.125	N/A	Pass
28	0.001	0.066	N/A	0.001	0.099	N/A	Pass
29	0.004	0.078	N/A	0.004	0.116	N/A	Pass
30	0.001	0.061	N/A	0.001	0.092	N/A	Pass
31	0.004	0.073	N/A	0.004	0.109	N/A	Pass
32	0.001	0.058	N/A	0.001	0.086	N/A	Pass
33	0.004	0.068	N/A	0.004	0.102	N/A	Pass
34	0.001	0.054	N/A	0.001	0.081	N/A	Pass
35	0.003	0.064	N/A	0.004	0.096	N/A	Pass
36	0.002	0.051	N/A	0.002	0.077	N/A	Pass
37	0.004	0.061	N/A	0.004	0.091	N/A	Pass
38	0.006	0.048	13.1	0.007	0.073	9.1	Pass
39	0.004	0.058	N/A	0.004	0.087	N/A	Pass
40	0.001	0.046	N/A	0.002	0.069	N/A	Pass

For adaptor: adapter 3_ FY2401500S3


Wi-Fi mode, running

Test Result: Pass Source qualification: Normal

Current & voltage waveforms

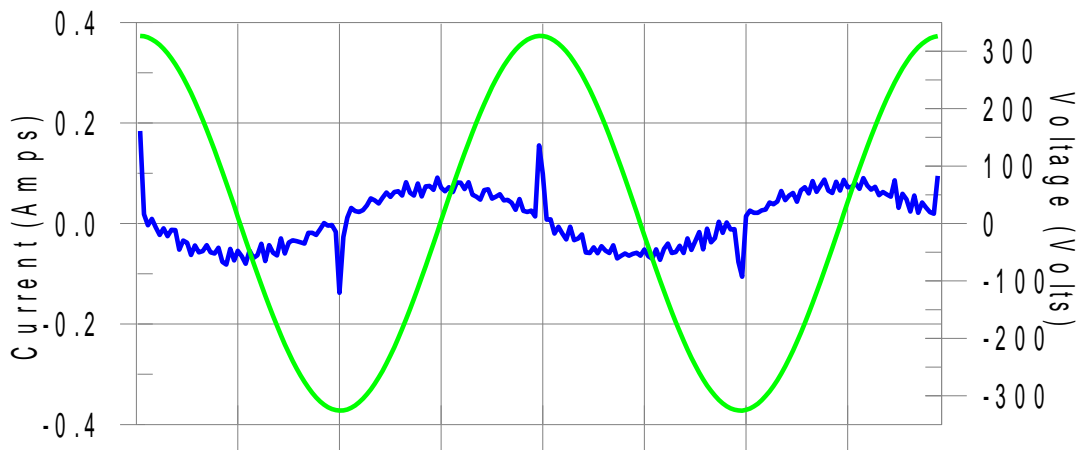

Harmonics and Class A limit line European Limits

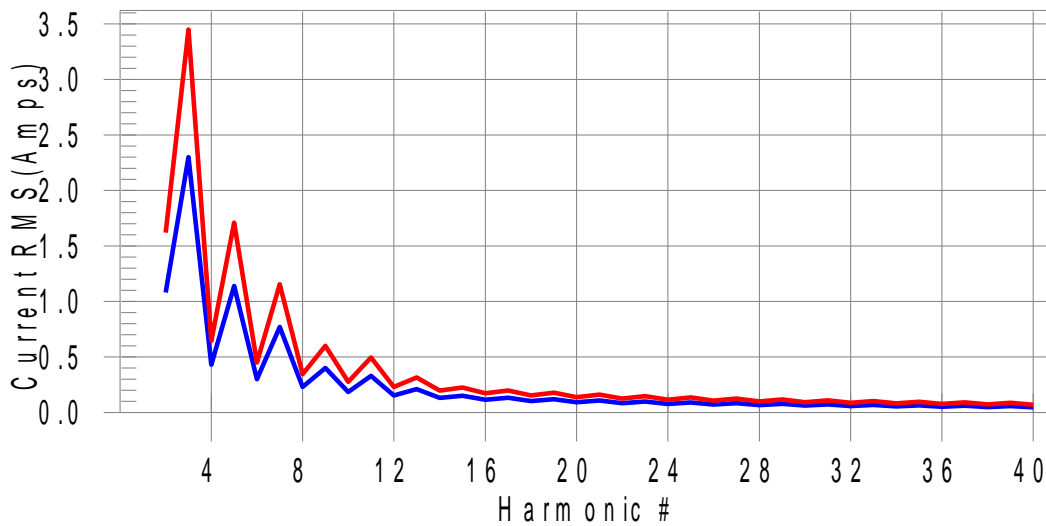

Test result: Pass Worst harmonics H38-9.0% of 150% limit, H38-12.7% of 100% limit.



Test Result: Pass Source qualification: Normal
 THC(A): 0.023 I-THD(%): 43.9 POHC(A): 0.013 POHC Limit(A): 0.251

Highest parameter values during test:

V_RMS (Volts):	230.710	Frequency(Hz):	50.00
I_Peak (Amps):	0.216	I_RMS (Amps):	0.057
I_Fund (Amps):	0.051	Crest Factor:	3.843
Power (Watts):	1.5	Power Factor:	0.116

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	1.080	N/A	0.002	1.620	N/A	Pass
3	0.006	2.300	0.3	0.007	3.450	0.2	Pass
4	0.001	0.430	N/A	0.001	0.645	N/A	Pass
5	0.006	1.140	0.5	0.006	1.710	0.4	Pass
6	0.001	0.300	N/A	0.001	0.450	N/A	Pass
7	0.006	0.770	0.8	0.006	1.155	0.5	Pass
8	0.001	0.230	N/A	0.001	0.345	N/A	Pass
9	0.006	0.400	1.5	0.006	0.600	1.0	Pass
10	0.001	0.184	N/A	0.001	0.276	N/A	Pass
11	0.006	0.330	1.7	0.006	0.495	1.2	Pass
12	0.001	0.153	N/A	0.001	0.230	N/A	Pass
13	0.006	0.210	2.7	0.006	0.315	1.8	Pass
14	0.001	0.131	N/A	0.001	0.197	N/A	Pass
15	0.005	0.150	3.6	0.006	0.225	2.5	Pass
16	0.001	0.115	N/A	0.001	0.173	N/A	Pass
17	0.005	0.132	4.0	0.005	0.198	2.7	Pass
18	0.001	0.102	N/A	0.001	0.153	N/A	Pass
19	0.005	0.118	4.4	0.005	0.178	3.0	Pass
20	0.001	0.092	N/A	0.001	0.138	N/A	Pass
21	0.005	0.107	N/A	0.005	0.161	N/A	Pass
22	0.001	0.084	N/A	0.001	0.125	N/A	Pass
23	0.005	0.098	N/A	0.005	0.147	N/A	Pass
24	0.001	0.077	N/A	0.001	0.115	N/A	Pass
25	0.005	0.090	N/A	0.005	0.135	N/A	Pass
26	0.001	0.071	N/A	0.001	0.107	N/A	Pass
27	0.004	0.083	N/A	0.004	0.125	N/A	Pass
28	0.001	0.066	N/A	0.001	0.099	N/A	Pass
29	0.004	0.078	N/A	0.004	0.116	N/A	Pass
30	0.001	0.061	N/A	0.001	0.092	N/A	Pass
31	0.004	0.073	N/A	0.004	0.109	N/A	Pass
32	0.001	0.058	N/A	0.001	0.086	N/A	Pass
33	0.004	0.068	N/A	0.004	0.102	N/A	Pass
34	0.001	0.054	N/A	0.001	0.081	N/A	Pass
35	0.003	0.064	N/A	0.004	0.096	N/A	Pass
36	0.002	0.051	N/A	0.002	0.077	N/A	Pass
37	0.004	0.061	N/A	0.004	0.091	N/A	Pass
38	0.006	0.048	12.7	0.007	0.073	9.0	Pass
39	0.004	0.058	N/A	0.005	0.087	N/A	Pass
40	0.001	0.046	N/A	0.001	0.069	N/A	Pass



Test setup

2.3.8 Test Location

This test was carried out in Harmonic Flicker Test area.

2.4 Voltage fluctuations & flicker (AC Power Port)

2.4.1 Specification Reference

EN 61000-3-3:2013 & EN 61000-3-3:2013/A1:2019, Clause 6

2.4.2 Equipment Under Test


LLS BL300i/YG (with Wi-Fi) , LLS BL300B/YG (with BLE)

2.4.3 Date of Test

10/11/2021-13/11/2021

2.4.4 Test Method

For equipment not mentioned in annex A, controls or automatic programs should be set to produce the most unfavorable sequence of voltage change, using only those combinations of controls and programmes which are mentioned by the manufacturer in the instruction manual, or are otherwise likely to be used

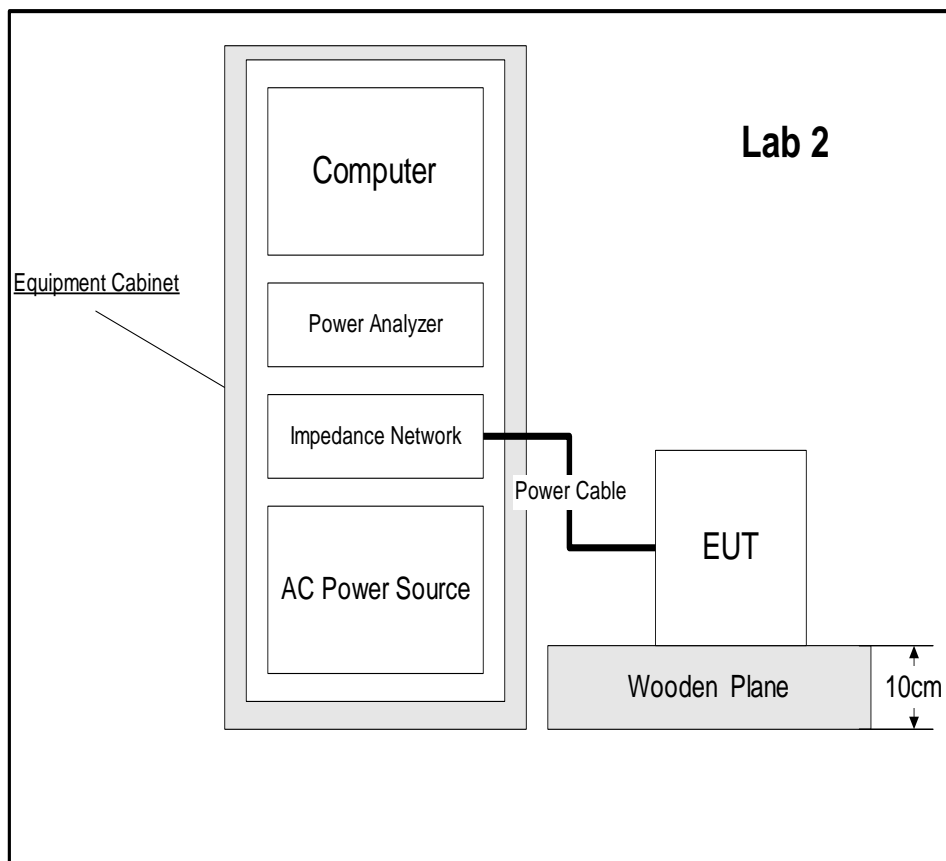

2.4.5 Environmental Conditions

Ambient Temperature	20.2 °C
Relative Humidity	55.5 %
Atmospheric Pressure	1010.2 mbar

2.4.6 Specification Limits

The value of P_{st} shall not be greater than 1.0

The value of P_{It} shall not be greater than 0.65

T_{max} , the accumulated time value of $d(t)$ with a deviation exceeding 3.3% during a single voltage change at the EUT terminals, shall not exceed 500ms

The maximum relative steady-state voltage change, d_c , shall not exceed 3.3%

The maximum relative voltage change d_{max} , shall not exceed

- a) 4% without additional conditions
- b) 6% for equipment which is:
 - Switched manually, or
 - Switched automatically more frequently than twice per day, and also has either a delayed start, or manual restart, after a power supply interruption
- c) 7% for equipment which is:
 - Attended whilst in use, or
 - Switched on automatically, or is intended to be switched on manually, no more than twice per day, and also has either a delayed restart or manual restart, after a power supply interruption

2.4.7 Test Results

Results for Configuration and Mode: AC Powered/Power on(Charging mode/running mode).

Performance assessment of the EUT made during this test: *Pass*.

Detailed results are shown below.




For adaptor: adapter 1_ FY2401500S1
 BLE, charging mode

Test Result: Pass


Status: Test Completed

Pst_i and limit line

European Limits

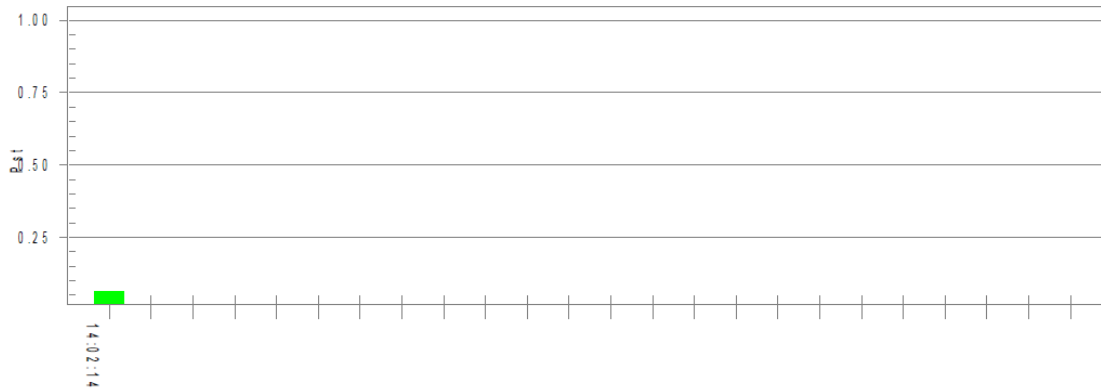

Plt and limit line

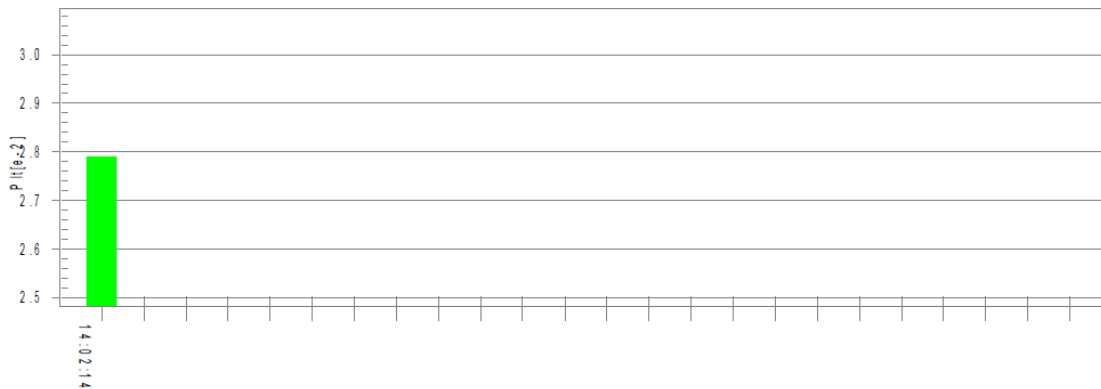

Parameter values recorded during the test:

Vrms at the end of test (Volt):	230.62			
T-max (mS):	0.0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	-0.09	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000	Pass




For adaptor: adapter 1_ FY2401500S1
 BLE, running mode

Test Result: Pass


Status: Test Completed

Pst_i and limit line

European Limits

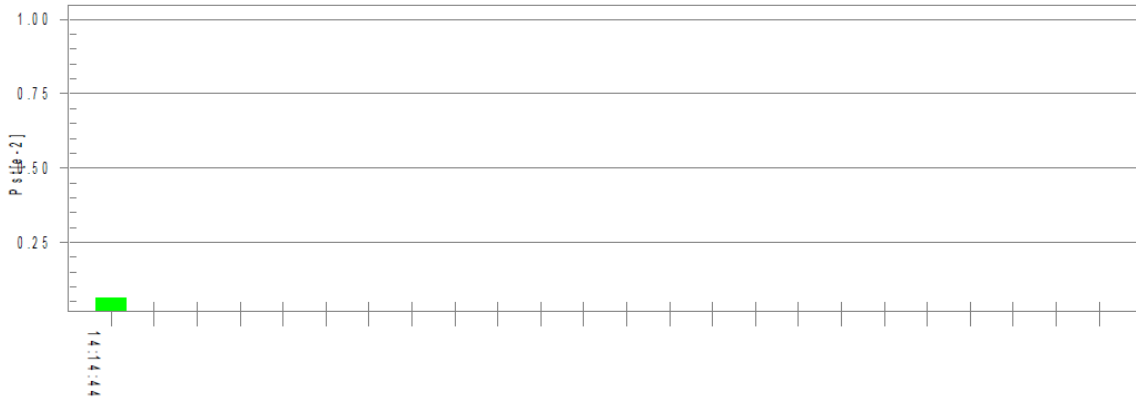

Plt and limit line

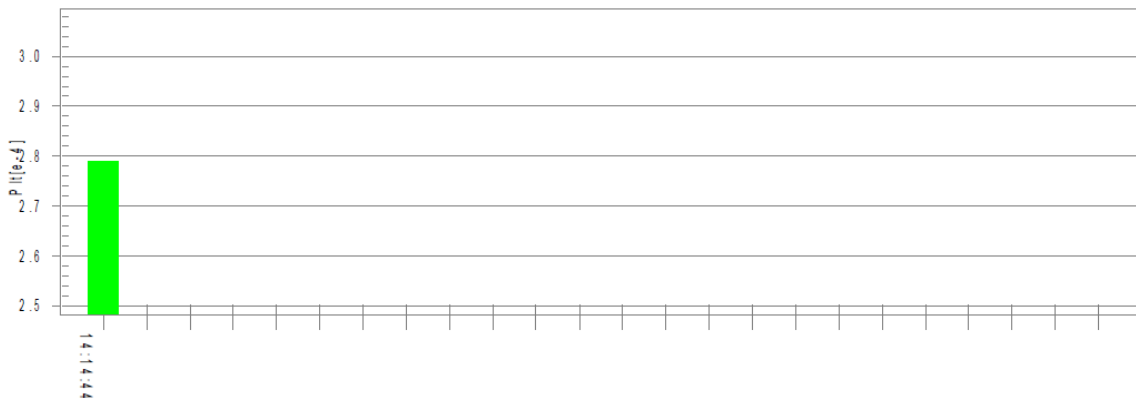

Parameter values recorded during the test:

Vrms at the end of test (Volt):	230.61		
T-max (mS):	0.0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	-0.07	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000 Pass




For adaptor: adapter 1_ FY2401500S1
 Wi-Fi, charging mode

Test Result: Pass


Status: Test Completed

Pst_i and limit line

European Limits

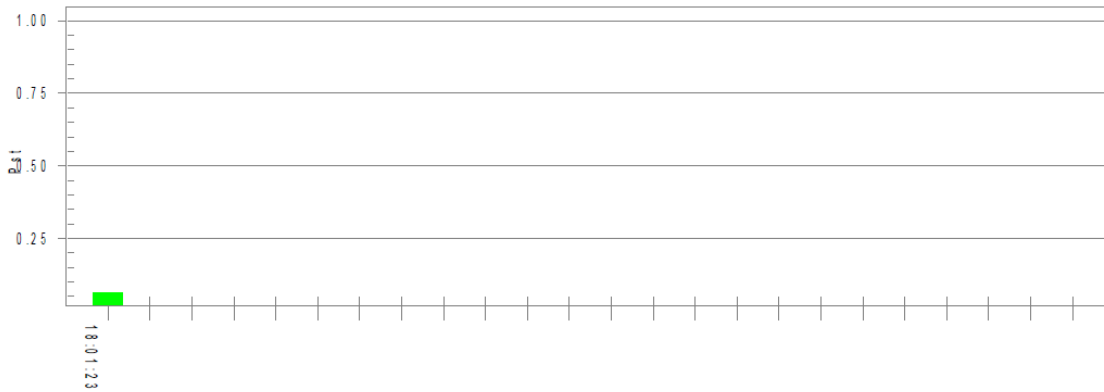

Plt and limit line

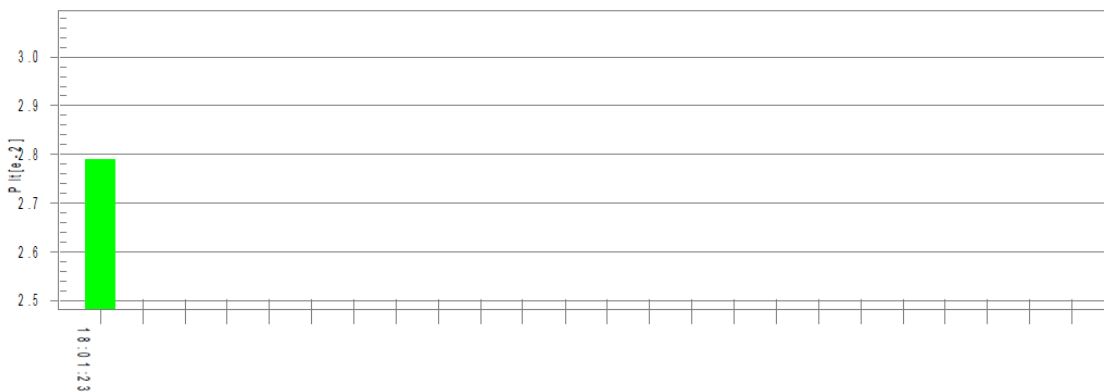

Parameter values recorded during the test:

Vrms at the end of test (Volt):	230.71		
T-max (mS):	0.0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	-0.09	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000 Pass




For adaptor: adapter 1_ FY2401500S1
 Wi-Fi, running mode

Test Result: Pass


Status: Test Completed

Pst_i and limit line

European Limits

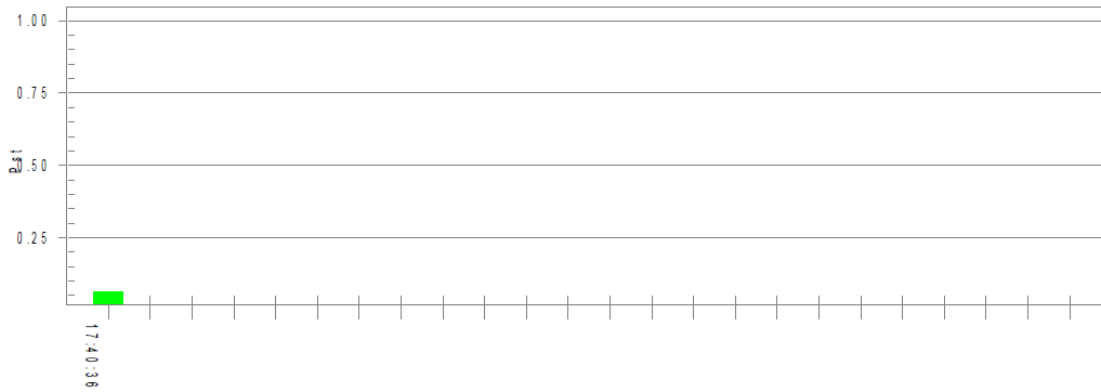

Plt and limit line

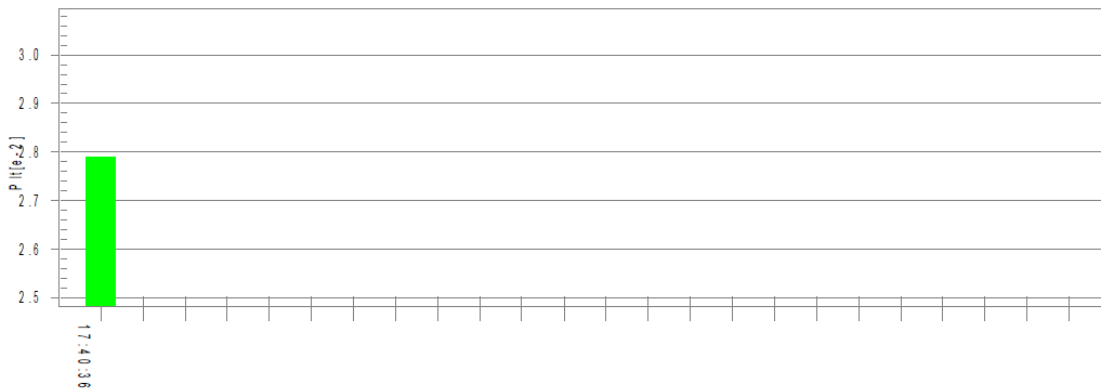

Parameter values recorded during the test:

Vrms at the end of test (Volt):	230.71		
T-max (mS):	0.0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	0.08	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000 Pass




For adaptor: adapter 2_ FY2401500S2
 BLE, charging mode

Test Result: Pass


Status: Test Completed

Pst_i and limit line

European Limits

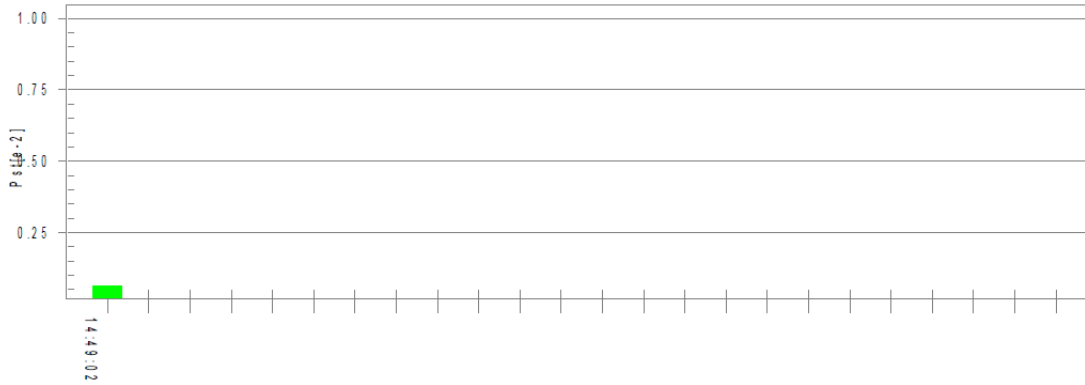

Plt and limit line

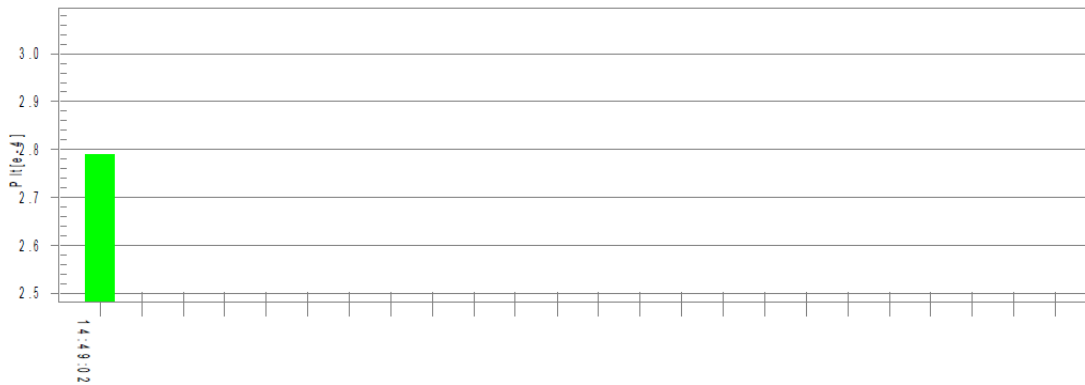

Parameter values recorded during the test:

Vrms at the end of test (Volt):	230.58			
T-max (mS):	0.0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	-0.09	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000	Pass




For adaptor: adapter 2_ FY2401500S2
 BLE, running mode

Test Result: Pass


Status: Test Completed

Pst_i and limit line

European Limits

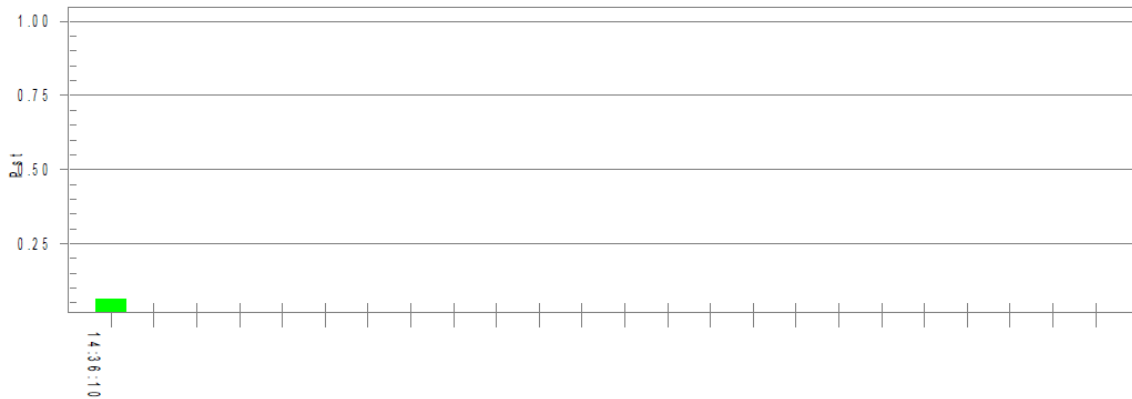

Plt and limit line

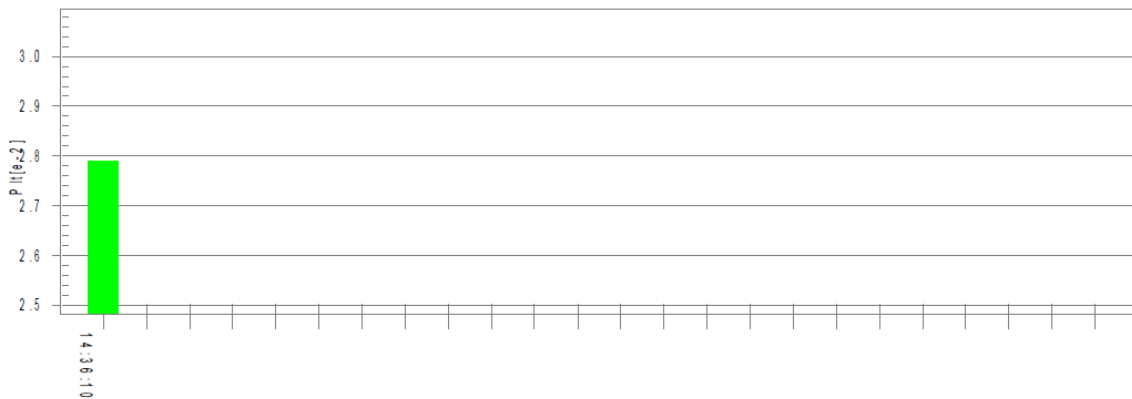

Parameter values recorded during the test:

Vrms at the end of test (Volt):	230.60		
T-max (mS):	0.0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	-0.08	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000 Pass




For adaptor: adapter 2_ FY2401500S2
 Wi-Fi, charging mode

Test Result: Pass


Status: Test Completed

Pst_i and limit line

European Limits

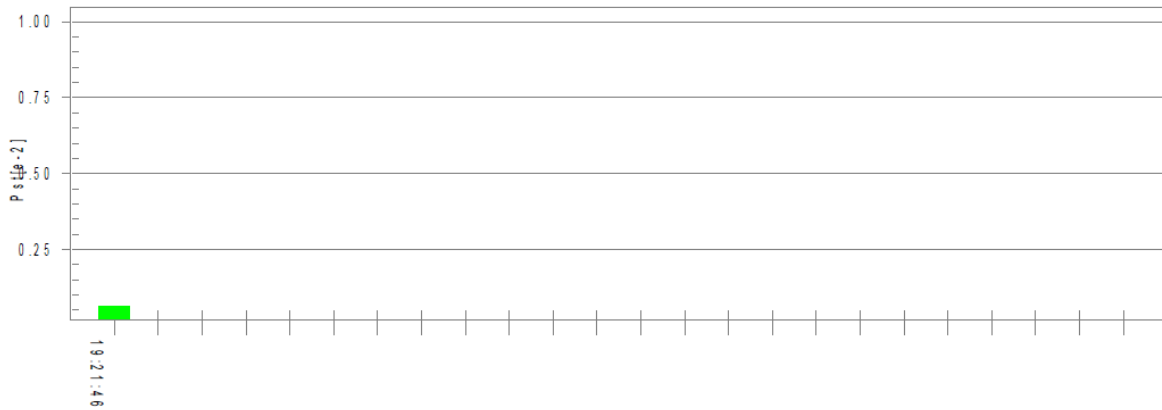

Plt and limit line

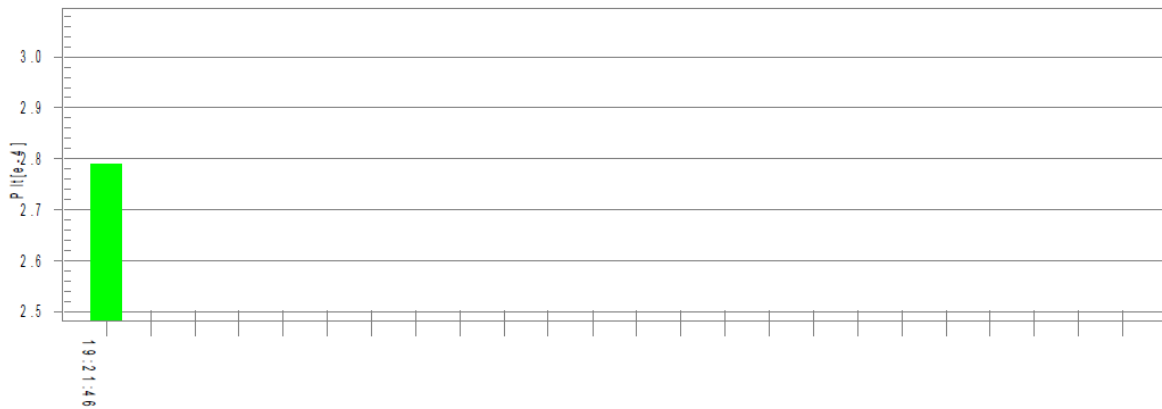

Parameter values recorded during the test:

Vrms at the end of test (Volt):	230.81		
T-max (mS):	0.0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	-0.09	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000 Pass




For adaptor: adapter 2_ FY2401500S2
 Wi-Fi, running mode

Test Result: Pass


Status: Test Completed

Pst_i and limit line

European Limits

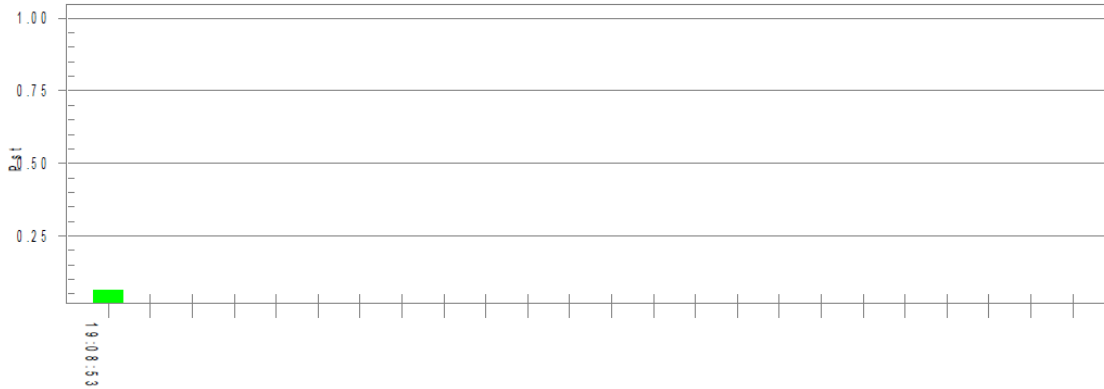

Plt and limit line

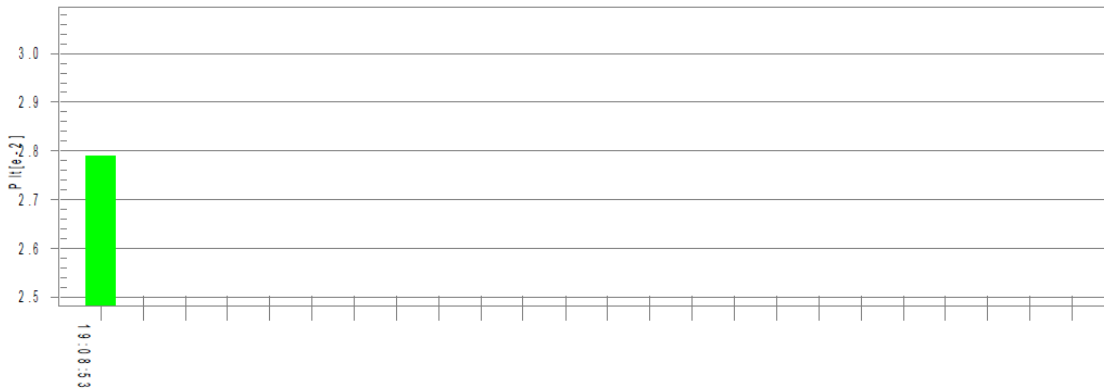

Parameter values recorded during the test:

Vrms at the end of test (Volt):	230.67		
T-max (mS):	0.0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	0.09	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000 Pass



For adaptor: adapter 3_ FY2401500S3


BLE, charging mode

Test Result: Pass


Status: Test Completed

Pst_i and limit line

European Limits

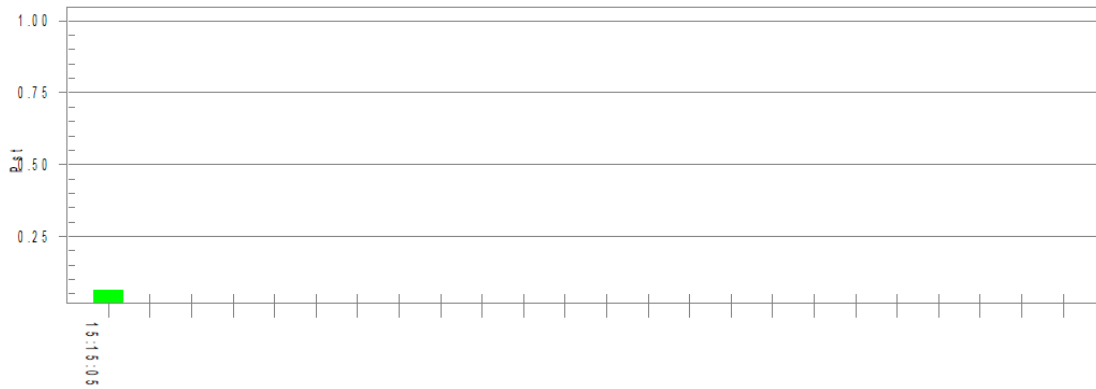

Plt and limit line

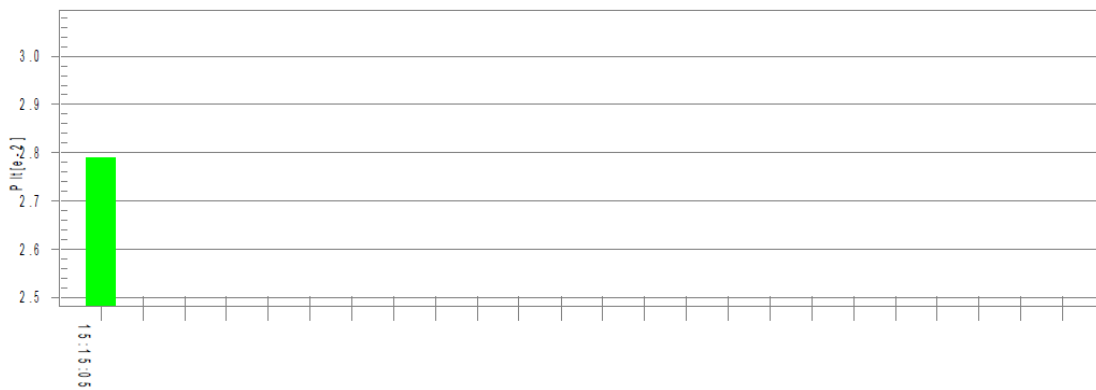

Parameter values recorded during the test:

Vrms at the end of test (Volt):	230.59		
T-max (mS):	0.0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	0.07	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000 Pass




For adaptor: adapter 3_ FY2401500S3
 BLE, running mode

Test Result: Pass


Status: Test Completed

Pst_i and limit line

European Limits

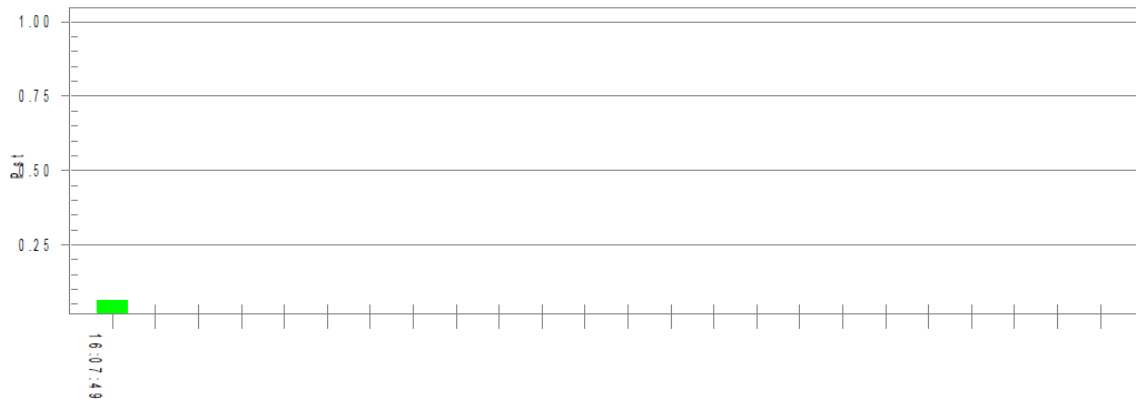

Plt and limit line

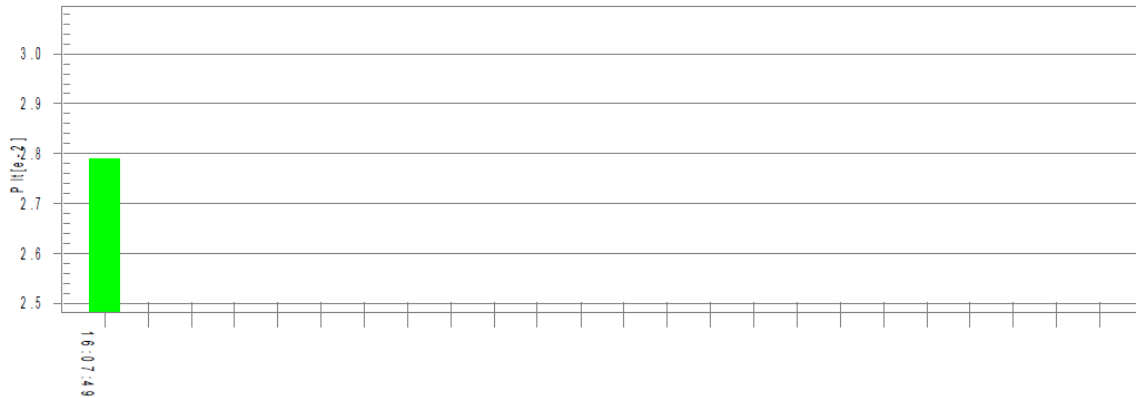

Parameter values recorded during the test:

Vrms at the end of test (Volt):	230.68		
T-max (mS):	0.0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	-0.08	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000 Pass




For adaptor: adapter 3_ FY2401500S3
 Wi-Fi, charging mode

Test Result: Pass


Status: Test Completed

Pst_i and limit line

European Limits

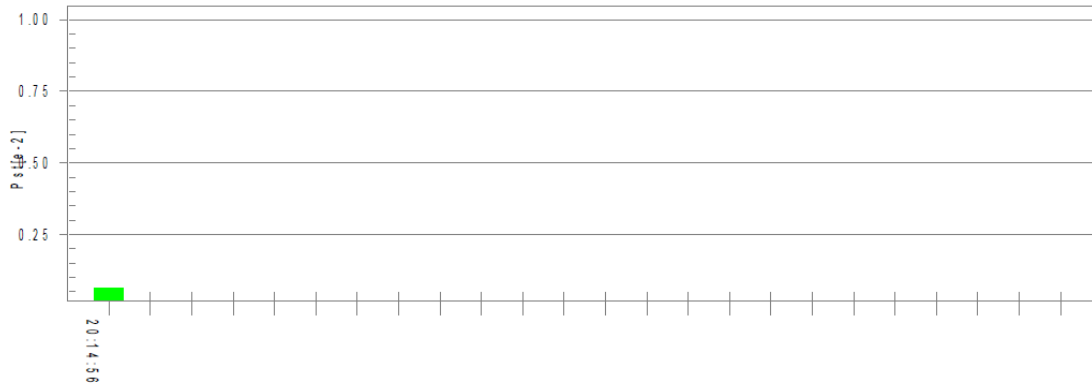

Plt and limit line

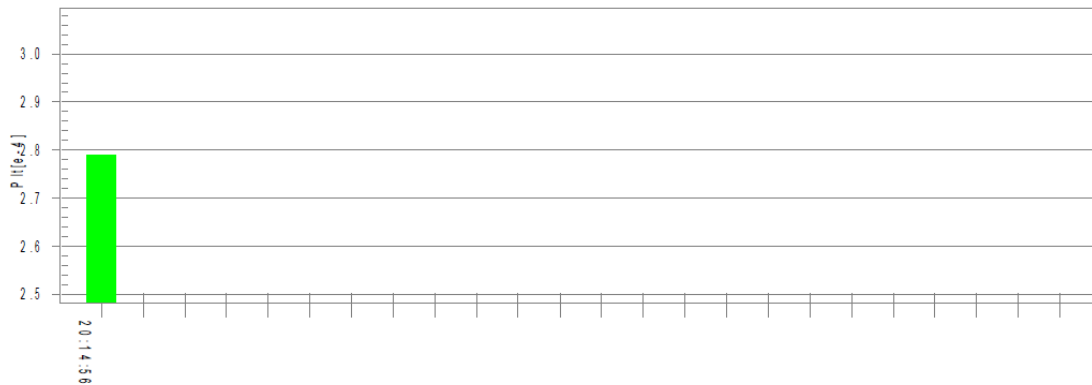

Parameter values recorded during the test:

Vrms at the end of test (Volt):	230.58		
T-max (mS):	0.0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	0.08	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000 Pass




For adaptor: adapter 3_ FY2401500S3
 Wi-Fi, running mode

Test Result: Pass


Status: Test Completed

Pst_i and limit line

European Limits

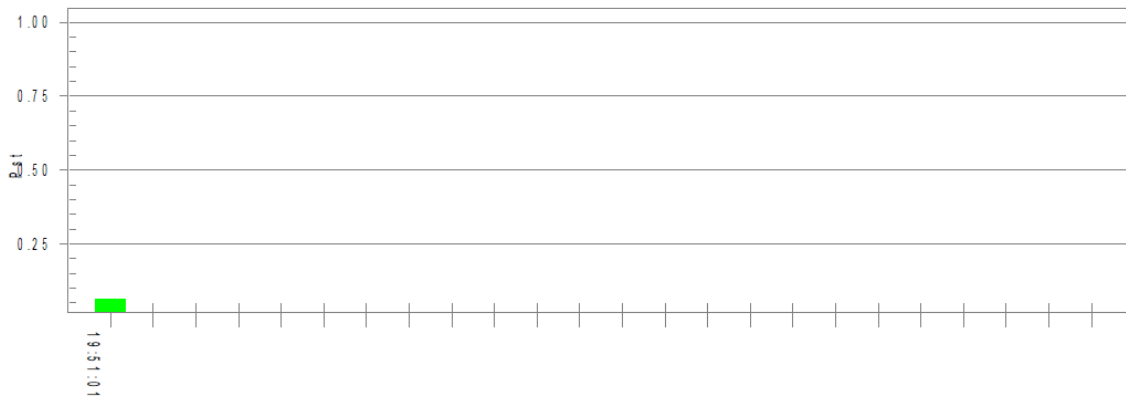

Plt and limit line

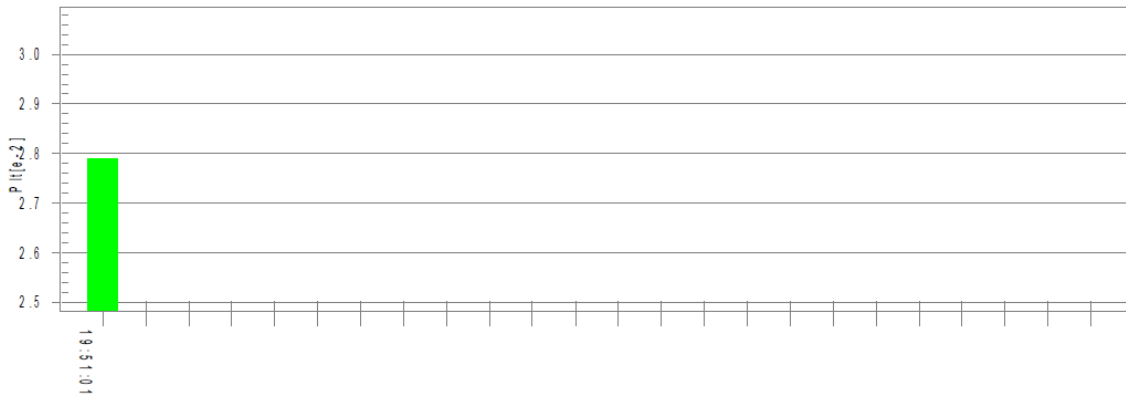

Parameter values recorded during the test:

Vrms at the end of test (Volt):	230.70		
T-max (mS):	0.0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	-0.09	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000 Pass



Test setup

2.4.8 Test Location

This test was carried out in Harmonic Flicker Test area.

2.5 Immunity to Electrostatic Discharge (Enclosure Port)

2.5.1 Specification Reference

ETSI EN 301 489-1: V2.2.3 (2019-11), Clause 9.3
 EN 55014-2:2015, Clause 5.1

2.5.2 Equipment Under Test

LLS BL300i/YG (Remark: EUT with Wi-Fi) , LLS BL300B/YG (Remark: EUT with BLE)

2.5.3 Date of Test


15/11/2021

2.5.4 Test Method

The equipment under test including associated cabling was configured on but insulated from, using a 0.5mm isolator, a horizontal coupling plane fitted to the top of a 0.8m non-conductive table for table-top equipment; and on a 0.1m insulated support for floor standing equipment; above a ground reference plane all within a test laboratory.

Using the air discharge method for non-metallic parts, contact discharge method for metallic parts with both vertical and horizontal couple plane discharge methods for the sides of the equipment under test, the required electrostatic discharge voltage levels in both voltage polarities were applied at the detailed pulse repartition rate.

During this testing any anomalies in the equipment under tests performance was recorded.

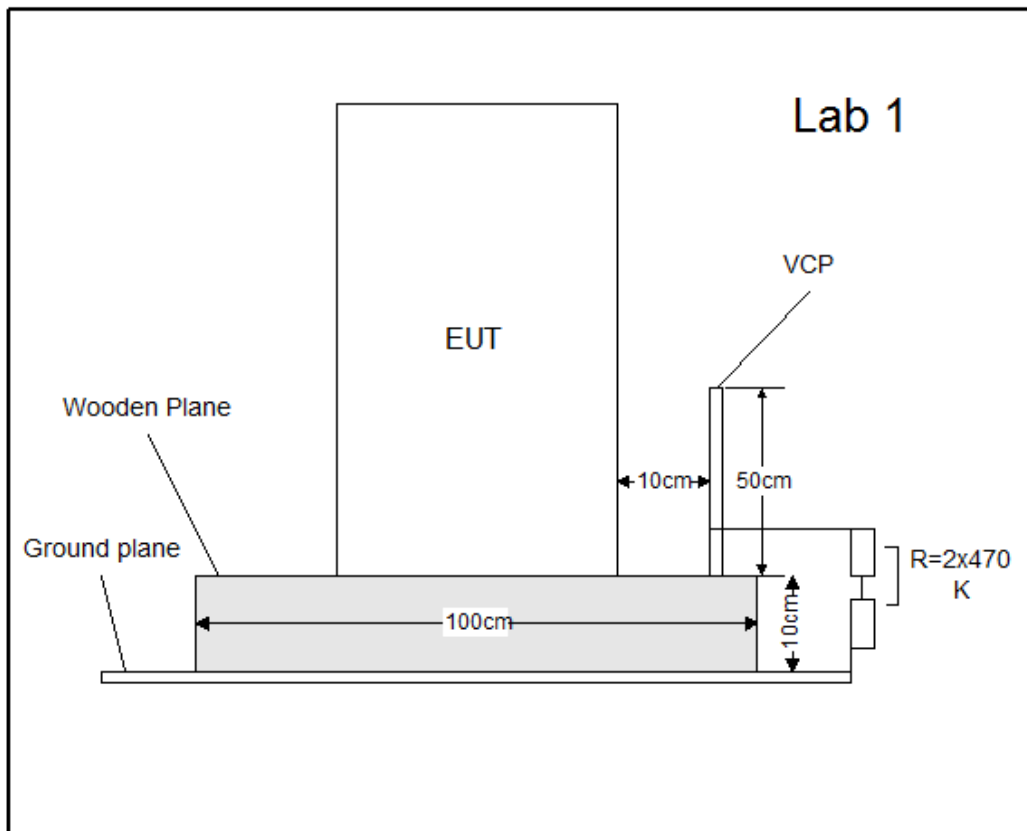



2.5.5 Environmental Conditions

Ambient Temperature 21.0 °C
 Relative Humidity 37.0 %
 Atmospheric Pressure 1012.0 mbar

2.5.6 Specification Limits

Required Test Levels				Performance Criteria
Discharge type	Discharge Level (kV)		Number of discharges per location (each polarity)	
	Positive	Negative		
Air – Direct	2, 4 and 8	2, 4 and 8	<10>	B
Contact – Direct	2 and 4	2 and 4	<10>	B
Contact – Indirect	2 and 4	2 and 4	<10>	B

2.5.7 Test Results


Results for Configuration and Mode: AC Powered/ Power on (charging mode/running mode).

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

ID	Test Point	Discharge	Results									
			2kV		4kV		6kV		8kV		15kV	
			+	-	+	-	+	-	+	-	+	-
	VCP	Contact	✓	✓	✓	✓						
	Gap,button	Air	✓	✓	✓	✓			✓	✓		
	Bolt	Contact	✓	✓	✓	✓						

Key to Results	
✓	The EUTs performance was not impacted when the ESD pulse was applied.
✓*	No discharge occurred at this point when the ESD pulse was applied
Ox	
Fx	
N/A	Not Appliance

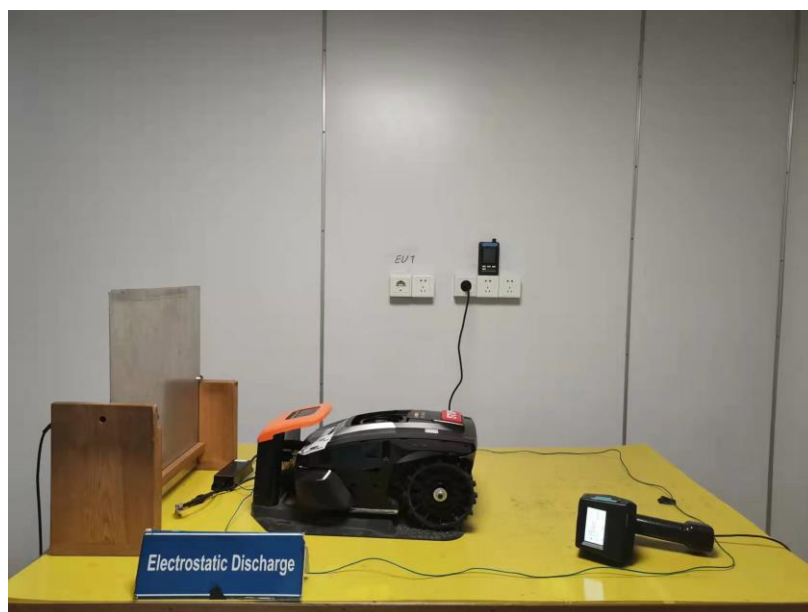

Test Setup

2.5.8 Test Location

This test was carried out in shielded room D.

2.6 Immunity to Radio Frequency Electromagnetic Field (Enclosure Port)

2.6.1 Specification Reference

ETSI EN 301 489-1: V2.2.3 (2019-11), Clause 9.2
 EN 55014-2:2015, Clause 5.3

2.6.2 Equipment Under Test

LLS BL300i/YG (Remark: EUT with Wi-Fi) , LLS BL300B/YG (Remark: EUT with BLE)

2.6.3 Date of Test


15/11/2021

2.6.4 Test Method

The equipment under test including associated cabling was configured, on a 0.8 m non-conductive table for table-top equipment and on a 0.1 m insulated support for floor standing equipment; with a pre-calibrated semi anechoic chamber.

All four side of the equipment under test were subjected to the required RF field strength, modulated as described, swept over the frequency range of test with the antenna positioned in both horizontal and vertical polarizations.

During this testing any anomalies in the equipment under tests performance was recorded.

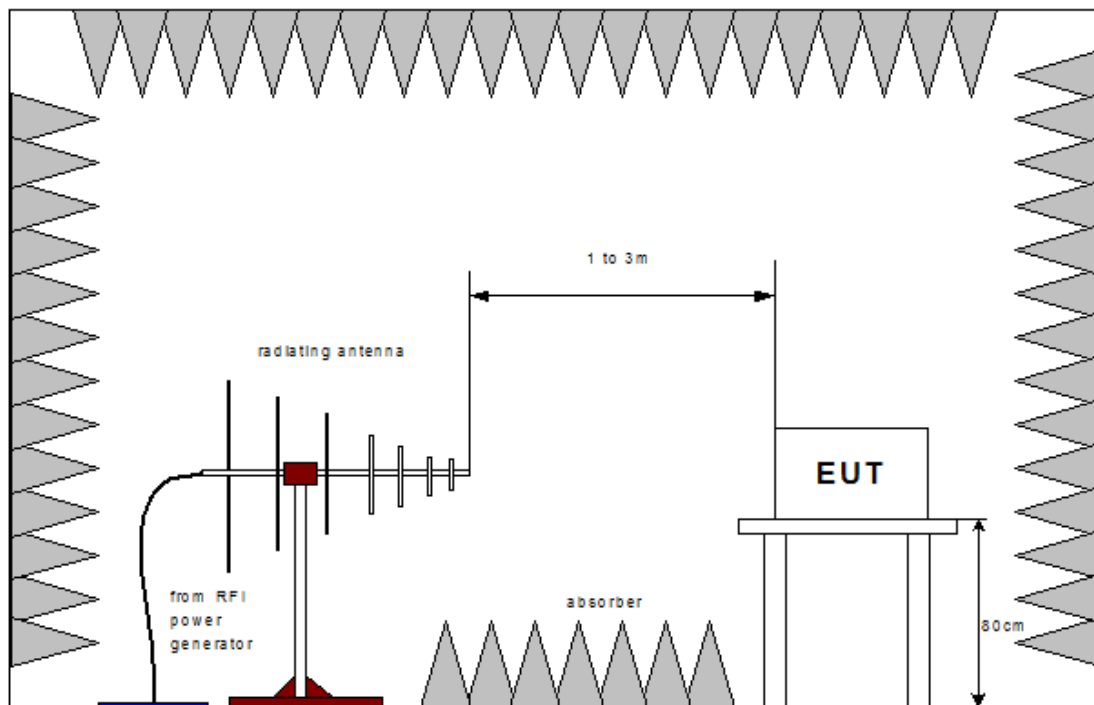



2.6.5 Environmental Conditions

Ambient Temperature 21.0 °C
 Relative Humidity 31.0 %
 Atmospheric Pressure 1012.0 mbar

2.6.6 Specification Limits

Required Test Levels					Performance Criteria
Frequency Range (MHz)	Level (V/m)	Modulation	Step Size (%)	Dwell (s)	
80 to 6000	3	AM (80 %,1 kHz, sine wave)	1	3	A
Supplementary information:					
Note 1. EUT powered at one of the Nominal input voltages and frequencies					
Note 2. If the wanted signal is modulated at 1 000 Hz, then an audio signal of 400 Hz shall be used					



2.6.7 Test Results

Results for Configuration and Mode: AC Powered/ Power on (Charging mode/running mode).

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

Tabulated Results for RF Electromagnetic Field 80 - 6000 MHz				
Side of the equipment under test	Antenna polarization	Test Level	Dwell Time	Result
Front	horizontal	3 V/m	3 s	Pass PC A
Front	vertical	3 V/m	3 s	Pass PC A
Rear	horizontal	3 V/m	3 s	Pass PC A
Rear	vertical	3 V/m	3 s	Pass PC A
Left	horizontal	3 V/m	3 s	Pass PC A
Left	vertical	3 V/m	3 s	Pass PC A
Right	horizontal	3 V/m	3 s	Pass PC A
Right	vertical	3 V/m	3 s	Pass PC A

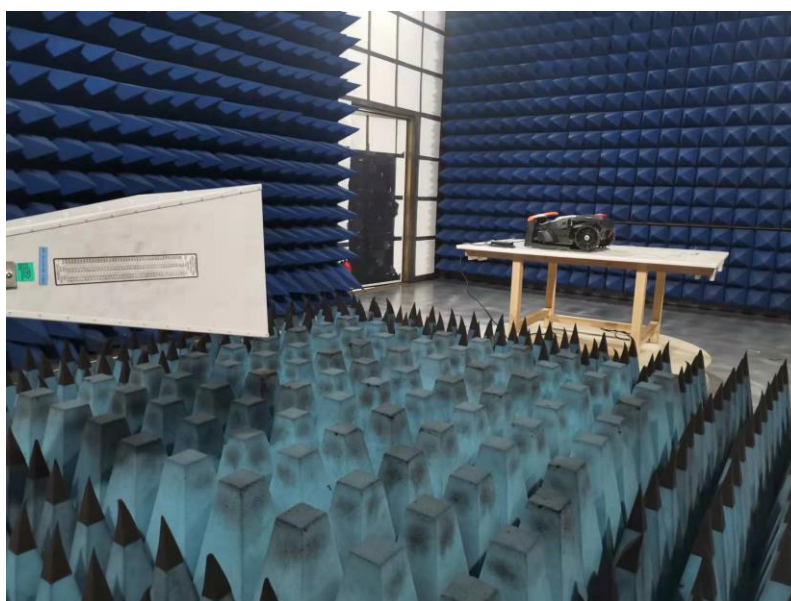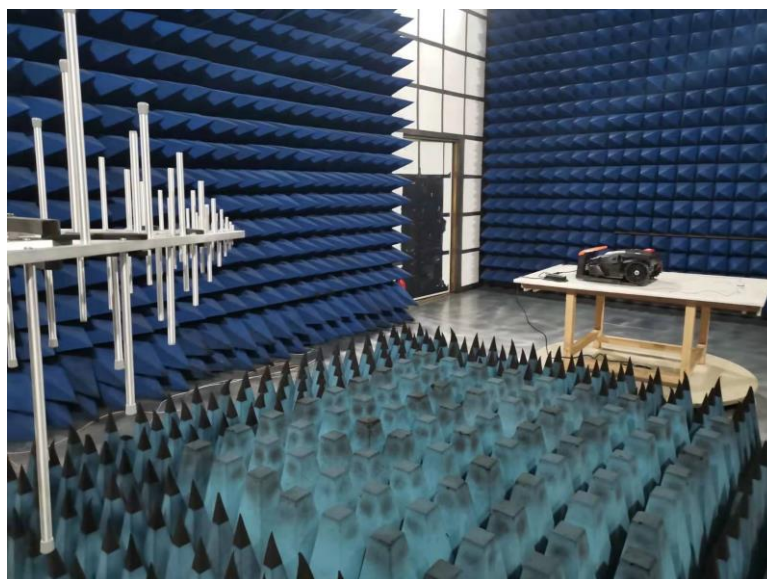

Test Setup

2.6.8 Test Location

This test was carried out in 3m anechoic chamber.

2.7 Immunity to Fast Transients

2.7.1 Specification Reference

ETSI EN 301 489-1: V2.2.3 (2019-11), Clause 9.4
 EN 55014-2:2015, Clause 5.2

2.7.2 Equipment Under Test

LLS BL300i/YG (Remark: EUT with Wi-Fi) , LLS BL300B/YG (Remark: EUT with BLE)

2.7.3 Date of Test


15/11/2021

2.7.4 Test Method

The equipment under test including associated cabling was configured on but insulated from, using a 0.1 m isolator, a horizontal coupling plane fitted to the top of a 0.8 m non-conductive table for table-top equipment; and on a 0.1 m insulated support for floor standing equipment; above a ground reference plane all within a test laboratory.

Using a CDN for power ports, capacitive coupling clamp for signal and control ports and a 33nF coupling capacitor for earth ports, the required fast transient burst voltage levels in both voltage polarities were applied at the detailed pulse repartition rate and duration of test.

During this testing any anomalies in the equipment under tests performance was recorded.

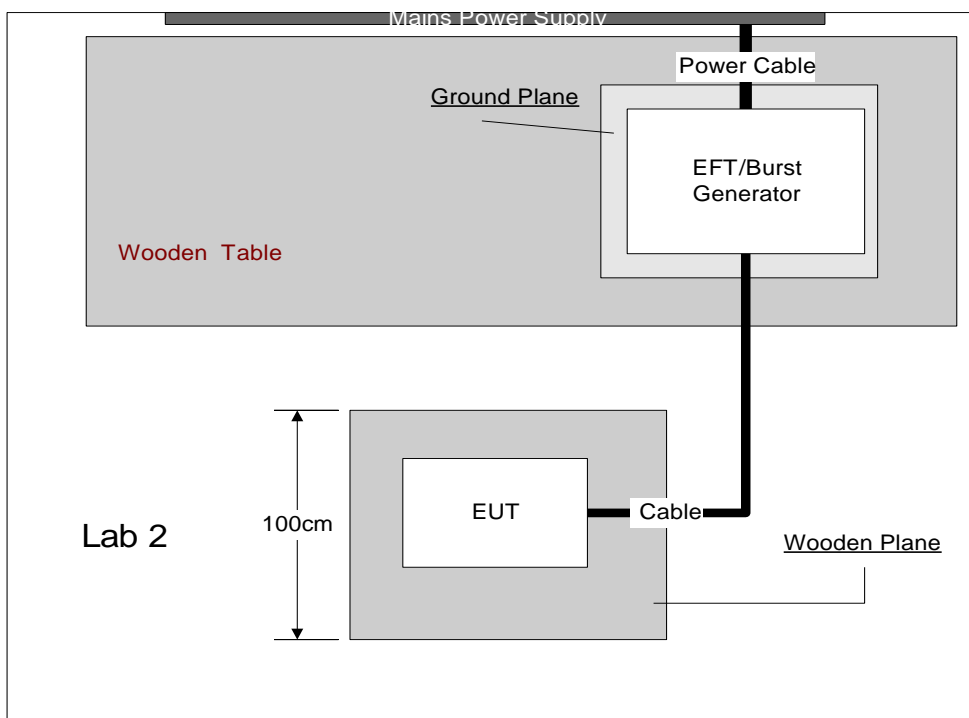



2.7.5 Environmental Conditions

Ambient Temperature 21.0 °C
 Relative Humidity 31.0 %
 Atmospheric Pressure 1012.0 mbar

2.7.6 Specification Limits

Required Test Levels					Performance Criteria
Line Under Test	Level (±kV)	Repetition Rate (kHz)	Test Duration	Coupling Method	
AC Power Port	1.0	5	2 min per polarity	Direct	B
Supplementary information: Note 1. EUT powered at one of the Nominal input voltages and frequencies					

2.7.7 Test Results

Results for Configuration and Mode: AC Powered/ Power on (Charging mode/running mode).

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

Tabulated Results for Fast Transient Burst Immunity					
Line under test	Test Level (kV)	Repetition Rate	Test Duration	Coupling Method	Result
AC input Power lines	± 1.0 kV	5 kHz	2 min	CDN	Pass PC A



Test Setup

2.7.8 Test Location

This test was carried out in shielded room G.

2.8 Immunity to Surges (AC Power Port)

2.8.1 Specification Reference

ETSI EN 301 489-1: V2.2.3 (2019-11), Clause 9.8
 EN 55014-2:2015, Clause 5.6

2.8.2 Equipment Under Test

LLS BL300i/YG (Remark: EUT with Wi-Fi) , LLS BL300B/YG (Remark: EUT with BLE)

2.8.3 Date of Test


08/11/2021

2.8.4 Test Method

The equipment under test including associated cabling was configured, on a 0.8 m non-conductive table for table-top equipment and on a 0.1 m insulated support for floor standing equipment above a ground reference plane all within a test laboratory.

Using CDNs for power ports and appropriate coupling methods for applicable signal and control ports, the required number of surges was applied for each surge voltage level using both positive and negative surge voltage polarities. Surges were applied at the power line frequency phase angles and repartition rates detailed.

During this testing any anomalies in the equipment under tests performance was recorded.

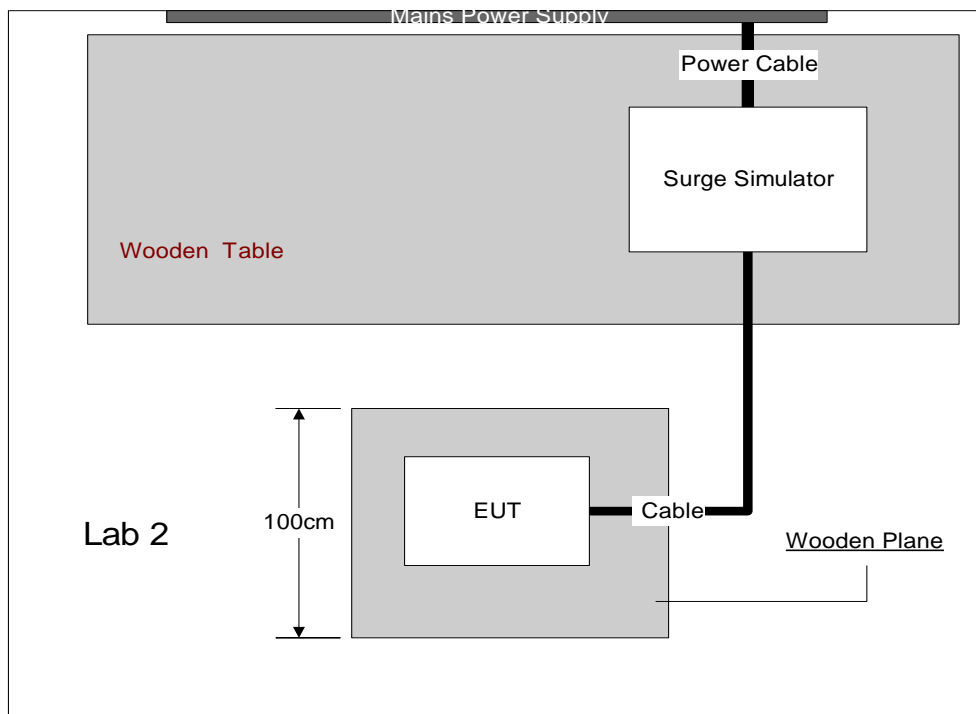



2.8.5 Environmental Conditions

Ambient Temperature 24.1 °C
 Relative Humidity 49.8 %
 Atmospheric Pressure 1005.6 mbar

2.8.6 Specification Limits

Characteristics	Test Levels	Performance Criteria
Wave- shape data Test levels line to line with 2Ω impedance	1.2/50 μs ± 1.0 kV	B
Note In addition to the specified test level, all lower levels as detailed in IEC 61000-4-5 should also be satisfied.		

2.8.7 Test Results

Results for Configuration and Mode: AC Powered/ Power on (charging mode/running mode).

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

Tabulated Results for Surge Immunity (Power Ports)							
Line Name	Coupling	Level	Polarity	Phase Angle	No of Pulses	Repetition Rate	Result
L-N	Live to Neutral	1.0kV	+	90 deg	5	60 sec	Pass PC A
L-N	Live to Neutral	1.0kV	-	270 deg	5	60 sec	Pass PC A



Test Setup

2.8.8 Test Location

This test was carried out in shielded room G.

2.9 Immunity to Radio Frequency

2.9.1 Specification Reference

ETSI EN 301 489-1: V2.2.3 (2019-11), Clause 9.5
 EN 55014-2:2015, Clause 5.3

2.9.2 Equipment Under Test

LLS BL300i/YG (Remark: EUT with Wi-Fi) , LLS BL300B/YG (Remark: EUT with BLE)

2.9.3 Date of Test

08/11/2021


2.9.4 Test Method

The equipment under test was configured, on but insulated from, using a 0.1 m isolator, a horizontal coupling plane fitted to the top of a 0.8 m non-conductive table for table-top equipment; and on a 0.1 m insulated support for floor standing equipment; above a ground reference plane all within a test laboratory.

All associated cabling was configured, on but insulated from, using a 50 mm isolator, the same horizontal coupling plane as the equipment under test.

Using CDNs, EM Clamps or current clamps as appropriate, the power ports and applicable signal and control ports were subjected to the required, pre calibrated RF injected signal strength, modulated as described, swept over the frequency range of test.

During this testing any anomalies in the equipment under tests performance was recorded.

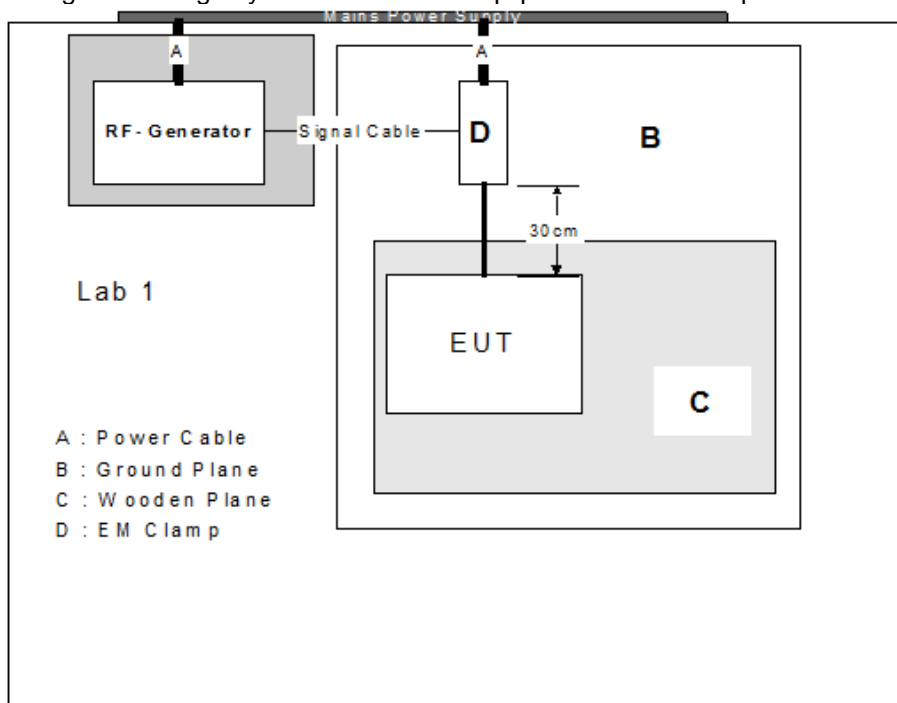



2.9.5 Environmental Conditions

Ambient Temperature 23.8 °C
 Relative Humidity 52.5 %
 Atmospheric Pressure 1009.2 mbar

2.9.6 Specification Limits

Required Test Levels						Performance Criteria
Line Under Test	Frequency Range (MHz)	Level (V)	Modulation	Step Size (%)	Dwell (s)	
AC Power Port	0.15 to 230	3	AM (80 %,1 kHz, sine wave)	1	3	A
Supplementary information: Note 1. EUT powered at one of the Nominal input voltages and frequencies.						


2.9.7 Test Results

Results for Configuration and Mode: AC Powered/ Power on (Charging mode/running mode).

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

Tabulated Results for Injected current						
Line under test	Test Level	Step	Dwell Time	Coupling Method	Modulation	Result
AC Power Line	3V	1%	3s	CDN	1KHZ 80%	Pass PC A

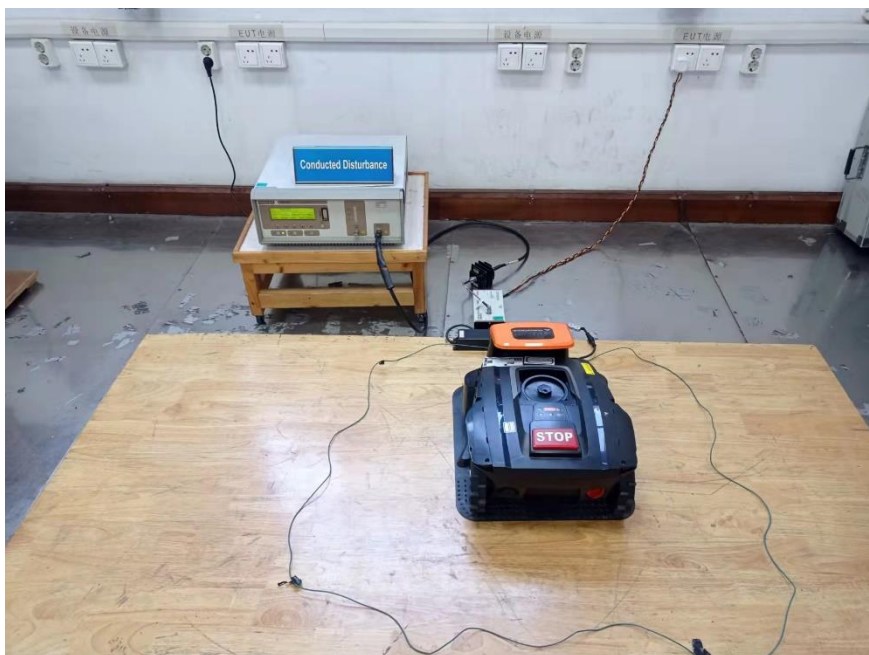

Test Setup

2.9.8 Test Location

This test was carried out in shielded room G.

2.10 Immunity to Voltage dips and interruptions (AC Power Port)

2.10.1 Specification Reference

ETSI EN 301 489-1: V2.2.3 (2019-11), Clause 9.7
 EN 55014-2:2015, Clause 5.7

2.10.2 Equipment Under Test

LLS BL300i/YG (Remark: EUT with Wi-Fi) , LLS BL300B/YG (Remark: EUT with BLE)


2.10.3 Date of Test

08/11/2021

2.10.4 Test Method

The equipment under test including associated cabling was configured, on a 0.8 m non-conductive table for table-top equipment and on a 0.1 m insulated support for floor standing equipment above a ground reference plane all within a test laboratory.

Using a programmable power supply the equipment under test was subjected to the detailed supply voltage dips and interruptions. The required supply phase synchronization and test repetition rate, detailed, was controlled by the programmable power supply. During this testing any anomalies in the equipment under tests performance was recorded.

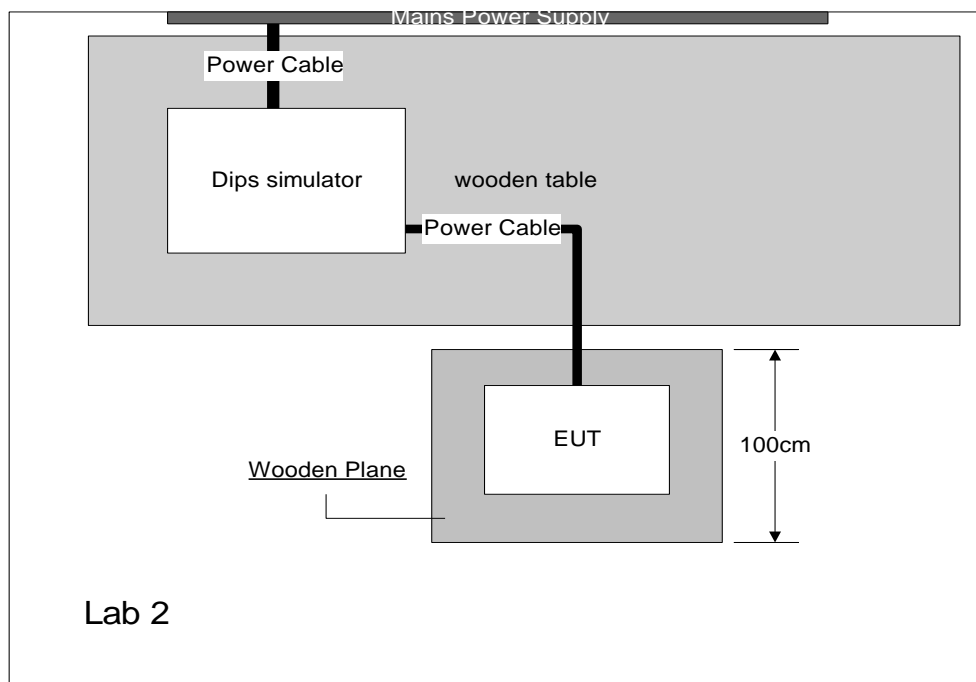



2.10.5 Environmental Conditions

Ambient Temperature 29.8 °C
 Relative Humidity 53.8 %
 Atmospheric Pressure 1001.6 mbar

2.10.6 Specification Limits

Required Test Levels			Performance Criteria
Test	Test Level % of nominal Voltage	Duration (ms) (cycles)	
Voltage Dip	0	½ cycle (50 Hz)	B
Voltage Dip	40	10 cycle	B
Voltage Dip	70	25 cycles (50 Hz)	B
Short Interruption	100	250 cycles (50 Hz)	C
Supplementary information: Note 1. EUT powered at one of the Nominal input voltages and frequencies			

2.10.7 Test Results

Results for Configuration and Mode: AC Powered/ Power on (Charging mode/running mode).

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

Tabulated Results for Voltage Dip and Short Interruption					
Line under test	Vnom	Operating Frequency	Test Level	Duration	Result
Power line	230 Vac	50 Hz	0% of Vnom	½ cycle	Pass PC A
Power line	230 Vac	50 Hz	40% of Vnom	10 cycles (50Hz)	Pass PC A
Power line	230 Vac	50 Hz	70% of Vnom	25 cycles (50Hz)	Pass PC A
Power line	230 Vac	50 Hz	100% of Vnom	25 cycles (50Hz)	Pass PC C*

*Note: When adding the voltage interruption of 100% of Vnom of 5s, the EUT stops working, once removing the interference, it can restore its normal mode manually.



Test Setup

2.10.8 Test Location

This test was carried out in shielded room G.

3 Test Equipment Information

3.1 General Test Equipment Used

Instrument	Manufacturer	Type No	TE No	Calibration Date	Calibration Due
Conducted Emission					
EMI Test Receiver	Rohde & Schwarz	ESHS30	707/639701	2021.05.07	2022.05.06
LISN	Schwarzbeck	NSLK8127	487/601428	2020.12.11	2021.12.10
Radiated Emissions					
EMI Test Receiver	Rohde & Schwarz	ESU8	487/630408	2020.12.11	2021.12.10
Antenna	Schwarzbeck	VULB 9168	487/621840	2021.07.24	2022.07.23
Amplifier	Sonoma	310N	487/401310	2020.12.11	2021.12.10
Semi-anechoic Chamber	TDK	10m	487/770201	--	--
EMI Test Receiver	Rohde & Schwarz	ESW8	487/631911	2021.05.07	2022.05.06
Preamplifier	BONN Elektronik	BLMA0118-1M	487/401411	2021.05.07	2022.05.06
Horn antenna	ETS	3115	487/621838	2020.12.03	2021.12.02
Semi-anechoic Chamber	Jiangsu Jinlida	3m	487/770902	--	--
Harmonic and Flicker					
AC Power Supply Testing System	California Instruments	MX45-3PI	487/681243	2021.09.17	2022.09.16
Immunity					
ESD Simulator	HAEFELY	ONYX 30	487/751520	2021.09.17	2022.09.16
Compact immunity test system	Schaffner	AXOS 5	487/751822	2021.07.02	2022.07.01
RF-Generator	Schaffner	NSG 2070	487/391121	2021.05.07	2022.05.06
Coupling/decoupling Network	TeseQ	CDN M016	487/571539	2021.05.07	2022.05.06
Voltage Drop Generator	EM test	UCS500N5-PFS	487/751117	2020.12.11	2021.12.10

Signal Generator	Rohde & Schwarz	SMB-100A	487/391120	2020.12.07	2021.12.06
Power Amplifier	TESEQ	CBA1G-500	487/400908	2020.12.07	2021.12.06
Power Amplifier	TESEQ	CBA3G-100	487/400909	2020.12.07	2021.12.06
Power Meter	Rohde & Schwarz	NRP-2	487/741156	2020.12.07	2021.12.06
Coupler	Amplifier Research	DC7144A	487/571117	2020.12.07	2021.12.06
Coupler	Amplifier Research	DC6180A	487/571116	2020.12.07	2021.12.06
Antenna	Schwarzbeck	STLP 9128Ds	487/621432	2021.04.11	2023.04.10
Antenna	Schwarzbeck	BBHA 9120 E	487/621535	2021.04.11	2023.04.10
Power Amplifier	Rohde & Schwarz	BBA150	487/401816	2021.09.17	2022.09.16

4 Measurement Uncertainty


For a 95% confidence level, the measurement uncertainties for defined systems are:


Test Name	Measurement Uncertainty
Conducted Disturbance at Mains Terminals	150 kHz to 30 MHz, LISN, ± 3.7 dB
Radiated Disturbance	30 MHz to 1 GHz, ± 3.88 dB 1 GHz to 40 GHz, ± 3.58 dB
Electrostatic discharge immunity test	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-2
Electrical fast transient /burst immunity test	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-4
Immunity to conducted disturbances, induced by radio-frequency fields	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-6
Radiated, radio-frequency, electromagnetic field immunity test	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-3
Surge immunity test	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-5
Voltage dips, short interruptions and voltage variations immunity tests	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-11



Measurement Uncertainty Decision Rule



Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2007, clause 4.4.3 and 4.5.1.


5 Photographs


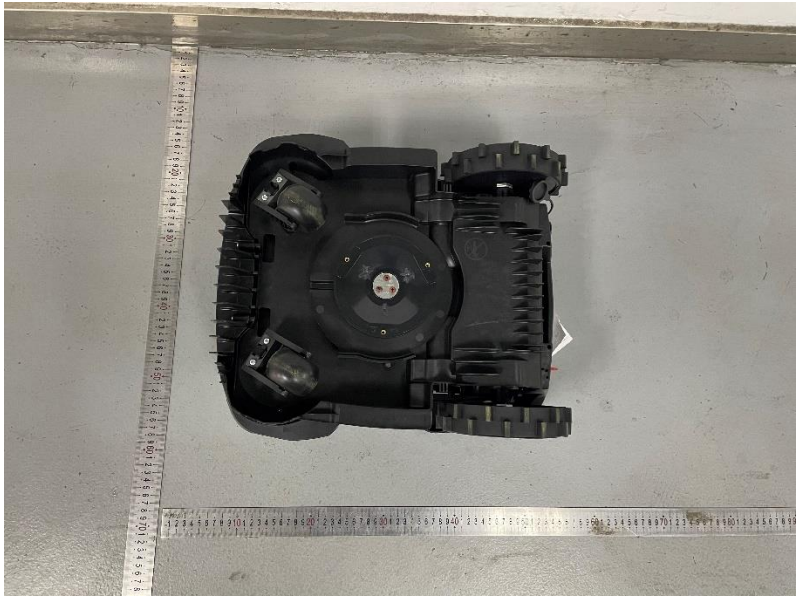


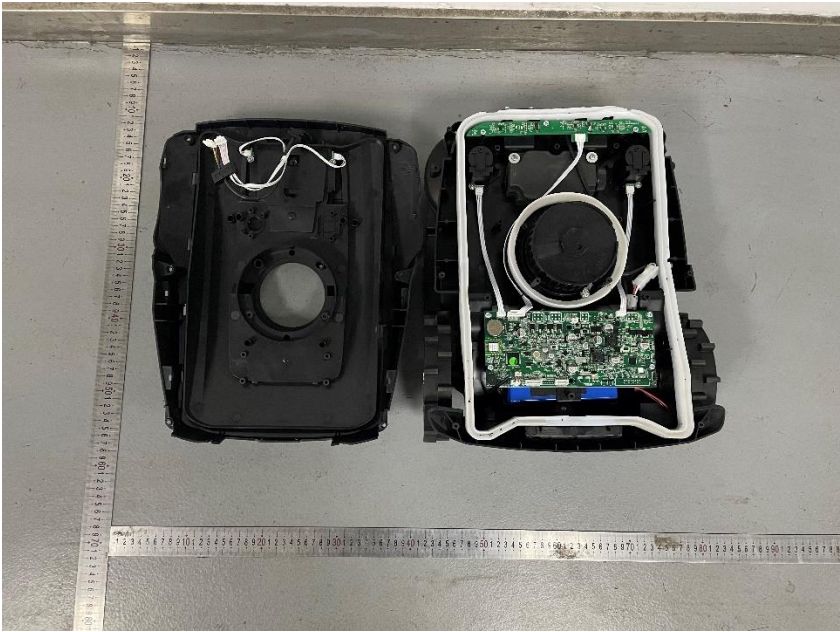

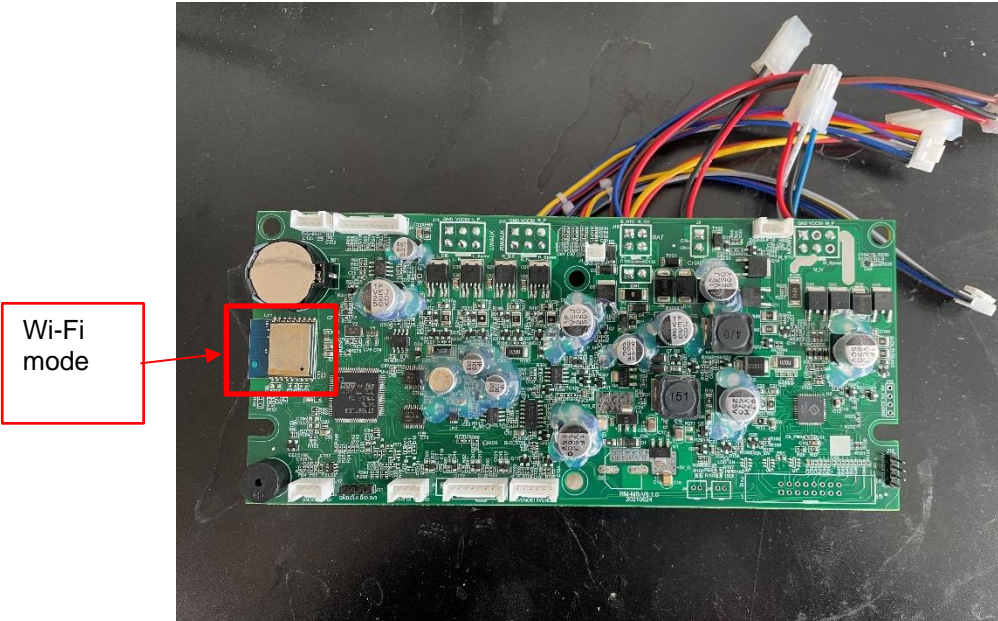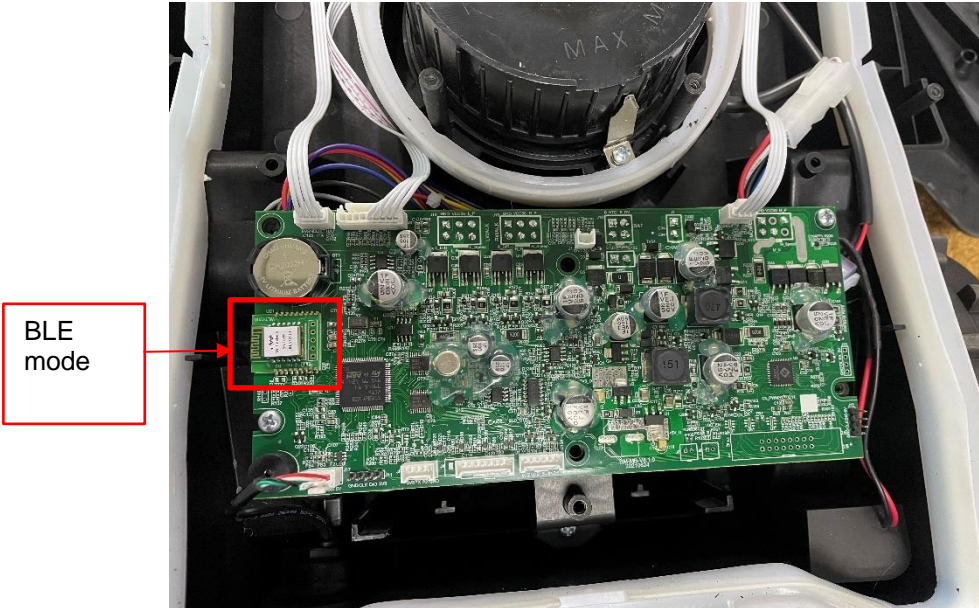


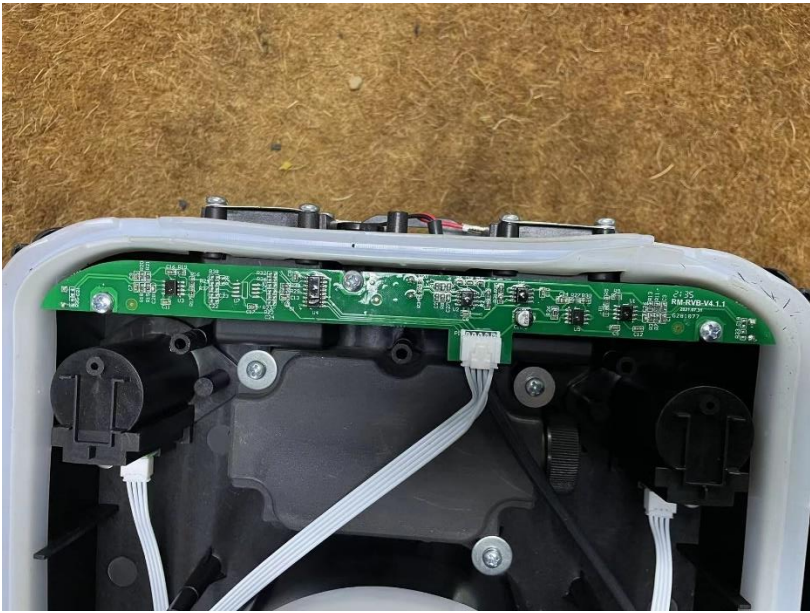
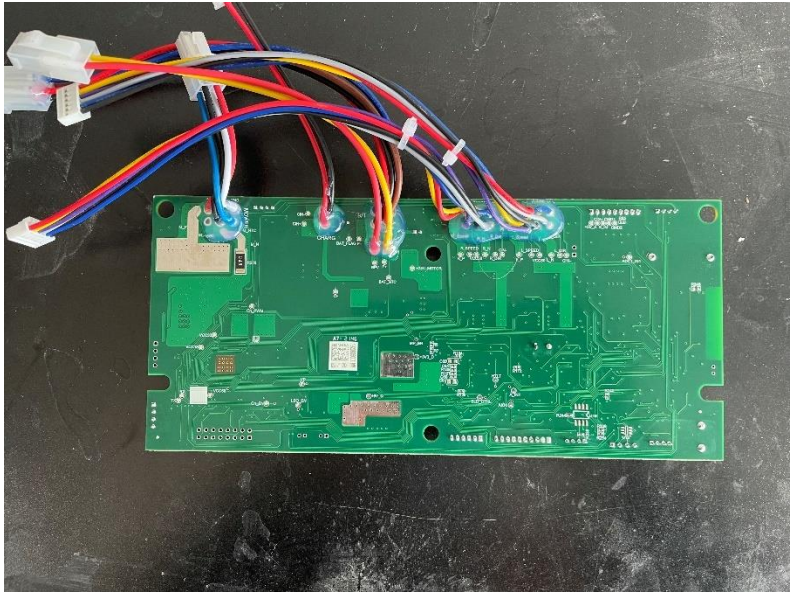



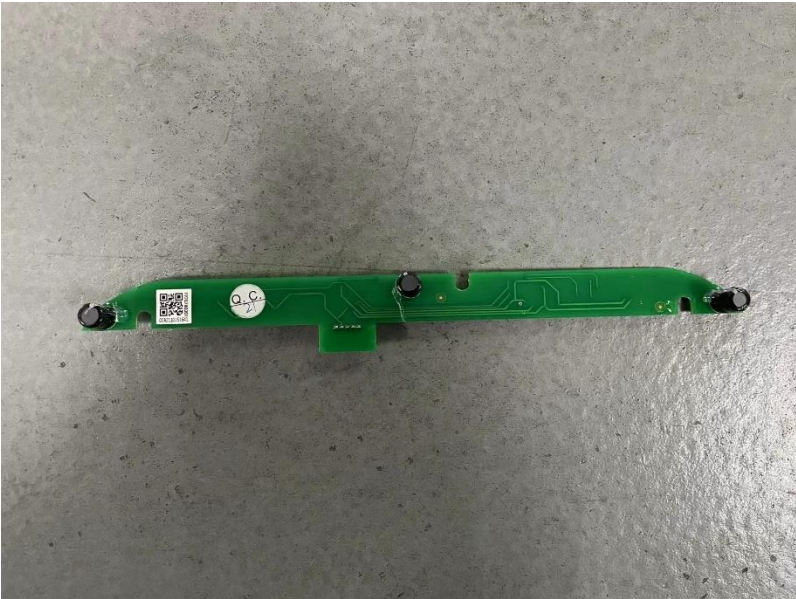


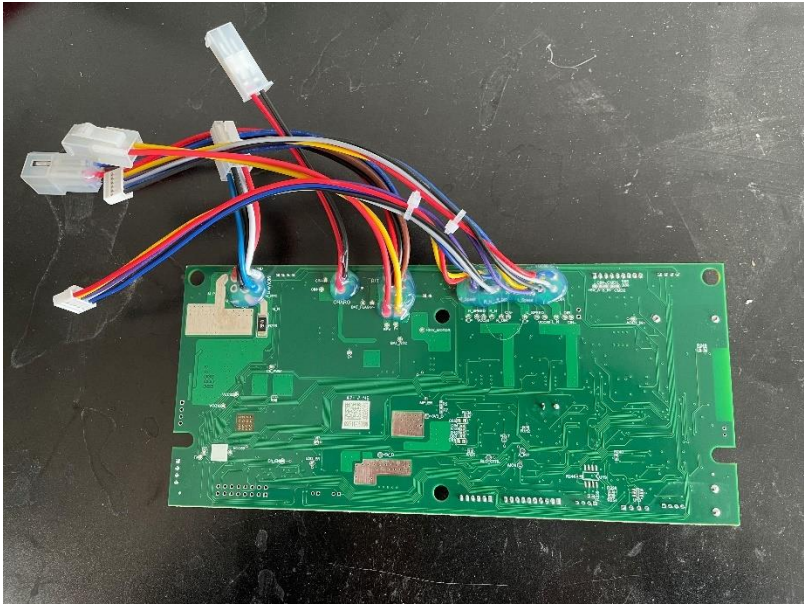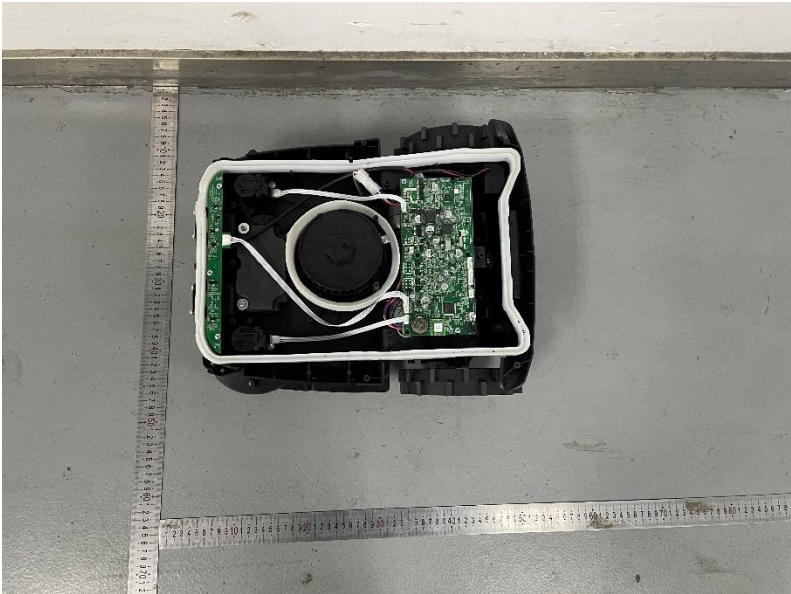



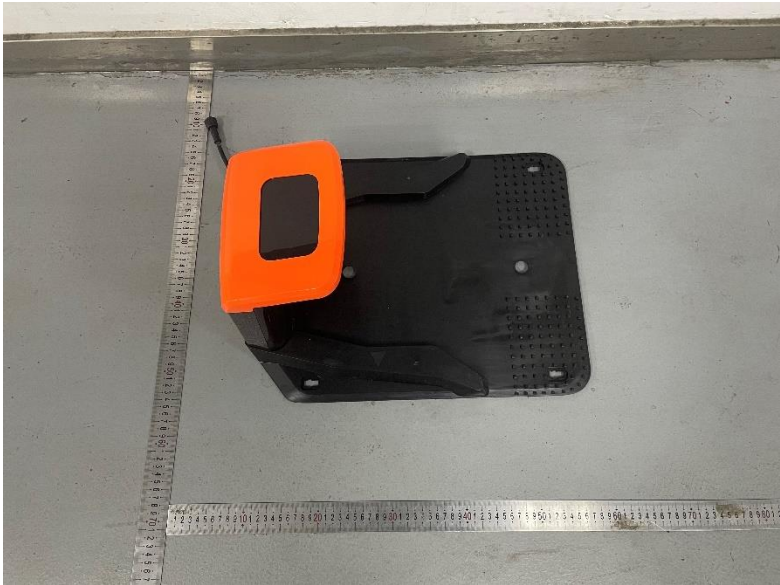

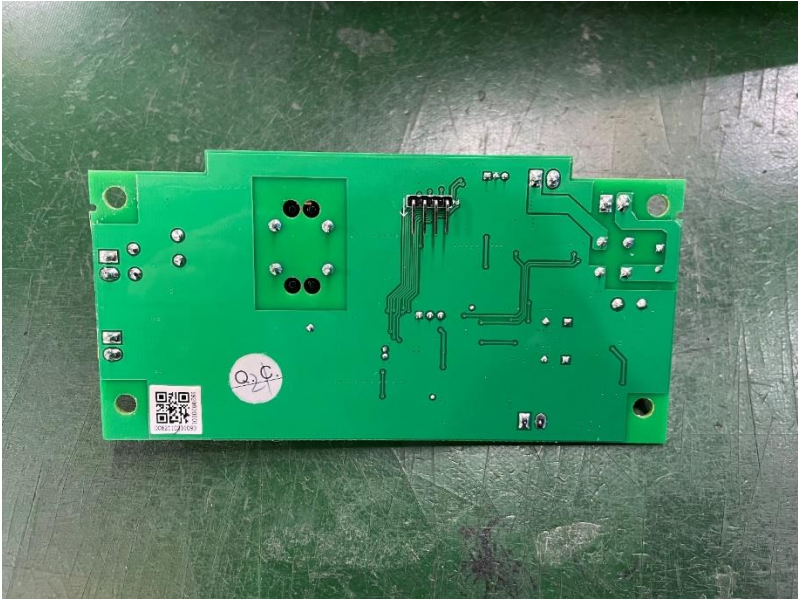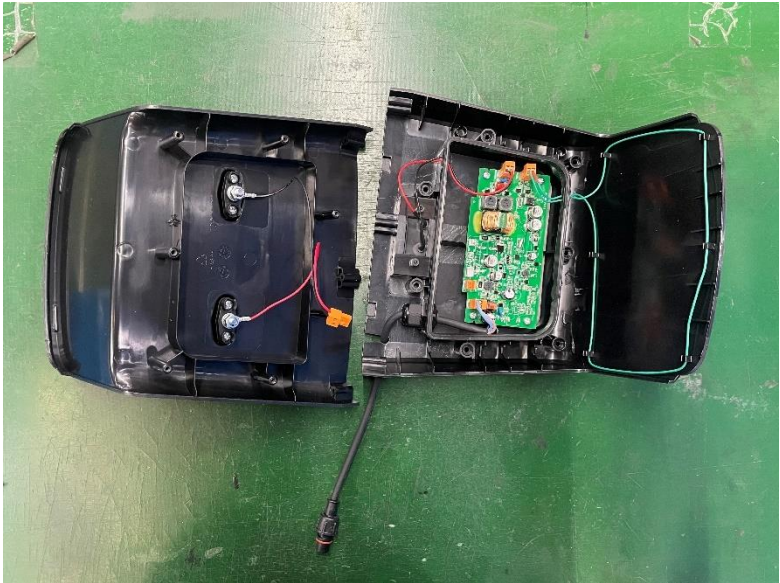

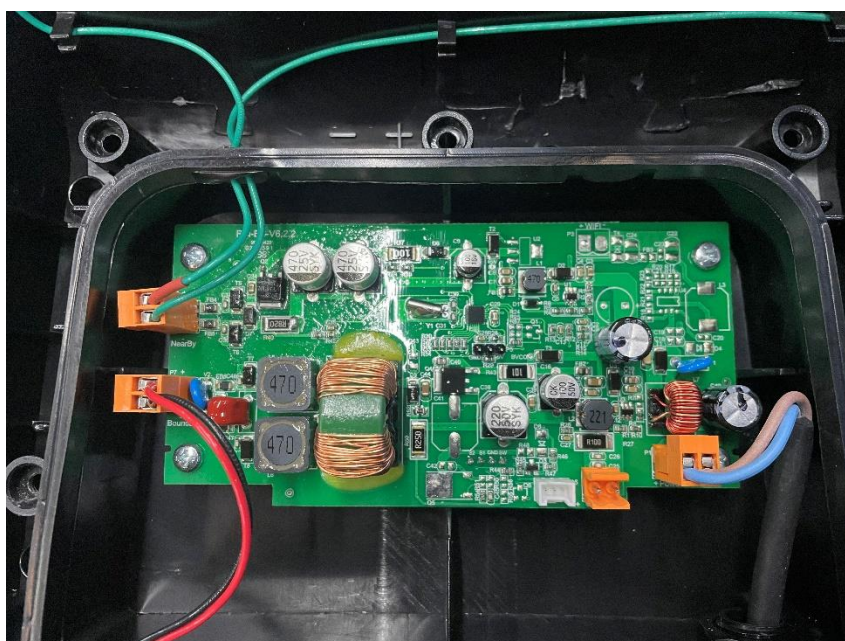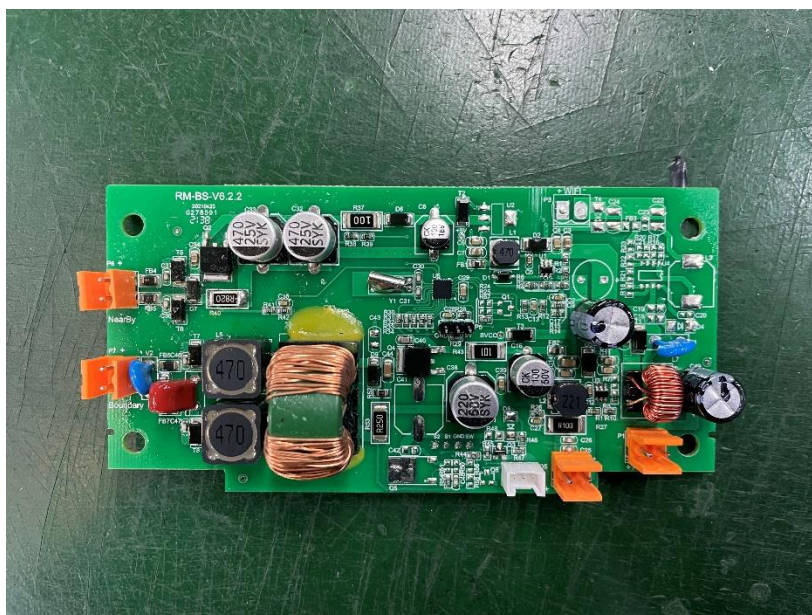

Other photos should be referred to the report of 4840320329800A