

Thermal Shock Test
 FO-QA-49
 Issue #1 Date: 17/7/2019
 Rev #0

**Thermal-Shock Test
 According to: Shower Trays EN 14527
 Bathtubs EN 14516**

Model	Sophia Se Cor. Left	Production Date	4-46-19
Dimension	170x75 cm	Weight	54.5 Kg
Reference	6539	Color	White

Start Date	19/11/2019	End Date	23/11/2019
-------------------	------------	-----------------	------------

Visual Examination	Result	Specification
Test A 1 cycle (90C/12C)	No Deformation	No Deformation

Thermal Shock	Result	Specification
Test B 1st Cycle (75C/12C)	No Deformation	No Deformation

Thermal Shock	Result	Specification
Test B 1st 10 Cycles (75C/12C)	No Deformation	No Deformation

Visual Examination	Result	Specification
Test B 100 Cycles (75C/12C)	No Deformation	No Deformation

Water retention test	Result	Specification
After finishing test	No Water Retention	No Water retention

Remarks,

Testing Engineer/

 23/11/2019

Test Report
Chemical-Stain Resistance Test
According to EN 14516

Model : Sophia Se Cor.Left
Date : 17/11/2019
Material : Acrylic
Color : White
Dimension : 170X75 cm

Test Conditions :

1- Ambient Temperature Of $23 \pm 5 \text{ C}^\circ$

Procedure :

- Select an area to be tested.
- Use each test area only once for each application. Clean the test area thoroughly with hot soapy water, rinse and wipe dry with a clean dry cloth.
- At each of the test areas deposit a drop of the test solution. Cover the drop with a watch glass concave face downwards. The drop size shall be such that it is completely covered by the watch glass. Leave for (120 ± 5) min with the test area protected from sunlight.
- Thoroughly rinse the test areas with de-ionised water and visually check for any adverse change in appearance. If any deterioration is noticed, dip the foam disc in de-ionised water and place it on the surface that was tested. Rotate the cleaning device at a speed of 60 min⁻¹. Clean for 30 revolutions.
- Rinse with de-ionised water, dry and visually re-examine the test areas. If any deterioration persists, repeat the cleaning process using the abrasive comprising 12 h-alumina suspended in water and reexamine.

Agents	Time (min)	Results	Notice
Acetic acid (CH ₃ COOH), 10 % V/V	(120 ± 5)	Pass	
Sodium hydroxide (NaOH), 5 % m/m		Pass	
Ethanol (C ₂ H ₅ OH), 70 % V/V		Pass	
Sodium hypochlorite (NaOCl), 5 % active chlorine (Cl ₂) a		Pass	
Methylene blue, 1 % m/m		Pass	

Tested by/

Alaa Ezzat

Testing Manager/

Eng. Mostafa Khalifa

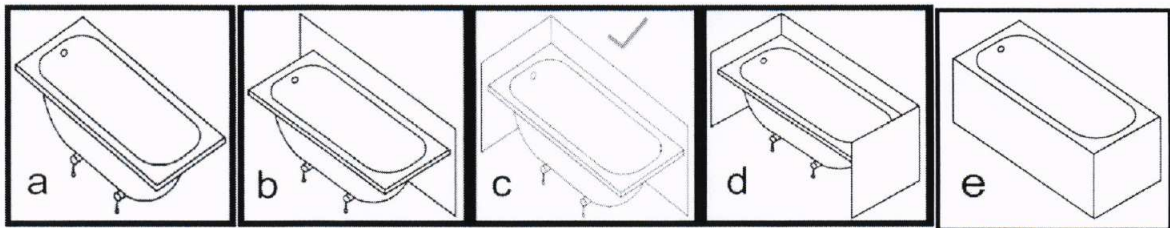

17/11/2019

Testing Inspection
 FO-QA-53
 Issue #1 Date #12/8/2018
 Rev #0

Static Load Test for Bathtub (EN 14516)

Model : Sophia SE Corner left
 Code : 6539
 Prod.Date : 4 46 19
 Date : 18/11/2019

Size : 170*75 cm
 Color : White
 Weight : 54.5 kg
 Client : Balneo





	Position 1	for 10 min
	Visual inspection	No Deformation
	Load in Bottom Position 1	
Visually there shall be no cracks or deformations		

	Position 2	for 10 min
	Visual inspection	No Deformation
	Load in Bottom Position 2	
Visually there shall be no cracks or deformations		

Note: The load weight at position one equal the water capacity weight + Human weight

The load weight at position two equal the water capacity weight only



Testing Manager/
 Eng. Mostafa Khalifa

(Handwritten signature)
 18/11/2019

Cleanability Tests for Bathtubs According to (EN 14516)

Model	Sophia SE CL	Color	White
Size	170x75 cm	Weight	54.5 kg
Code	6539	Production Date	4 46 19
Date	18/11/2019	Client :	Balneo

	Result	Specification
Appearance of surface	Pass	the surfaces intended to come into contact with water shall be visibly smooth, non-absorbent and free from inaccessible corners that would impair the cleanability

	Result	Specification
Water Drainage	Pass	All water shall empty from the bathtub unless prevented by surface tension

Remarks	Signature :
	