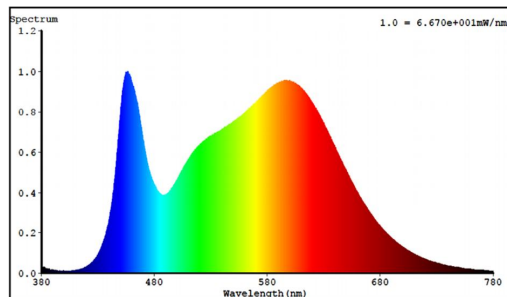


| | |
|---|--|
| EAN | 3276007962925 |
| Product Supplier reference | MQY85-3W-9003-3P-D |
| Type of product | Containing product |
| Supplier's address | ADEO Services - 135 rue Sadi Carnot - CS00001. 59790 RONCHIN |
| Supplier's name or trade mark | INSPIRE |
| Replaceability of Light source | by qualified person |
| Replaceability of separate control gears | by qualified person |
| Light sources maker model | Y85 |
| Link to EU Product Data base | https://eprel.ec.europa.eu/screen/product/lightsources/2468558 |
| Spectral power distribution in the range 250 nm to 800 nm. at full-load |  |
| The reference control settings, and instructions on how they can be implemented, where applicable | |
| If the light source contains mercury: instructions on how to clean up the debris in case of accidental breakage | Not Applicable |
| Recommendations on how to dispose of the light source / Driver at the end of its life Directive 2012/19/EU | Electrical product must not be thrown out with domestic waste. They must be taken to a communal collecting point for environmentally friendly disposal in accordance with local regulations. Contact your local authorities or stockist for advice on recycling. |
| Driver maker model | XQ-GLP-0103220CCT |
| Maximum output power of the driver (for HL, LED and OLED) or the power of the light source for which the driver is intended (for FL and HID); | N/A |
| Type of light source(s) for which it is intended | LED |
| Efficiency in full-load | 0.76 |
| No-load power (Pno) (W) | 0.5 |
| Standby power (Psb) (W) | N/A |
| Standby power (Pnet) (W) | N/A |
| Driver suitable for dimming : | no |