


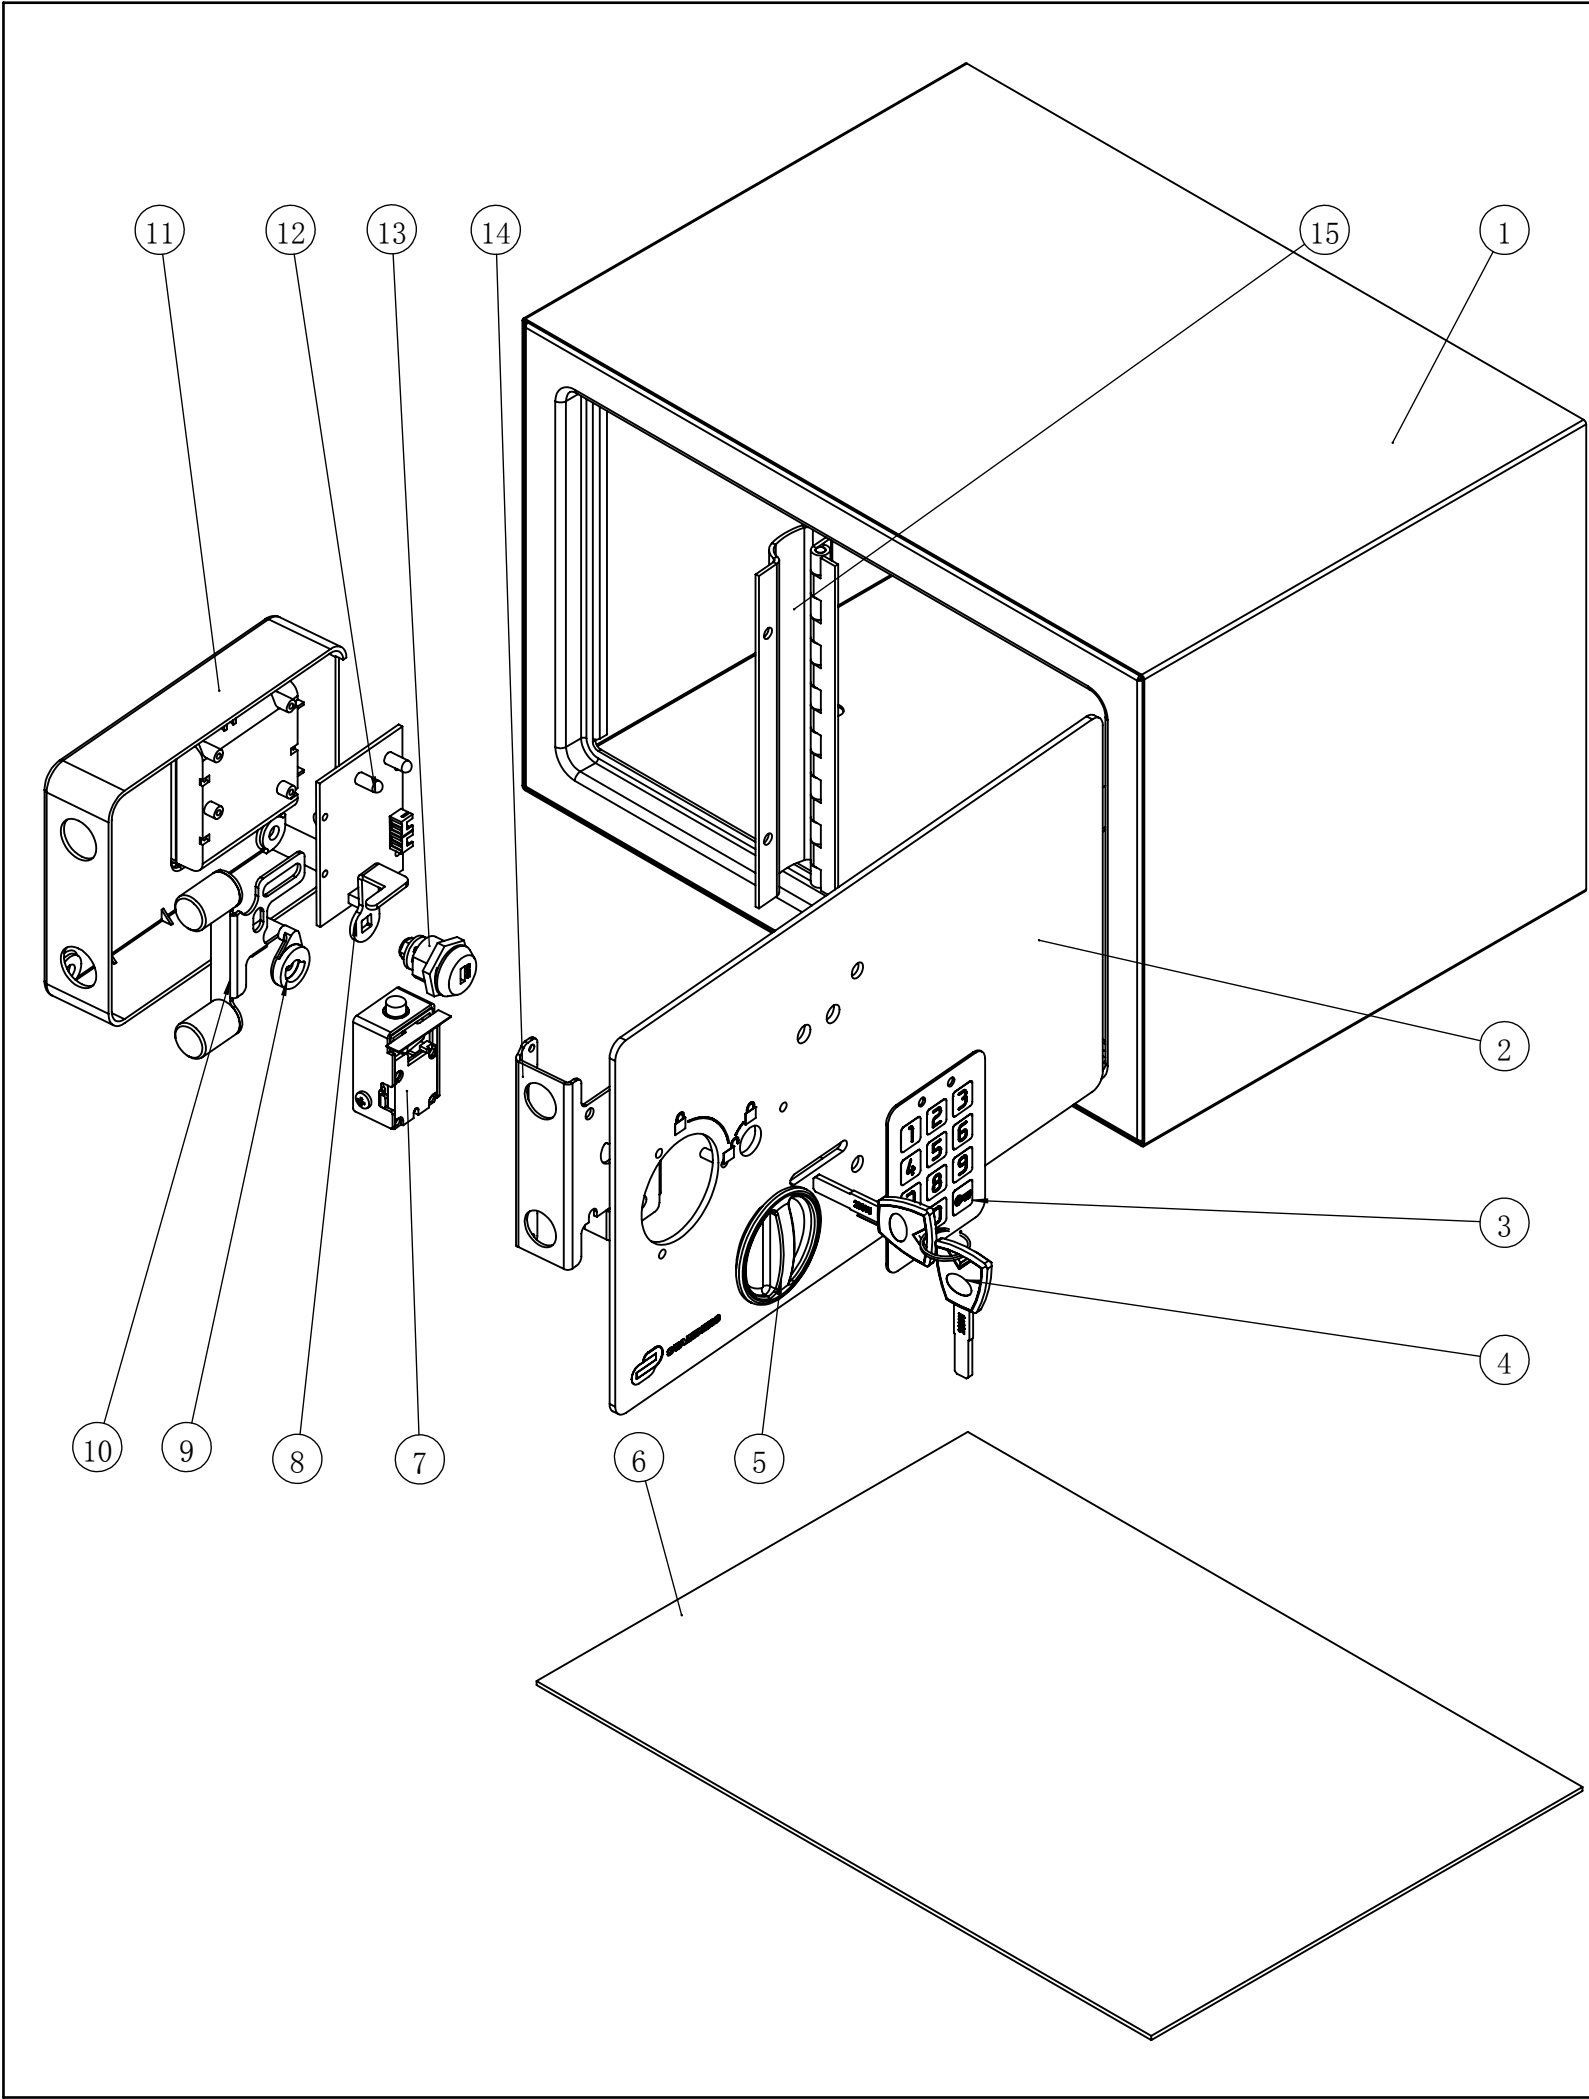

| Tolerance( not marked)ISO 2768-M |      |            |      |
|----------------------------------|------|------------|------|
| > 0.5-3                          | ±0.1 | > 30-120   | ±0.3 |
| > 3-6                            | ±0.1 | > 120-400  | ±0.8 |
| > 6-30                           | ±0.2 | > 400-1200 | ±1   |

|     |                       |                   |     |              |                                     |             |
|-----|-----------------------|-------------------|-----|--------------|-------------------------------------|-------------|
| 15  | Hinge                 | Q235              | 1   | 247g±25g     | Thickness 1.5mm                     | B-1781-0140 |
| 14  | Lock installing Plate | Q235              | 1   | 89g±9g       |                                     | B-1787-0900 |
| 13  | Override lock(L)      | Zinc Alloy        | 1   | 30.4g±3g     |                                     | B-1787-1100 |
| 12  | Circuit Board         | FR-1              | 1   | 14.8g±1.5g   |                                     | B-1787-0500 |
| 11  | Back cover            | ABS               | 1   | 84g±8g       | HxWxD:113x147x34.5<br>Thickness 2mm | B-1787-0300 |
| 10  | Bolt work             | Q235              | 1   | 92g±9.2g     |                                     | B-1787-0600 |
| 9   | Cam                   | Nylon             | 1   | 2g±0.2g      |                                     | B-1787-1400 |
| 8   | Plectrum              | Q235              | 1   | 8.1g±0.8g    |                                     | B-1787-0800 |
| 7   | Solenoid              | ABS, Cu, Al, Q235 | 1   | 75g±0.8g     |                                     | B-1787-1600 |
| 6   | Carpet                | Polyester         | 1   | 14.8g±1.5g   | Thickness 2mm                       | B-1782-2500 |
| 5   | Knob                  | ABS               | 1   | 6.6g±0.6g    | Diameter:50mm                       | B-1787-0700 |
| 4   | Key                   | ABS, Cu           | 2   | 21g±2g       |                                     | B-1787-1200 |
| 3   | Keypad                | PC                | 1   | 6g±0.6g      | HxW:80x60 Thickness 1mm             | B-1787-0400 |
| 2   | Door Assembling       | Q235              | 1   | 1123.8g±56g  | HxW:181x301<br>Thickness 3mm        | B-1787-0200 |
| 1   | Safe Body             | Q235              | 1   | 3442.3g±175g | HxWxD:230x350x250<br>Thickness 1mm  | B-1787-0100 |
| NO. | Part Name             | Material          | QTY | Weight       | Size&Spec                           | DWG NO.     |

|                         |                 |        |           |                    |              |
|-------------------------|-----------------|--------|-----------|--------------------|--------------|
| L1 16L Electronic lock  |                 |        |           | Material grade     |              |
| Exploded View           |                 | Weight |           | 5256.8g±262g       | Coating      |
| Matrix code             | 2022R10P04-0006 |        |           |                    |              |
| EAN                     | 3276007312560   |        |           |                    |              |
| Format                  | A3              | A0     | 15/4/2021 | Drawing creation   | ChenJiangnan |
| Scale                   | 1:3             | Rev.   | Date      | Update description | Done by      |
| Supplier's company name |                 | PREGEX |           |                    | PREGEX       |
| Supplier's reference    |                 | ENL1   |           |                    |              |