



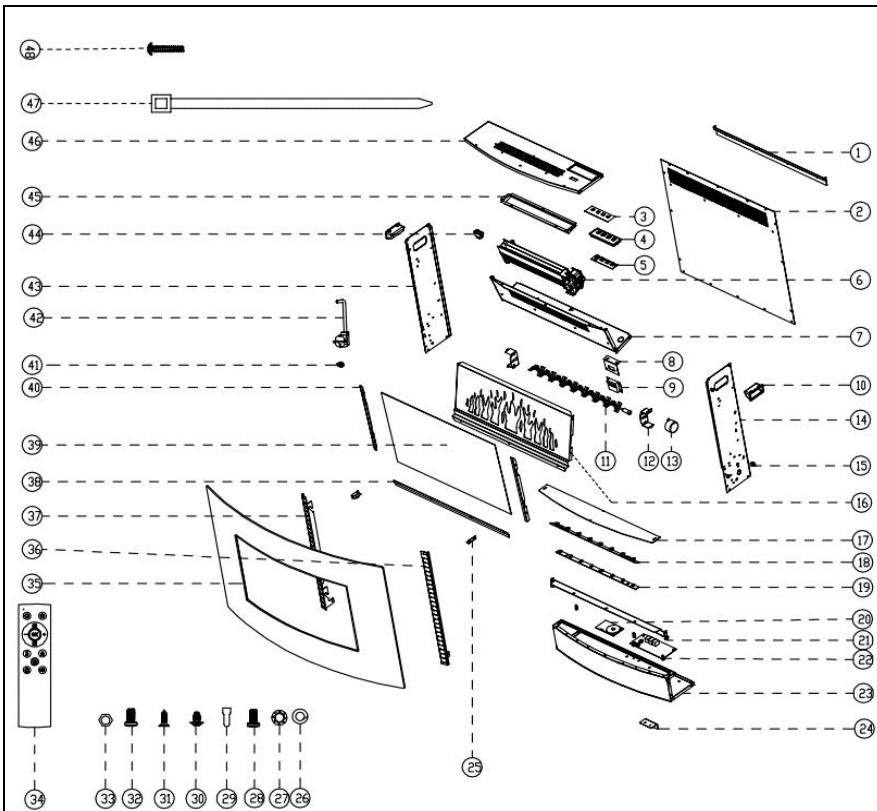

Gmerit holdings Ltd			
Design	Zhao Qi	DWG NO.	HB20-22BE A04
Model NO.	GMA2118	Description	Wall-Mounted Electric Fireplace
Checking	Yanxiao	Date	December 15th,2022

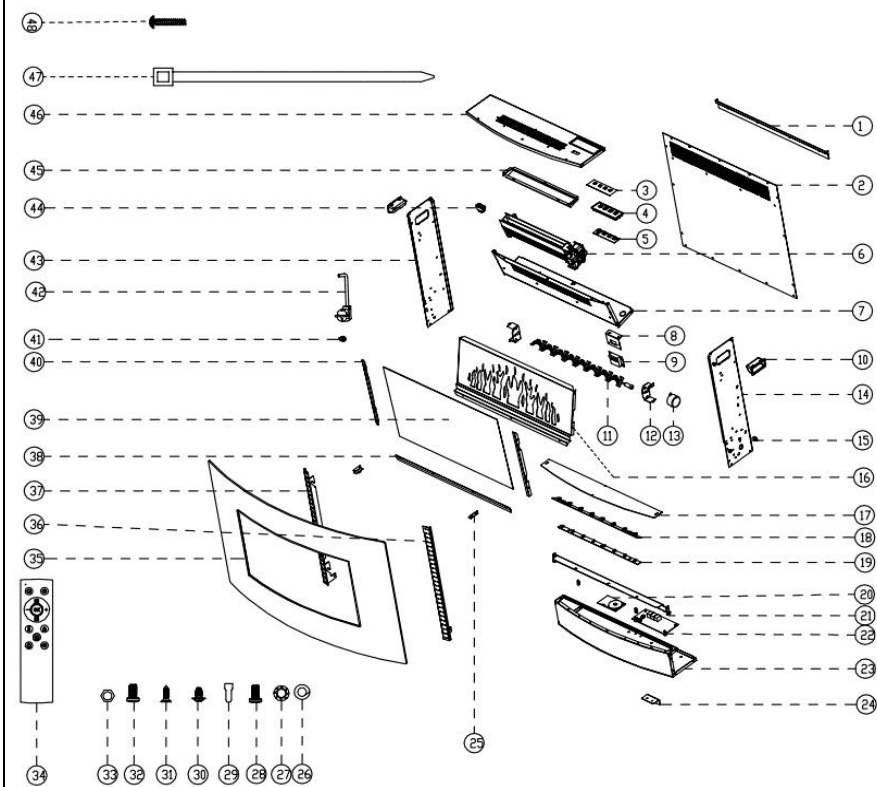

Gmerit holdings Ltd			
Design	Zhao Qi	DWG NO.	HB20-22BE A04
Model NO.	GMA2118	Description	Wall-Mounted Electric Fireplace
Checking	Deng Jianping	Date	December 15th,2022

34	Remote control	Infrared remote control/152*38*16mm	pc	1	✓	✓
33	Nut	M4	pc	4	✓	✓
32	Screw	M4*10mm	pc	2	✓	✓
31	Screw	ST3*6	pc	2	✓	✓
30	Screw	M4*6	pc	67	✓	✓
29	Wiring cap	CE2	pc	5	✓	✓
28	Screw	M4/copper	pc	1	✓	✓
27	Gasket	φ4/ground	pc	1	✓	✓
26	Gasket	φ4/ground	pc	1	✓	✓
25	Pressing plate	SPCC/T=0.6	pc	2	✓	✓
24	Lower mounting bracket	SPCC/T=1.2	pc	1	✓	✓
23	Bottom plate component	SPCC/T=0.6	pc	1	✓	✓
22	Control board	120V-240V/165*70mm	pc	1	✓	✓
21	Bottom grey light board holder	SPCC/T=0.6	pc	1	✓	✓
20	Speaker board	90.6*53mm	pc	1	✓	✓
19	Bottom grey light board	400*16mm	pc	1	✓	✓
18	Fire Light board	426*20mm	pc	1	✓	✓
17	PP board	SPCC/T=1.6	pc	1	✓	✓
16	Fire plate	SPCC/T=0.6	pc	1	✓	✓
15	NTC Bracket	ABS/4g	pc	1	✓	✓
14	Right side plate	SPCC/T=0.8	pc	1	✓	✓
13	Synchronous motor	220V-240V/15-18r	pc	1	✓	✓
12	Synchronous motor bracket	SPCC/T=0.8	pc	2	✓	✓
11	Reflective stripe	535*φ35mm	pc	1	✓	✓
10	Handle	ABS/9g	pc	1	✓	✓
9	Digital display	65*42mm	pc	1	✓	✓
8	Display bracket	SPCC/T=0.6	pc	1	✓	✓
7	Middle plate	SPCC/T=0.8	pc	1	✓	✓
6	Fan heating component	Heating element 220V-240V/2000W cross-flow fan 46300 with 85° manual thermostat	pc	1	✓	✓
5	Control board	106.5*28.5mm	pc	1	✓	✓
4	Control Box	ABS/14g	pc	1	✓	✓
3	Control panel sticker	PET=0.3	pc	1	✓	✓
2	Back plate	SPCC/T=0.6	pc	1	✓	✓
1	Wall-mounting bracket	SPCC/T=1.2	pc	1	✓	✓
Serials No.	Description	Material/Specification	Unit	Qty	220V-240V/50Hz	220V-240V/60Hz

Product Dimension	88.3*16.9*56cm
Technical function	220-240V~50Hz, 1680-2000W
	Electronic thermostat
	2 heat settings 1000W/2000W
	Realistic 2D Flame Effect in amber color
	With overheat safety protection
	With weekly personalized program
	With window detector function
	With 12-hour timer
	Flame brightness adjustable: 4 levels
	With keyboard lock
	With wood burning voice

48	Screw	M4*20mm	pc	2	✓	✓
47	Ribbon	3*100mm	pc	1	✓	✓
46	Top plate	SPCC/T=0.8	pc	1	✓	✓
45	Air duct	SPCC/T=0.6	pc	6	✓	✓
44	Switch	16A/250VAC	pc	1	✓	✓
43	Left side plate	SPCC/T=0.8	pc	1	✓	✓
42	Power cord	VDE H05VV-F 3G 1.0²mm 16A/250V	pc	1	✓	✓
41	wiring clip	6N-4	pc	1	✓	✓
40	left and right layers for PP board	SPCC/T=0.6	pc	2	✓	✓
39	PP board	568*330*1.6mm	pc	1	✓	✓
38	PP board upper layer	SPCC/T=1.0	pc	1	✓	✓
37	Left bracket for glass	SPCC/T=1.2	pc	1	✓	✓
36	right bracket for glass	SPCC/T=1.2	pc	1	✓	✓
35	Tempered glass	880*560*5mm	pc	1	✓	✓
Serials No.	Description	Material/Specification	Unit	Qty	220V-240V/50Hz	220V-240V/60Hz